


Early Learning Tilt & Touch Table

The robust and durable table uses the latest 10 point touch technology to allow a number of children to interact directly onto the screen.






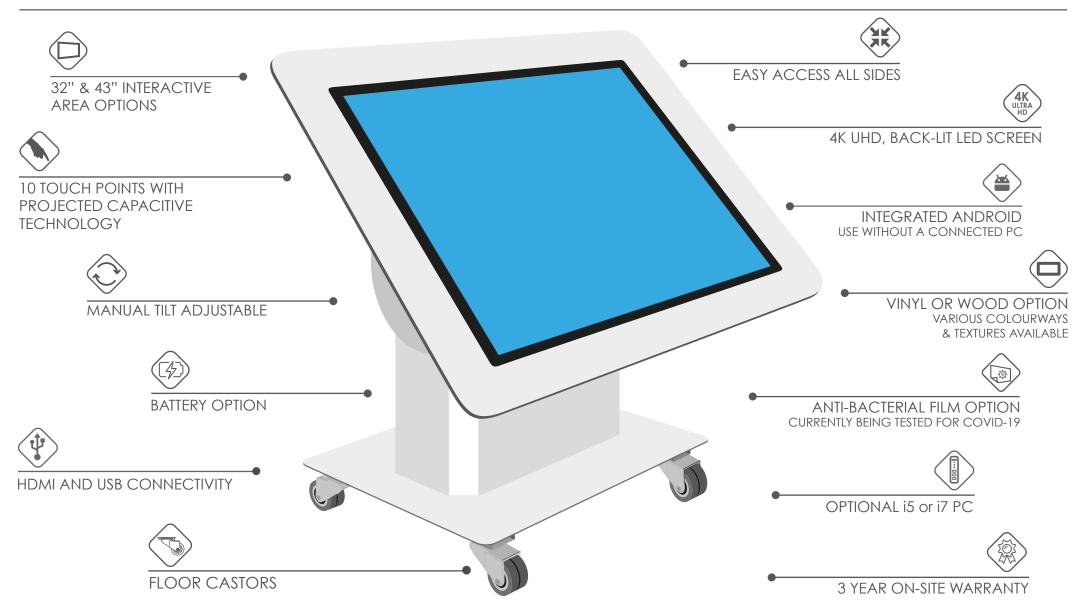



Early Learning Tilt & Touch Table with Projected Capacitive Screen

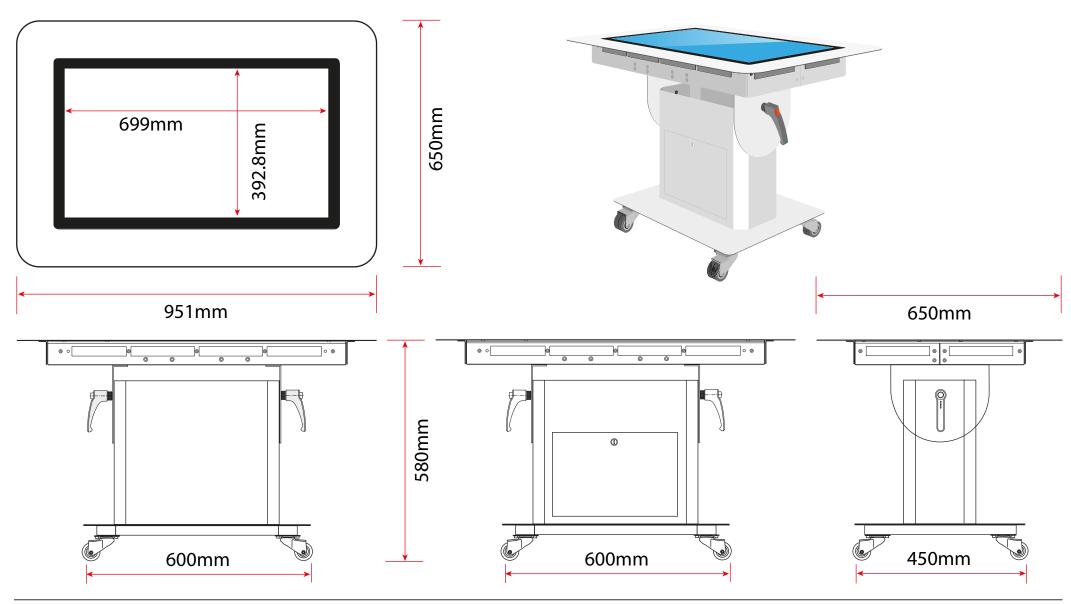






DISPLAY PANEL		
Screen Size	32" TFT-LCD	
Display area	392mm (H) x 696.2mm (W) 16:9	
Maximum Resolution	1920 x 1080	
Display colour	16.7M	
Pixel Pitch(mm)	0.1845 (H) x 0.1845 (V)	
Brightness (cd/m2)	2500 nit	
Contrast (Type)	35000 : 1	
Visual angle	178°/178°	
Response time	8ms	
Life (hrs)	>50,000 (hrs)	
TOUCH		
Specification	Projected Capacitive	
Touch points	10	
FEATURES		
Main chipset	MSD6A828, Quad Core	
RAM	2GB	
ROM	16GB	
Android version	Android 5.0.1	
MECHANICAL		
Monitor Size	756mm (w) x 450mm (h) x 48mm (d)	
Colour	Black	
Case	Metal +Aluminium	

CONNECTIVITY		
HDMI	2	
USB 3	2	
USB 2	1	
RGB PC in	1	
L/R audio input	1	
L/R audio output	1	
Speaker	2×5W(8Ω)	
POWER		
Input Voltage	AC100 ~ 240V 50 /60 HZ	
Maximum power consumption	<80W	
Standby power consumption	<1W	
TEMPERATURE		
Working temperature	0°C ~ 50°C	
Storage temperature	-20°C ~ 60°C	
Working humidity	10%~90%	
WARRANTY		
3 year on-site warranty as standard		
Extended warranties and SLA's available at an additional cost		





32inch Firebolt Touch Screen with Projected Capacitive Technology

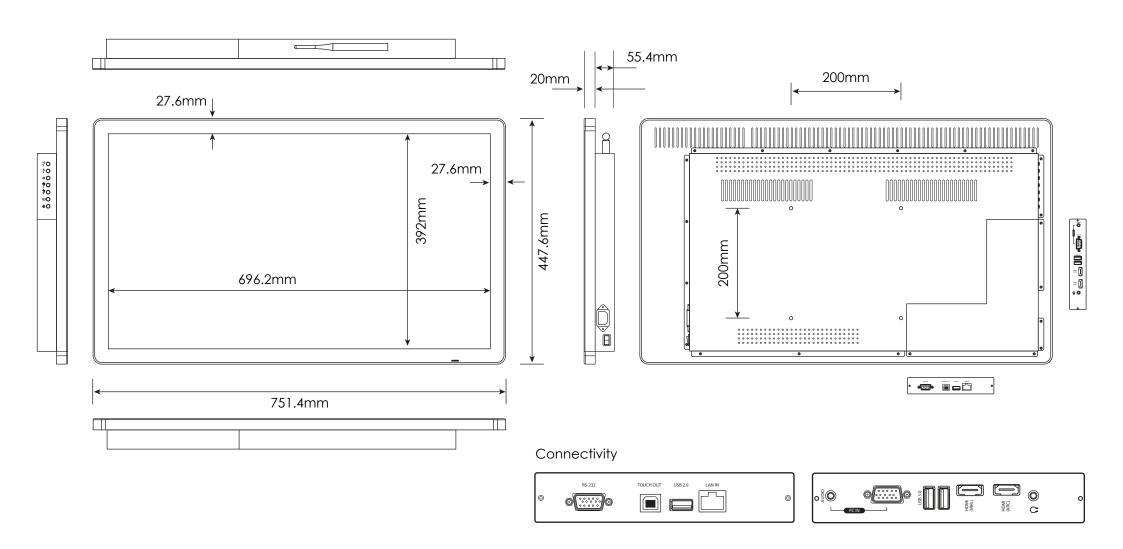



DISPLAY PANEL		
Screen Size	43" TFT-LCD	
Display area	940mm (H) x 527mm (W) 16:9	
Maximum Resolution	1920 x 1080	
Display colour	16.7M	
Pixel Pitch(mm)	0.1845 (H) x 0.1845 (V)	
Brightness (cd/m2)	350cd/m ²	
Contrast (Type)	2000:1	
Visual angle	178°/178°	
Response time	5ms	
Life (hrs)	>60,000 (hrs)	
TOUCH		
TOUCH		
TOUCH Specification	Projected Capacitive	
	Projected Capacitive ±2mms	
Specification		
Specification Positioning	±2mms	
Specification Positioning Transmittance	±2mms ≥92%	
Specification Positioning Transmittance Hardness	±2mms ≥92% 7H	
Specification Positioning Transmittance Hardness Touch points	±2mms ≥92% 7H	
Specification Positioning Transmittance Hardness Touch points Response time	±2mms ≥92% 7H	
Specification Positioning Transmittance Hardness Touch points Response time MECHANICAL	±2mms ≥92% 7H 10 ≤10ms	

CONNECTIVITY		
HDMI	1	
USB	2	
VGA	1	
RJ45	1	
L/R audio input	1	
L/R audio output	1	
Speaker	2×5W(8Ω)	
POWER		
Input Voltage	AC100 ~ 240V 50 /60 HZ	
Maximum power consumption	<90W	
Standby power consumption	<5W	
TEMPERATURE		
Working temperature	0°C ~ 50°C	
Storage temperature	-20°C ~ 60°C	
Working humidity	85%	
Storage humidity	85%	
WARRANTY		
3 year on-site warranty as standard		
Extended warranties and SLA's available at an additional cost		





43inch Electra Touch Screen with Projected Capacitive Technology

