
Promultis Electra Pro Touchscreens

The Promultis Electra Touchscreens come with an Integrated Web Camera, 10 PCAP Touch Points, Integrated Android OS, & much more!





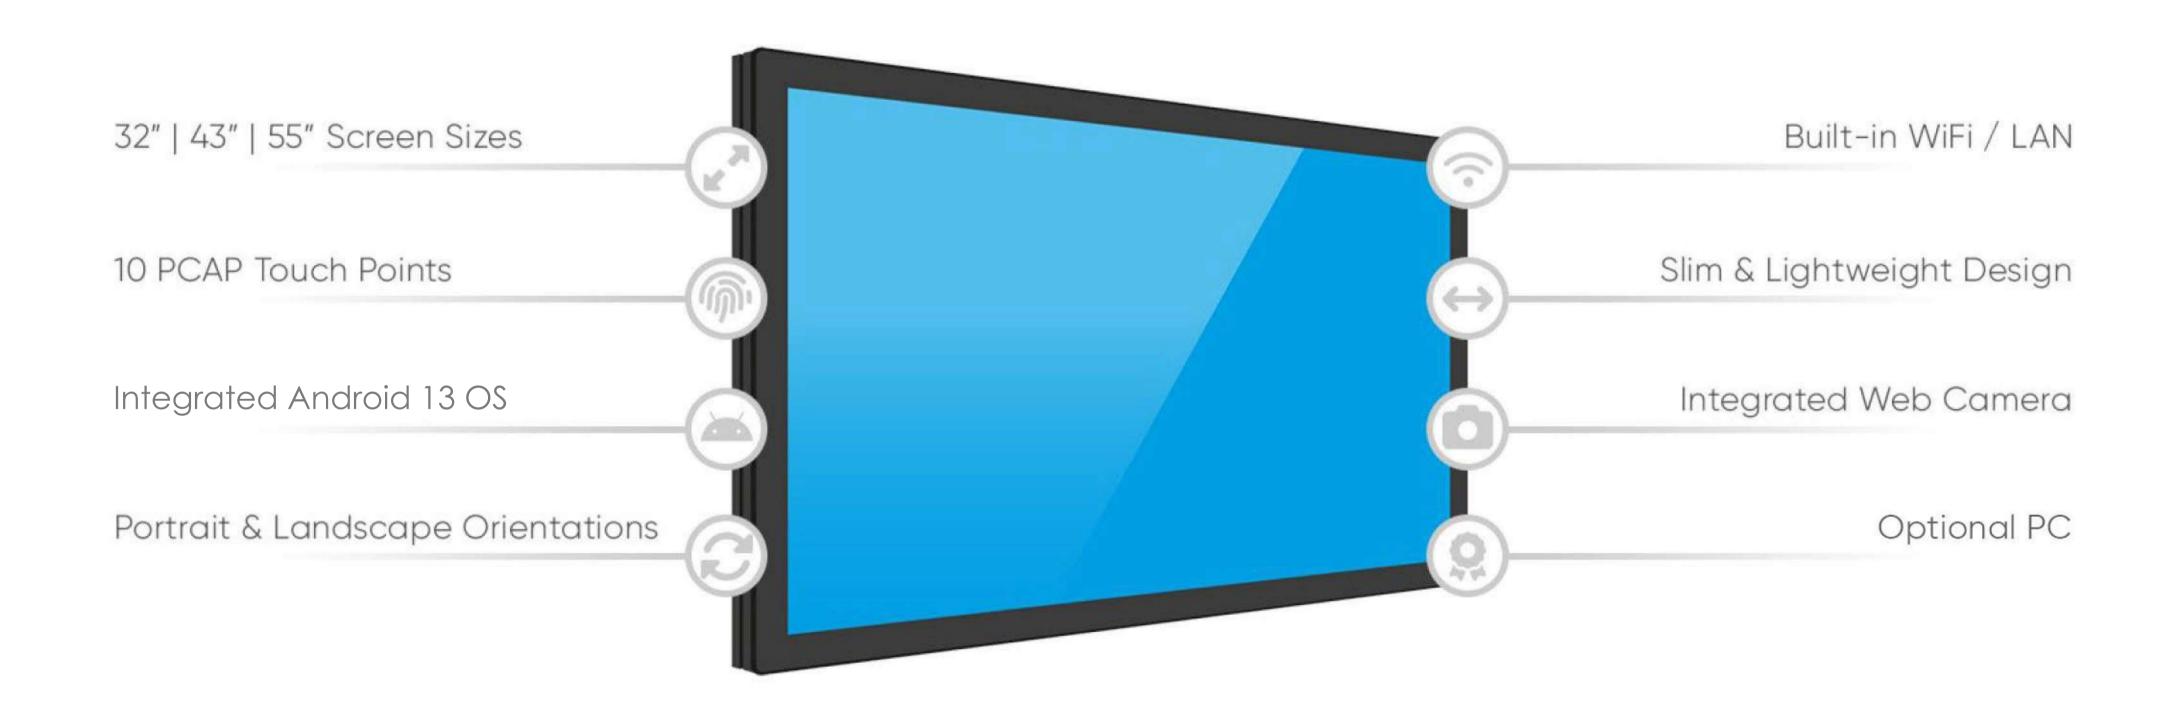

	SPECIFICATIONS	
Panel Size	32" TFT-LCD	
Display Area (mm) Mode	699(W)x392.8(H) 16:9	
Maximum Resolution	3840x2160	
Display Colour	16.7M	
Pixel Pitch (mm)	0.363(H)×0.363(V)	
Brightness (nits)	350cd/m ²	
Contrast	2000:1	
Visual Angle	178°/178°	
Response Time	5ms	
Life (hours)	>60,000(hrs)	
	INPUT & OUTPUT	
Web Camera	5MP	
OPS Slot	1	
HDMI	3	
USB	2	
VGA		
Lan	1	
Audio		
RS232	1	
Speaker	2 x 5W (9Ω)	
VIDEO		
Colour System	PAL/NTSC/SECAM	







	POWER	
Power supply	AC100~240V 50 /60 HZ	
Maximum power consumption	≤100W	
Standby power consumption	<5W	
TEMPERATURE		
Working temperature	0°C~50°C	
Storage temperature	-20 °C ~ 60 °C	
Working humidity	85%	
Storage humidity	85%	
	ANDROID SPECIFICATIONS	
Andriod system	Google Android 13 support multi-language	
Ram	4G DDR4	
CPU	4-core ARM Cortex-A55/2.0 Ghz	
Rom	32G	
	APPEARANCE	
Colour/appearance	White, black, customised	
Case	Metal case SPCC	
Installation	Wall mount	
Quality Standard	CE, CCC	
	TOUCH PANEL	
Specification	Projected Capacitive Touch	
Positioning accuracy	±2mms	
Transmittance	≥92%	





Hardness	7H	
Click manner	10 Touch Points	
Response time	≤10ms	
Life time	More than 600 million times	
	DETAILED FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI	
Audio format	Wave/MP3/WMA/AAC	
Image format	JPEG/BMP/TIFF/PNG/GIF	
Image resolution	480P/720P/1080P/2160P	
WEIGHT		
32" Electra weight	15KG	
32" Electra weight in packaging	17KG	

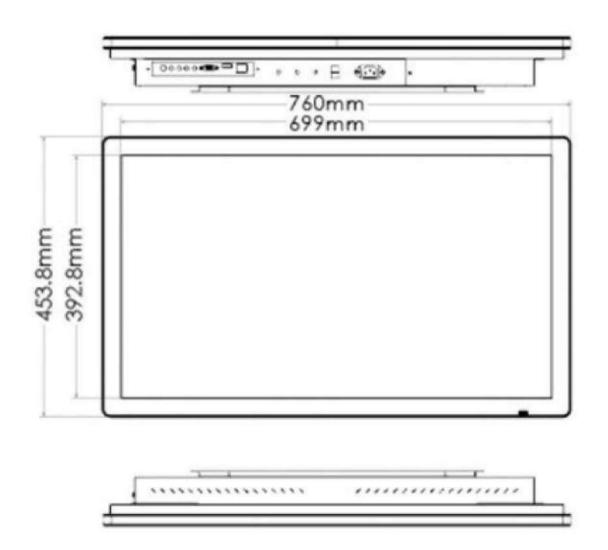

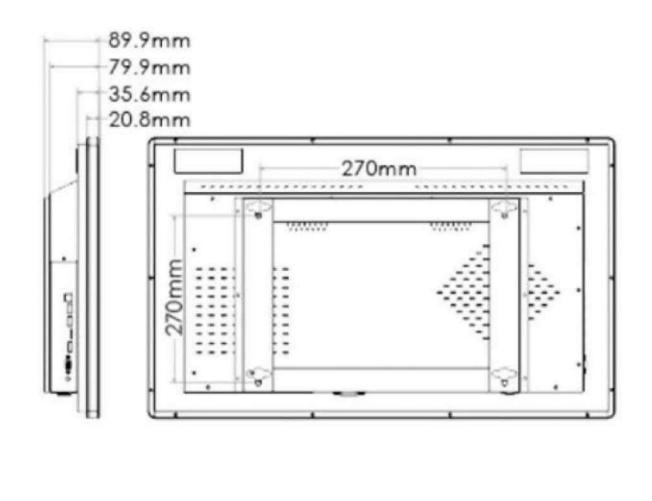





	ANDROID SPECIFICATIONS		
Panel size	43" TFT-LCD		
Display area(mm)/mode	941(W)×529(H) 16:9		
Maximum resolution	3840×2160		
Display colour	16.7M		
Pixel Pitch(mm)	0.49(H)×0.49(V)		
Brightness (nits)	350cd/m ²		
Contrast	3000:1		
Visual angle	178°/178°		
Response time	5ms		
Life(hrs)	>60,000(hrs)		
	INPUT & OUTPUT		
Web Camera	5MP		
OPS Slot	1		
HDMI	3		
USB	2		
VGA	1		
LAN			
Audio	1		
RS232	1		
Speaker	2 x 5W (9Ω)		






43 Electra Pro Touchscreen Specifications			
	VIDEO		
Colour System	PAL/NTSC/SECAM		
	POWER		
Power supply	AC100~240V 50 /60 HZ		
Maximum power consumption	≤120W		
Standby power consumption	<5W		
	TEMPERATURE		
Working Temperature	0°C ~ 50°C		
Storage Temperature	-20°C ~ 60°C		
Working Humidity	85%		
Storage Humidity	85%		
	ANDROID SPECIFICATIONS		
Android System	Google Android 13 support multi-language		
RAM	4G DDR4t		
CPU	4-core ARM Cortex-A55/2.0 Ghz		
Rom	32G		
APPEARANCE			
Colour/Appearance	White/Black/Custom		
Case	Metal Case SPCC		
Installation	Wall Mount		
Quality Standard	CE, CCC		





	TOUCH PANEL	
Specification	Projected Capacitive Touch	
Positioning accuracy	<u>+</u> 2mm	
Transmittance	≥92%	
Hardness	7H	
Click manner	10 Touch Points	
Response time	≤10ms	
Life time	More than 600 million times	
	DETAILED FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI	
Audio format	Wave/MP3/WMA/AAC	
Image format	JPEG/BMP/TIFF/PNG/GIF	
Image resolution	480P/720P/1080P/2160P	
WEIGHT		
43" Electra weight	24kg	
43" Electra weight in packaging	26kg	
The second for the second seco		

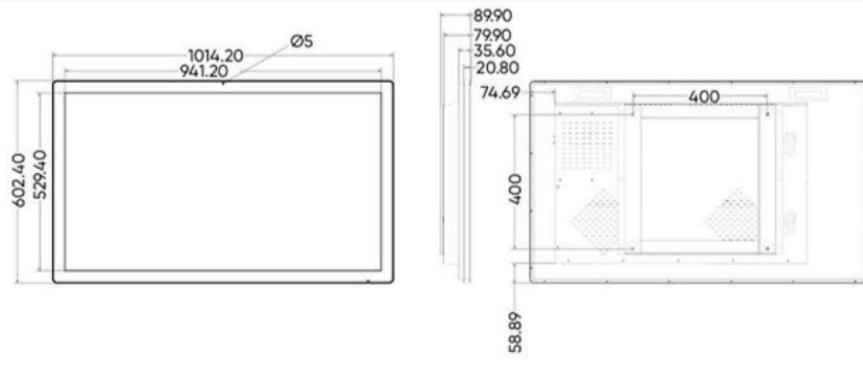





	SPECIFICATIONS SPECIFICATIONS		
Panel size	55" TFT-LCD		
Display area(mm)/mode	1209(W)x680(H) 16:9		
Maximum resolution	3840×2160		
Display colour	16.7M		
Pixel Pitch (mm)	0.43(H)×0.43(V)		
Brightness (nits)	350cd/m ²		
Contrast	3000:1		
Visual angle	178°/178°		
Response time	5ms		
Life (hrs)	>60,000(hrs)		
	INPUT & OUTPUT		
Web camera	5MP		
OPS slot	1		
HDMI	3		
USB	2		
VGA	1		
Lan	1		
Audio			
RS232	1		
Speaker	2×5W(9Ω)		
VIDEO			
Colour System	PAL/NTSC/SECAM		





	POWER
Power Supply	AC100~240V 50 /60 HZ
Maximum Power Consumption	≤160W
Standby Power Consumption	<5W
	TEMPERATURE
Working Temperature	0 ° C ~ 50 °C
Storage Temperature	-20 ° C ~ 60 ° C
Working Humidity	85%
Storage Humidity	85%
	ANDROID SPECIFICATIONS
Android System	Google Android 13 support multi-language
Ram	4G DDR4
CPU	4-core ARM Cortex-A55/2.0 Ghz
Rom	32G
	APPEARANCE
Colour / Appearance	White, black, customised
Case	Metal case SPCC
Installation	Wall mount
Quality Standard	CE, CCC
	TOUCH PANEL
Specification	Projected Capacitive Touch
Positioning Accuracy	±2mms
Transmittance	≥92%





Hardness	7H	
Click manner	10 Touch Points	
Response time	≤10ms	
Life time	More than 600 million times	
	DETAILED FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI	
Audio format	Wave/MP3/WMA/AAC	
Image format	JPEG/BMP/TIFF/PNG/GIF	
Image resolution	480P/720P/1080P/2160P	
WEIGHT		
55" Electra weight	38kg	
55" Electra weight in packaging	41kg	

