



[promultis] multitouch overlay

converts any screen to a touchscreen



Up to 32 Touches



Simple to Install



Splash Proof

Includes..
NIITEB
Snowflake
[35 Multitouch Applications!]

Available from 15" | Custom sizes available

2, 6, 12 or 32 Individual Touch Points

Ultra Slim - As Slim as 4.6mm

Splashproof Design

Android Compatible


The ProMultis Overlay offers an instant multi touch solution for virtually any LED, LCD or plasma screen. Simple to fit to any screen from 15" and available up to any custom size, with 2, 6, 12 or 32 touch points

[features]

Make your screen interactive! Simple to install, simple to use


The ProMultis Multitouch Overlay provides an easy and reliable multi-touch solution to help deploy multitouch technology instantly to existing screens without minimal configuration

Encourage interaction and collaboration through simple, intuitive gestures creating an exciting work environment and desire for exploration and discovery.

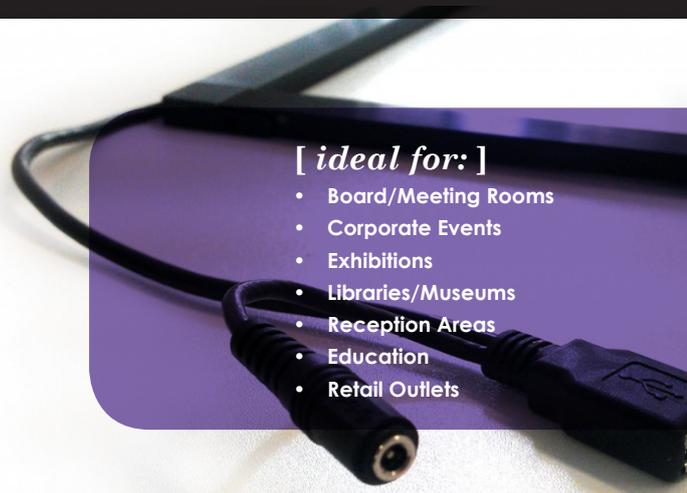

[ideal for:]

- Board/Meeting Rooms
- Corporate Events
- Exhibitions
- Libraries/Museums
- Reception Areas
- Education
- Retail Outlets

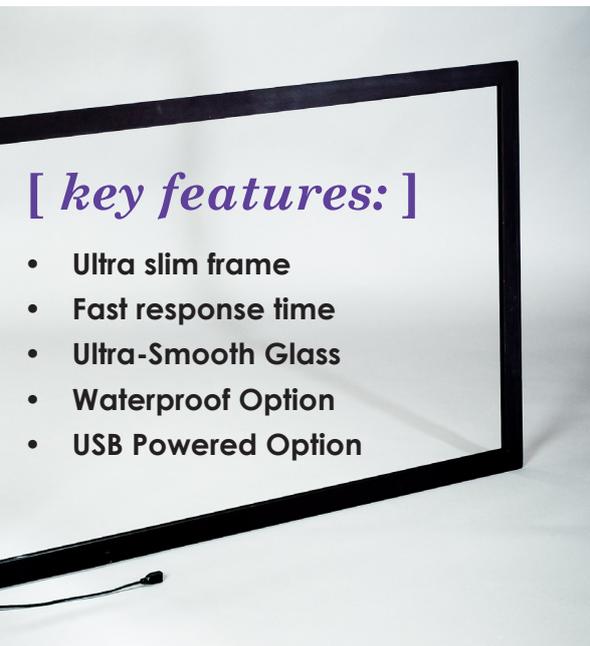

[key features:]

- Ultra slim frame
- Fast response time
- Ultra-Smooth Glass
- Waterproof Option
- USB Powered Option

Use it virtually anywhere, even outdoors!

Because of the simplicity and portability of the ProMultis Overlay, it can be easily used in meeting rooms, conferences, exhibitions, events, classrooms and command & control areas. With its integrated splash proof (or optional waterproof) technology, it can even be used outside.

The G4 Overlay can be easily mounted onto any LCD or Plasma TV screen and used in conjunction with a portable height adjustable stand or even fitted to a window!

Available in 2 Models:



- 8.6mm thick
- Starting from 32" (diagonal)
- Sample rate up to 200 fps
- PQ Labs patented ultra-smooth glass
- (2 x smoother than the iPad)
- Windows 8/7/Vista/XP, Mac OS X,
- Anti-Spill (customizable to IPX4)
- Requires power supply (supplied)



- From 4.7mm thick
- Starting from 15" (diagonal)
- Sample rate up to 200 fps
- PQ Labs Patented Ultra-Smooth Glass
- (2 x smoother than the iPad)
- Plug & Play Drivers for: Windows 8/7/ Vista/XP, Mac OS X, Ubuntu / Fedora
- Built-in IP X4 Waterproof

Multitouch Solutions From ProMultis

[promultis]
table
multitouch
surface
computing

[promultis]
drafting table
the multitouch
solution for design
professionals

[promultis]
video walls
fully bespoke
multitouch
video walls

G4 Overlay specification



Custom Colours Available




Splash proof



*32" - 350"
Or custom sizes*



Up to 32 Touches



Simple to Install



Mains Powered

Available Sizes	32", 40", 42", 46", 47", 50", 52", 55", 60", 65", 70", 80" *other sizes are available upon request
Thickness	8.6 mm
Touch Points	True Multi-Touch (Detects up to 32 touch points simultaneously) G4 Dual: 2 touch points G4 Basic: 6 touch points G4 Standard: 12 touch points G4 Plus: 32 touch points
Glass	Ultra-smooth glass 32"-47": 3 mm tempered glass 50"-70": 4 mm tempered glass
Sample Rate	Up to 200 fps
Power Supply	Power adapter
Connectivity	USB 2.0
Programming Interface	Multitouch SDK / Windows Native Touch / TUIO
USB Extension	100 meters with Extender
Waterproof	Anti-spill (Customizable to IP X4)
Supported OS	Windows 8/7/Vista/XP, Mac OS X, Ubuntu/Fedora



[promultis] multitouch overlay

For more exciting multitouch products visit

www.promultis.info

Or Call +44 (0) 239 251 2794

G4S Overlay specification



Custom Colours Available



IP X4 Waterproof



*15" - 350"
Or custom sizes*



Up to 32 Touches



Simple to Install



USB Powered

Available Sizes	15", 17", 19", 21.5", 24", 27", 32", 40", 42", 46", 55", see G4 for more standard sizes. Customized sizes available upon request
Dimension	Touch Bezel Thickness (from glass to frame surface) <ul style="list-style-type: none"> • 21.5 inch – 27 inch: 4.7 mm • 32 inch – 55 inch: 4.9 mm Frame Thickness (with glass) <ul style="list-style-type: none"> • 21.5 inch – 27 inch: 6.9 mm • 32 inch – 55 inch: 8.8 mm
Touch Points	G4S Plus: 32 Touch Points G4S Standard: 12 Touch Points G4S Basic: 6 Touch Points G4S Dual: 2 Touch Points
Glass	Embedded Glass Ultra-smooth glass Glass Thickness <ul style="list-style-type: none"> • 21.5 inch – 27 inch: 2 mm • 32 inch - 46 inch: 3 mm • 55 inch: 4 mm
Sample Rate	Up to 200 fps
Power Supply	21.5 inch - 46 inch: USB Powered 55 inch: 5V/4A power adapter
Connectivity	USB 2.0 (Full speed), compatible with USB 1.1 port, HID compliant, plug-and-play compatible USB A Type Connection
Program Interface	Multitouch SDK / Windows Native Touch / TUIO
USB Extension	100 meters with Extender
Waterproof	IP X4 (free of charge), Customizable to IP X6
Supported OS	Windows 8/7/Vista/XP, Mac OS X, Ubuntu/Fedora



[promultis] multitouch overlay

For more exciting multitouch products visit

www.promultis.info

Or Call +44 (0) 239 251 2794