


Allure Kiosk


Create an inviting and imersive information point with this slim, sleek Kiosk. Ideal for digital signage and wayfinding solutions.





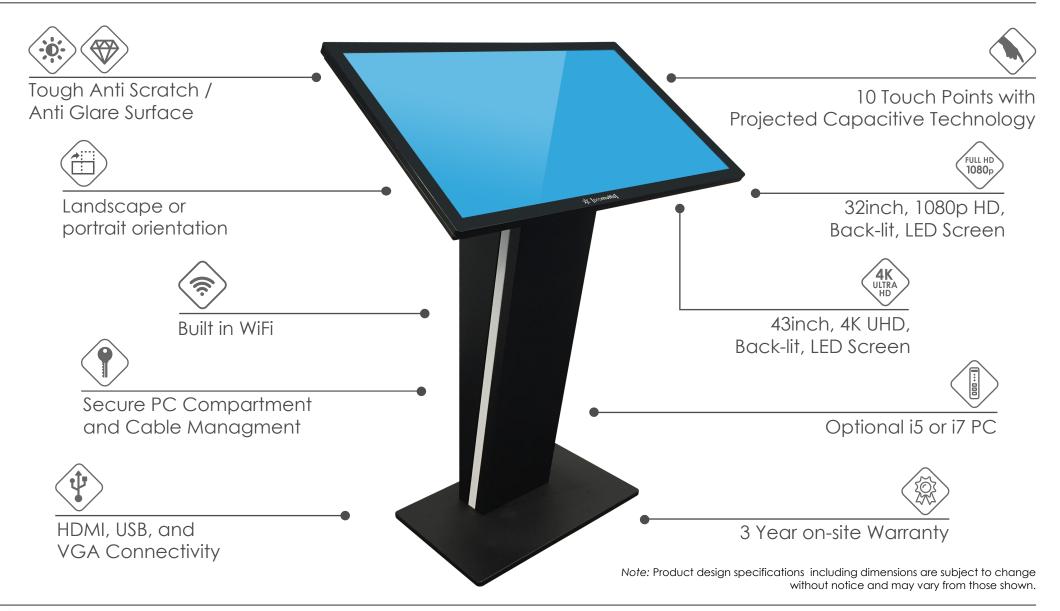


Allure Kiosk with 43" Electra Projected Capacitive Touch Screen

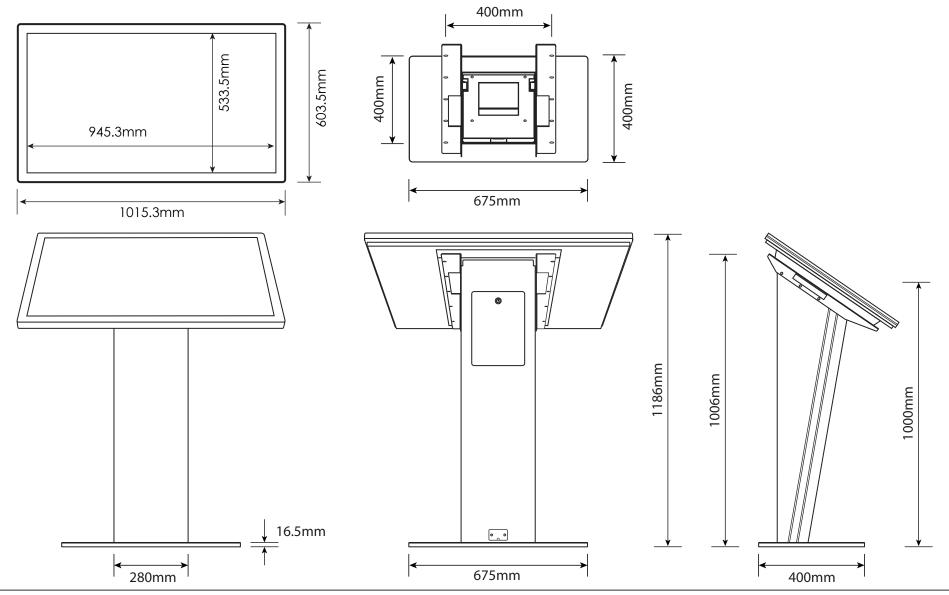






Allure Kiosk with 32" Firebolt Projected Capacitive Touch Screen

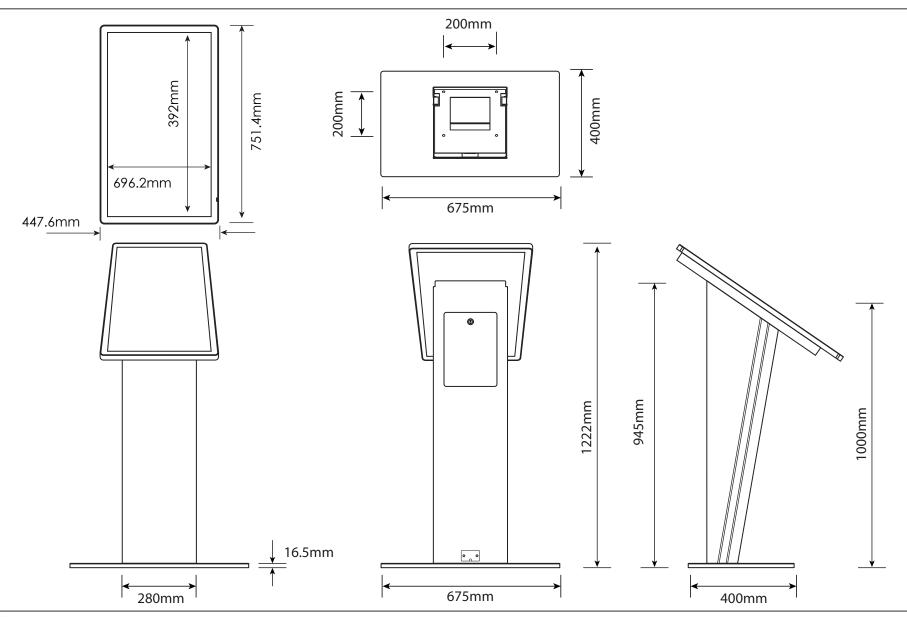





Allure Kiosk with 32" Firebolt Projected Capacitive Touch Screen

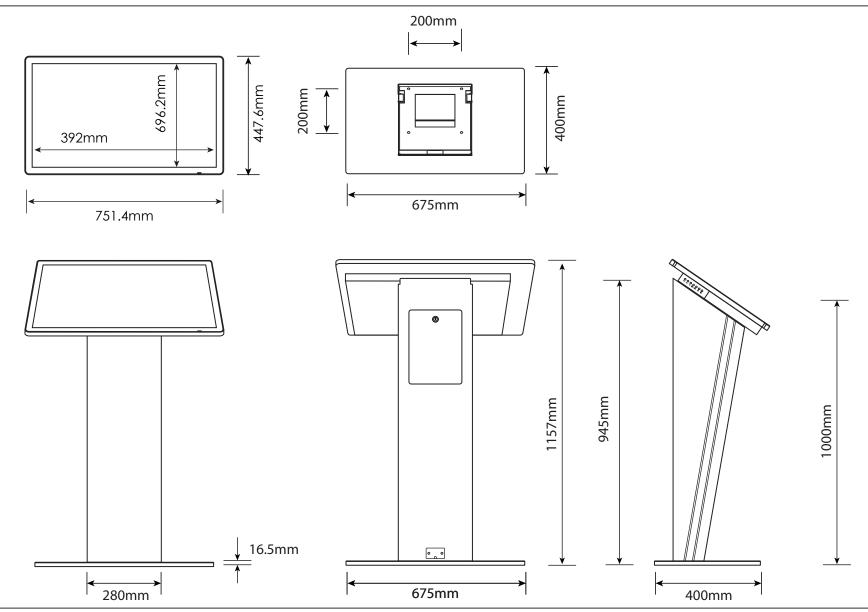




DISPLAY PANEL		
Screen Size	43" TFT-LCD	
Display area	940mm (H) x 527mm (W) 16:9	
Maximum Resolution	1920 x 1080	
Display color	16.7M	
Pixel Pitch(mm)	0.1845 (H) × 0.1845 (V)	
Brightness (cd/m2)	350cd/m ²	
Contrast (Type)	2000:1	
Visual angle	178°/178°	
Response time	5ms	
Life (hrs)	>60,000 (hrs)	
TOUCH		
Specification	Projected Capacitive	
Positioning	±2mms	
Transmittance	≥92%	
Hardness	7H	
Touch points	10	
Response time	≤10ms	
MECHANICAL		
Monitor Size	1010mm (w) x 597mm (h) x 65mm (d)	
Colour	Black	
Case	Metal + Aluminium	

CONNECTIVITY		
HDMI	1	
USB	2	
VGA	1	
RJ45	1	
L/R audio input	1	
L/R audio output	1	
Speaker	2×5W(8Ω)	
POWER		
Input Voltage	AC100 ~ 240V 50 /60 HZ	
Maximum power consumption	<90W	
Standby power consumption	<5W	
TEMPERATURE		
Working temperature	0°C ~ 50°C	
Storage temperature	-20°C ~ 60°C	
Working humidity	85%	
Storage humidity	85%	
WARRANTY		
3 year on-site warranty as standard		
Extended warranties and SLA's available at an additional cost		





43inch Electra Touch Screen with Projected Capacitive Technology

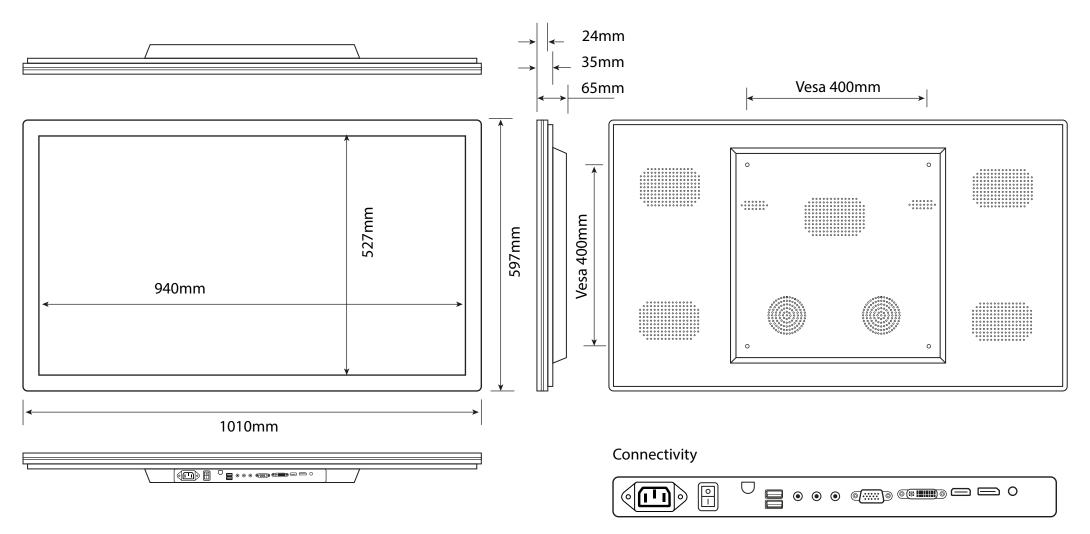



DISPLAY PANEL		
Screen Size	32" TFT-LCD	
Display area	392mm (H) x 696.2mm (W) 16:9	
Maximum Resolution	1920 x 1080	
Display color	16.7M	
Pixel Pitch(mm)	0.1845 (H) x 0.1845 (V)	
Brightness (cd/m2)	2500 nit	
Contrast (Type)	35000:1	
Visual angle	178°/178°	
Response time	8ms	
Life (hrs)	>50,000 (hrs)	
TOUCH		
Specification	Projected Capacitive	
Touch points	10	
FEATURES		
Main chipset	MSD6A828, Quad Core	
RAM	2GB	
ROM	16GB	
Android version	Android 5.0.1	
MECHANICAL		
Monitor Size	756mm (w) x 450mm (h) x 48mm (d)	
Colour	Black	
Case	Metal +Aluminium	

CONNECTIVITY		
HDMI	2	
USB 3	2	
USB 2	1	
RGB PC in	1	
L/R audio input	1	
L/R audio output	1	
Speaker	2×5W(8Ω)	
POWER		
Input Voltage	AC100 ~ 240V 50 /60 HZ	
Maximum power consumption	<80W	
Standby power consumption	<1W	
TEMPERATURE		
Working temperature	0°C ~ 50°C	
Storage temperature	-20°C ~ 60°C	
Working humidity	10%~90%	
WARRANTY		
3 year on-site warranty as standard		
Extended warranties and SLA's available at an additional cost		





32inch Firebolt Touch Screen with Projected Capacitive Technology

