
Promultis Clearview

The Promultis Clearview is a Full HD, OLED, Transparent Touchscreen with 10 Projected Capacitive Touch Points





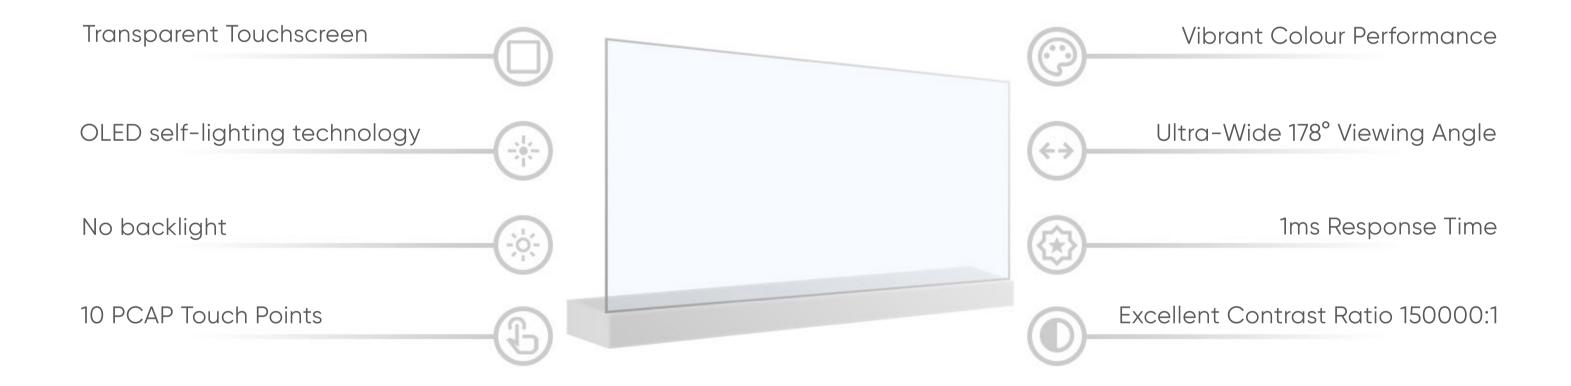

| SCREEN | | |
|-------------------------|----------------------------------|--|
| Display Size | 55" | |
| Screen Panel | T-OLED | |
| Resolution | 1920 x 1080 | |
| Ratio | 16:9 | |
| Luminance | 200 - 600cd m² autoregulation | |
| Contrast Ratio | 150000:1 | |
| View Angle | 178 ° / 178 ° | |
| Response Time | 1ms (Grey to Grey) | |
| Colour Depth | 10bit (R), 1.07 Billion Colours | |
| INTERFACE CONFIGURATION | | |
| Enter the Interface | USB *1 + HDMI I *2 + RS232 IN *1 | |
| Touch | 10 Point PCAP Touch | |
| Output Interface | RS232 OUT *1 | |
| POWER PARAMETERS | | |
| Power Input | AC100 - 240V | |
| Power Consumption | <200W | |
| WORKING ENVIRONMENT | | |
| Performance Period | 7*12h | |
| Lifespan | 30000h | |
| Working Temperature | 0°C~40°C | |





| Humidity | 20% ~ 80% | |
|--------------------|--|--|
| STRUCTURE | | |
| Material | Aluminium Profile + Tempered Glass + Sheet Metal | |
| Outline Dimension | 1225.5 x 782.4 x 200 (mm) | |
| Package | 1344.5 x 889.5 x 380 (mm) | |
| Install | Foot - Mounting | |
| Net Weight / Gross | 34KG / 50KG | |





