



[promultis]

Lucient Outdoor Totem

2500 - 4000 NITS

TEMPERED GLASS

CLASS III LIGHTNING PROTECTION (55")

HDMI CONNECTIVITY



IP66 RATING

SOLID STATE - VIRTUALLY SERVICELESS

NO FANS


ANTI GRAFFITI FINISH (55")

	49"	55"
PANEL		
Active Display Area	1075 x 605	1211 x 682
Resolution	1920 x 1080	1920 x 1080
Brightness	4000 Nits	2500 Nits
Aspect Ratio	16:9	16:9
Backlight Adjustment	Automatic (Ambient Light Sensor)	Automatic (Ambient Light Sensor)
Viewing Angle	178 ° / 178 °	178 ° / 178 °
Backlight Configuration	Direct LED	Direct LED
Operation Life Cycle (hours)	50,000	50,000
MECHANICAL		
Dimensions (W x H x D)	700 x 1950 x 160 mm	777 x 2000 x 160
Net Weight	TBD	TBD
Enclosure Material	Aluminium	Stainless Steel & Aluminium
Finishing	Zinc Powder Coating + Fine Grain Powder Coating	Zinc Powder Coating + Fine Grain Powder Coating - Anti Graffiti
Colour	Black (Ral 9005)	Black (Ral 9005)
Glass	Tempered Glass	AR Coated Tempered Glass
MEDIA		
HDMI in	x1	x1
POWER		
AC Input	110 / 220 VAC, 50 to 60 Hz	220 VAC, 50/60 Hz
Power Consumption	245W	310W
Leakage Protection	-	30mA/0.1s
Lightning Protection Grade	-	CLASS III
ENVIRONMENTAL		
IP Rating	IP66	IP66
Operating Environment	Fully Outdoor	Fully Outdoor
Operating Temperature	-20 ° C ~ 45 ° C	-20 ° C ~ 50 ° C (Outdoor Direct Sunlight 850W/m ²)
Operating Humidity	5% ~ 98%	5% ~ 98%
Operating Altitude	≤2000m	≤2000m



[promultis]

Lucient Outdoor Totem (49")

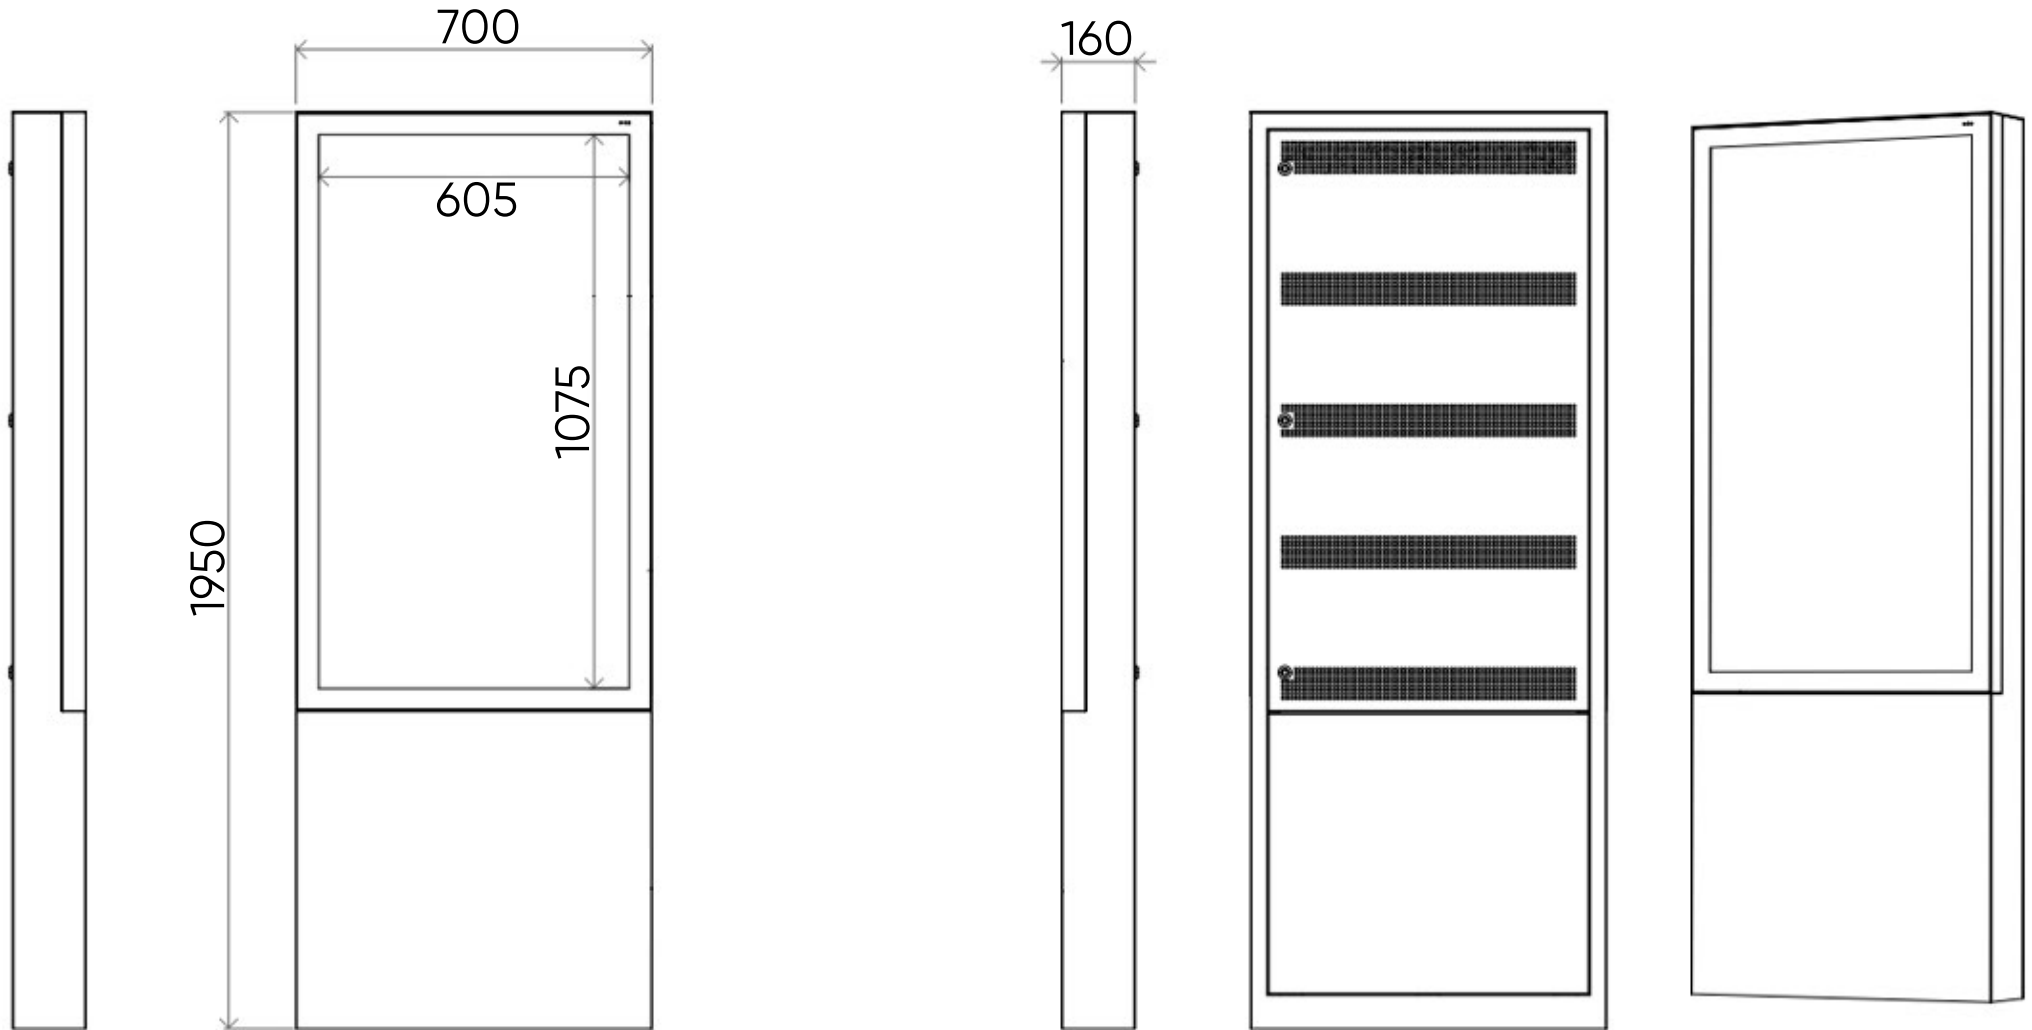



[promultis]

Lucient Outdoor Totem (55")

