




[promultis]

Promultis P2.5 LED Poster Screen

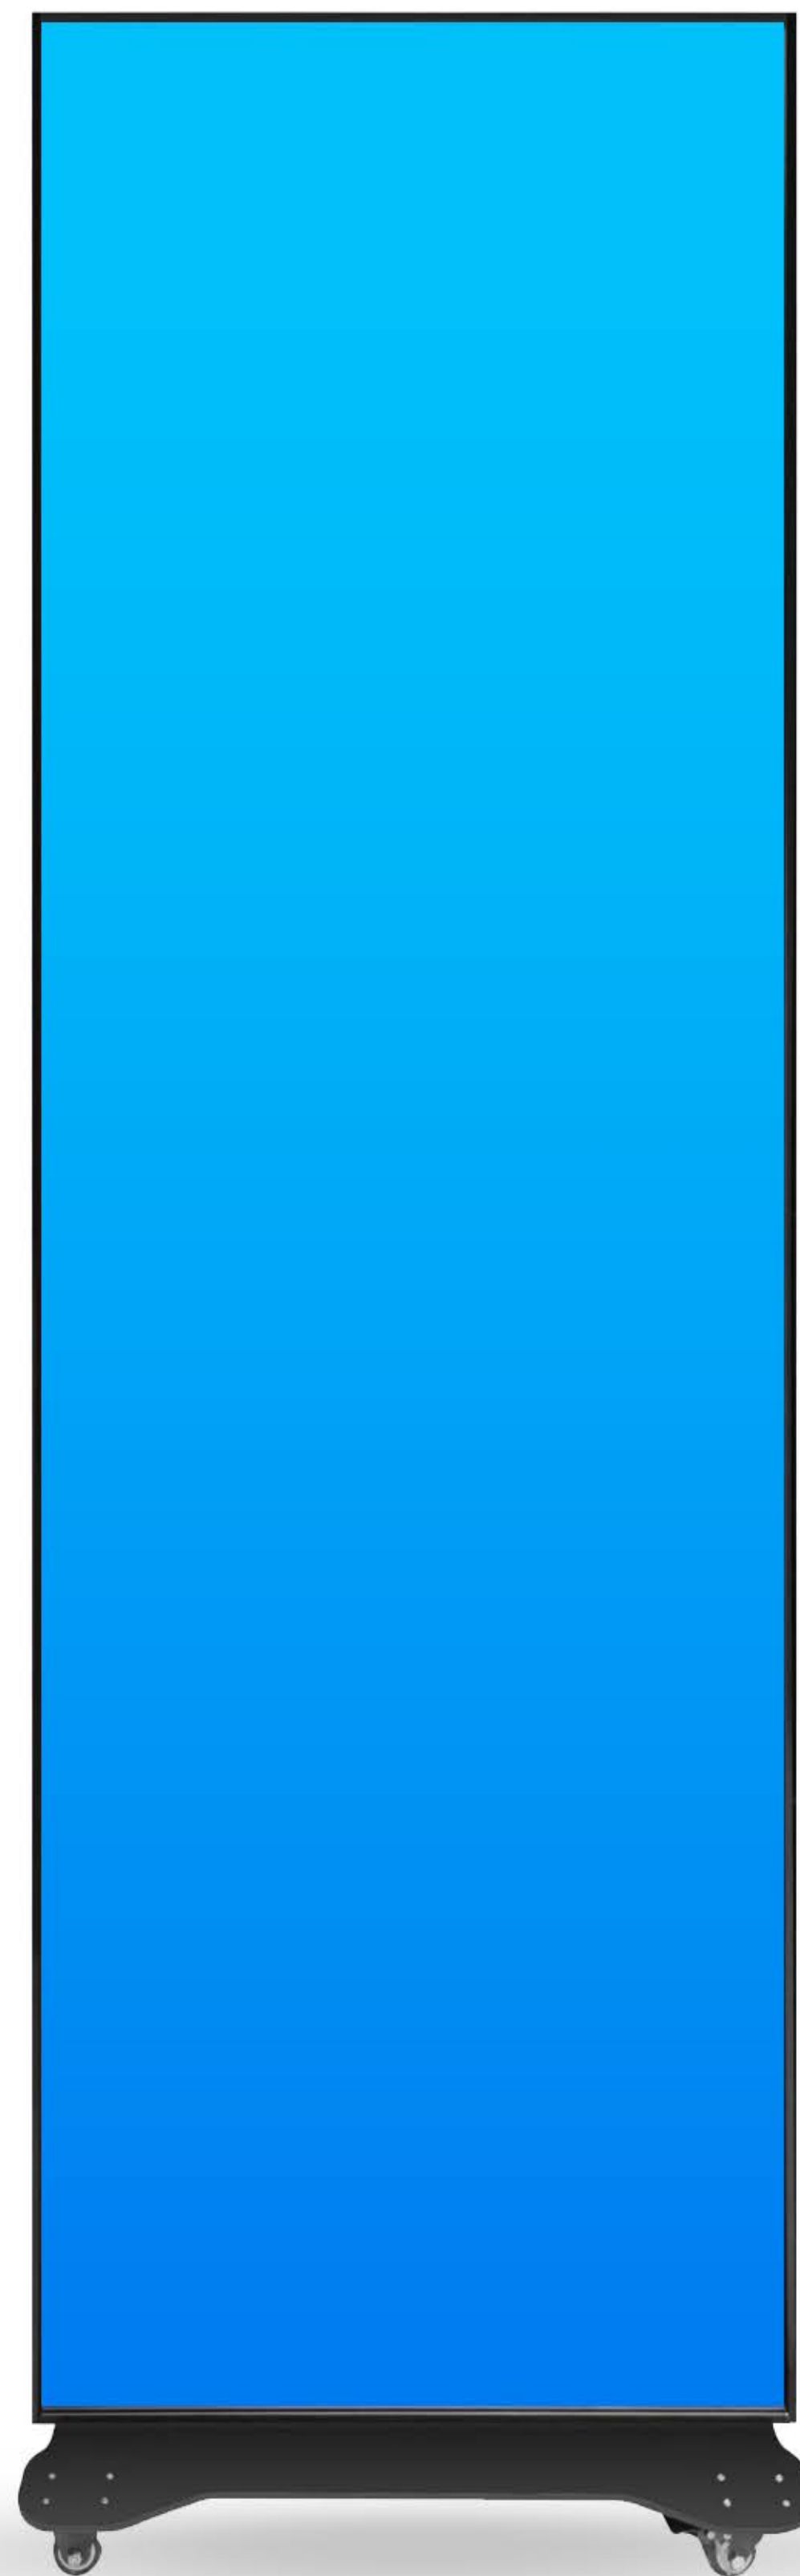

LED	Pixel Pitch	2.5mm	
	Pixel configuration	1RGB	
	LED type	SMD1515	
LED CABINET	Pixel Pitch	2.5mm	
	Pixels per sqm	160,000 pixels	
	LEDs qty. per sqm.	160,000 pcs	
	LED module resolution	128 x 64	
	LED module size	320mm x 160mm	
	LED cabinet resolution	256 x 192 pixels	
	Brightness	600-900cd/sqm	
	Viewing angle	140° H/120° V	
	Display refresh rate	>1920Hz	
	Scan mode	1/32 scan	
	POWER SUPPLY	Power consumption (max.)	600 watts/sqm
		Power consumption (average)	200 watts/sqm
Input voltage		AC 110 or 220 V \pm 10%	
MECHANICAL DESIGN	LED cabinet weight	42KG	
	Material	Aluminium	
	Ingress protection	IP45	
	Serviceability	Front service	
OPERATION	Storage environment	Temperature: -40°C~60°C Humidity: 10% ~ 85% RH	
	Operating environment	Temperature: -20°C~50°C Humidity: 10% ~ 90% RH	
	Lifespan (typical)	\geq 100,000 hours	
	MTBF	\geq 10,000 hours	
	Source compatibility	CVBS, YC, YUV, RGB, DVI, SDI, HD-SDI, HDMI	



[promultis]

Promultis P2.5 LED Poster Screen

