

Promultis Totem Engage

The Promultis Totem Engage is a 55", PCAP Touch Totem with 10 Touch Points, as well as integrated Android 13 OS.


55" PCAP Touch Screen





Android 13 OS




HDMI, USB & More Connectivity



4K Ultra High-Definition Display



>60,000 Hour Lifespan



Excellent 3000:1 Contrast Ratio



Optional i7 OPS PC



Wide 178°/178° Viewing Angles

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

SPECIFICATIONS	
Panel size	55" TFT-LCD
Display area(mm)/mode	1209(W)x680(H) 16:9
Maximum resolution	3840x2160
Display color	16.7M
Pixel Pitch(mm)	0.43(H)x0.43(V)
Brightness (nits)	450cd/M ²
Contrast	3000:1
Visual angle	178°/178°
Response time	5ms
Weight	50kg (Slim Back), 57kg (Standard Back)
INPUT & OUTPUT	
HDMI	2
USB	2
RS232	1
RJ45	1
Touch output	1
Earphone	1
Speaker	2 X 5W (9 OHM)
VIDEO	
Color system	PAL/NTSC/SECAM

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤180W
Standby power consumption	<5W
TEMPERATURE	
Working temperature	0 ° C ~ 50 ° C
Storage temperature	-20 ° C ~ 60 ° C
Working humidity	85%
Storage humidity	85%
ANDRIOD SPECIFICATIONS	
Andriod system	Google Android 13 support multi-language
Storage	4G DDR3
CPU	Dual core 1.8 Ghz/quad-core 982
Flash	32G
APPEARANCE	
Color/appearance	White,black,customized
Case	Metal case SPCC
Installation	Floor standing
Quality Standard	CE,CCC
TOUCH PANEL	
Specification	Capacitive touch

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

Positioning accuracy	±2mms
Transmittance	≥92%
Hardness	7H
Click manner	10 points touch
Response time	≤10ms
Life time	More than 600 million times
DETAILED FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P/2160P

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.




[promultis]



For more exciting multitouch products visit
www.promultis.info
 or call +44 (0) 239 251 2794

Slim Back Engage

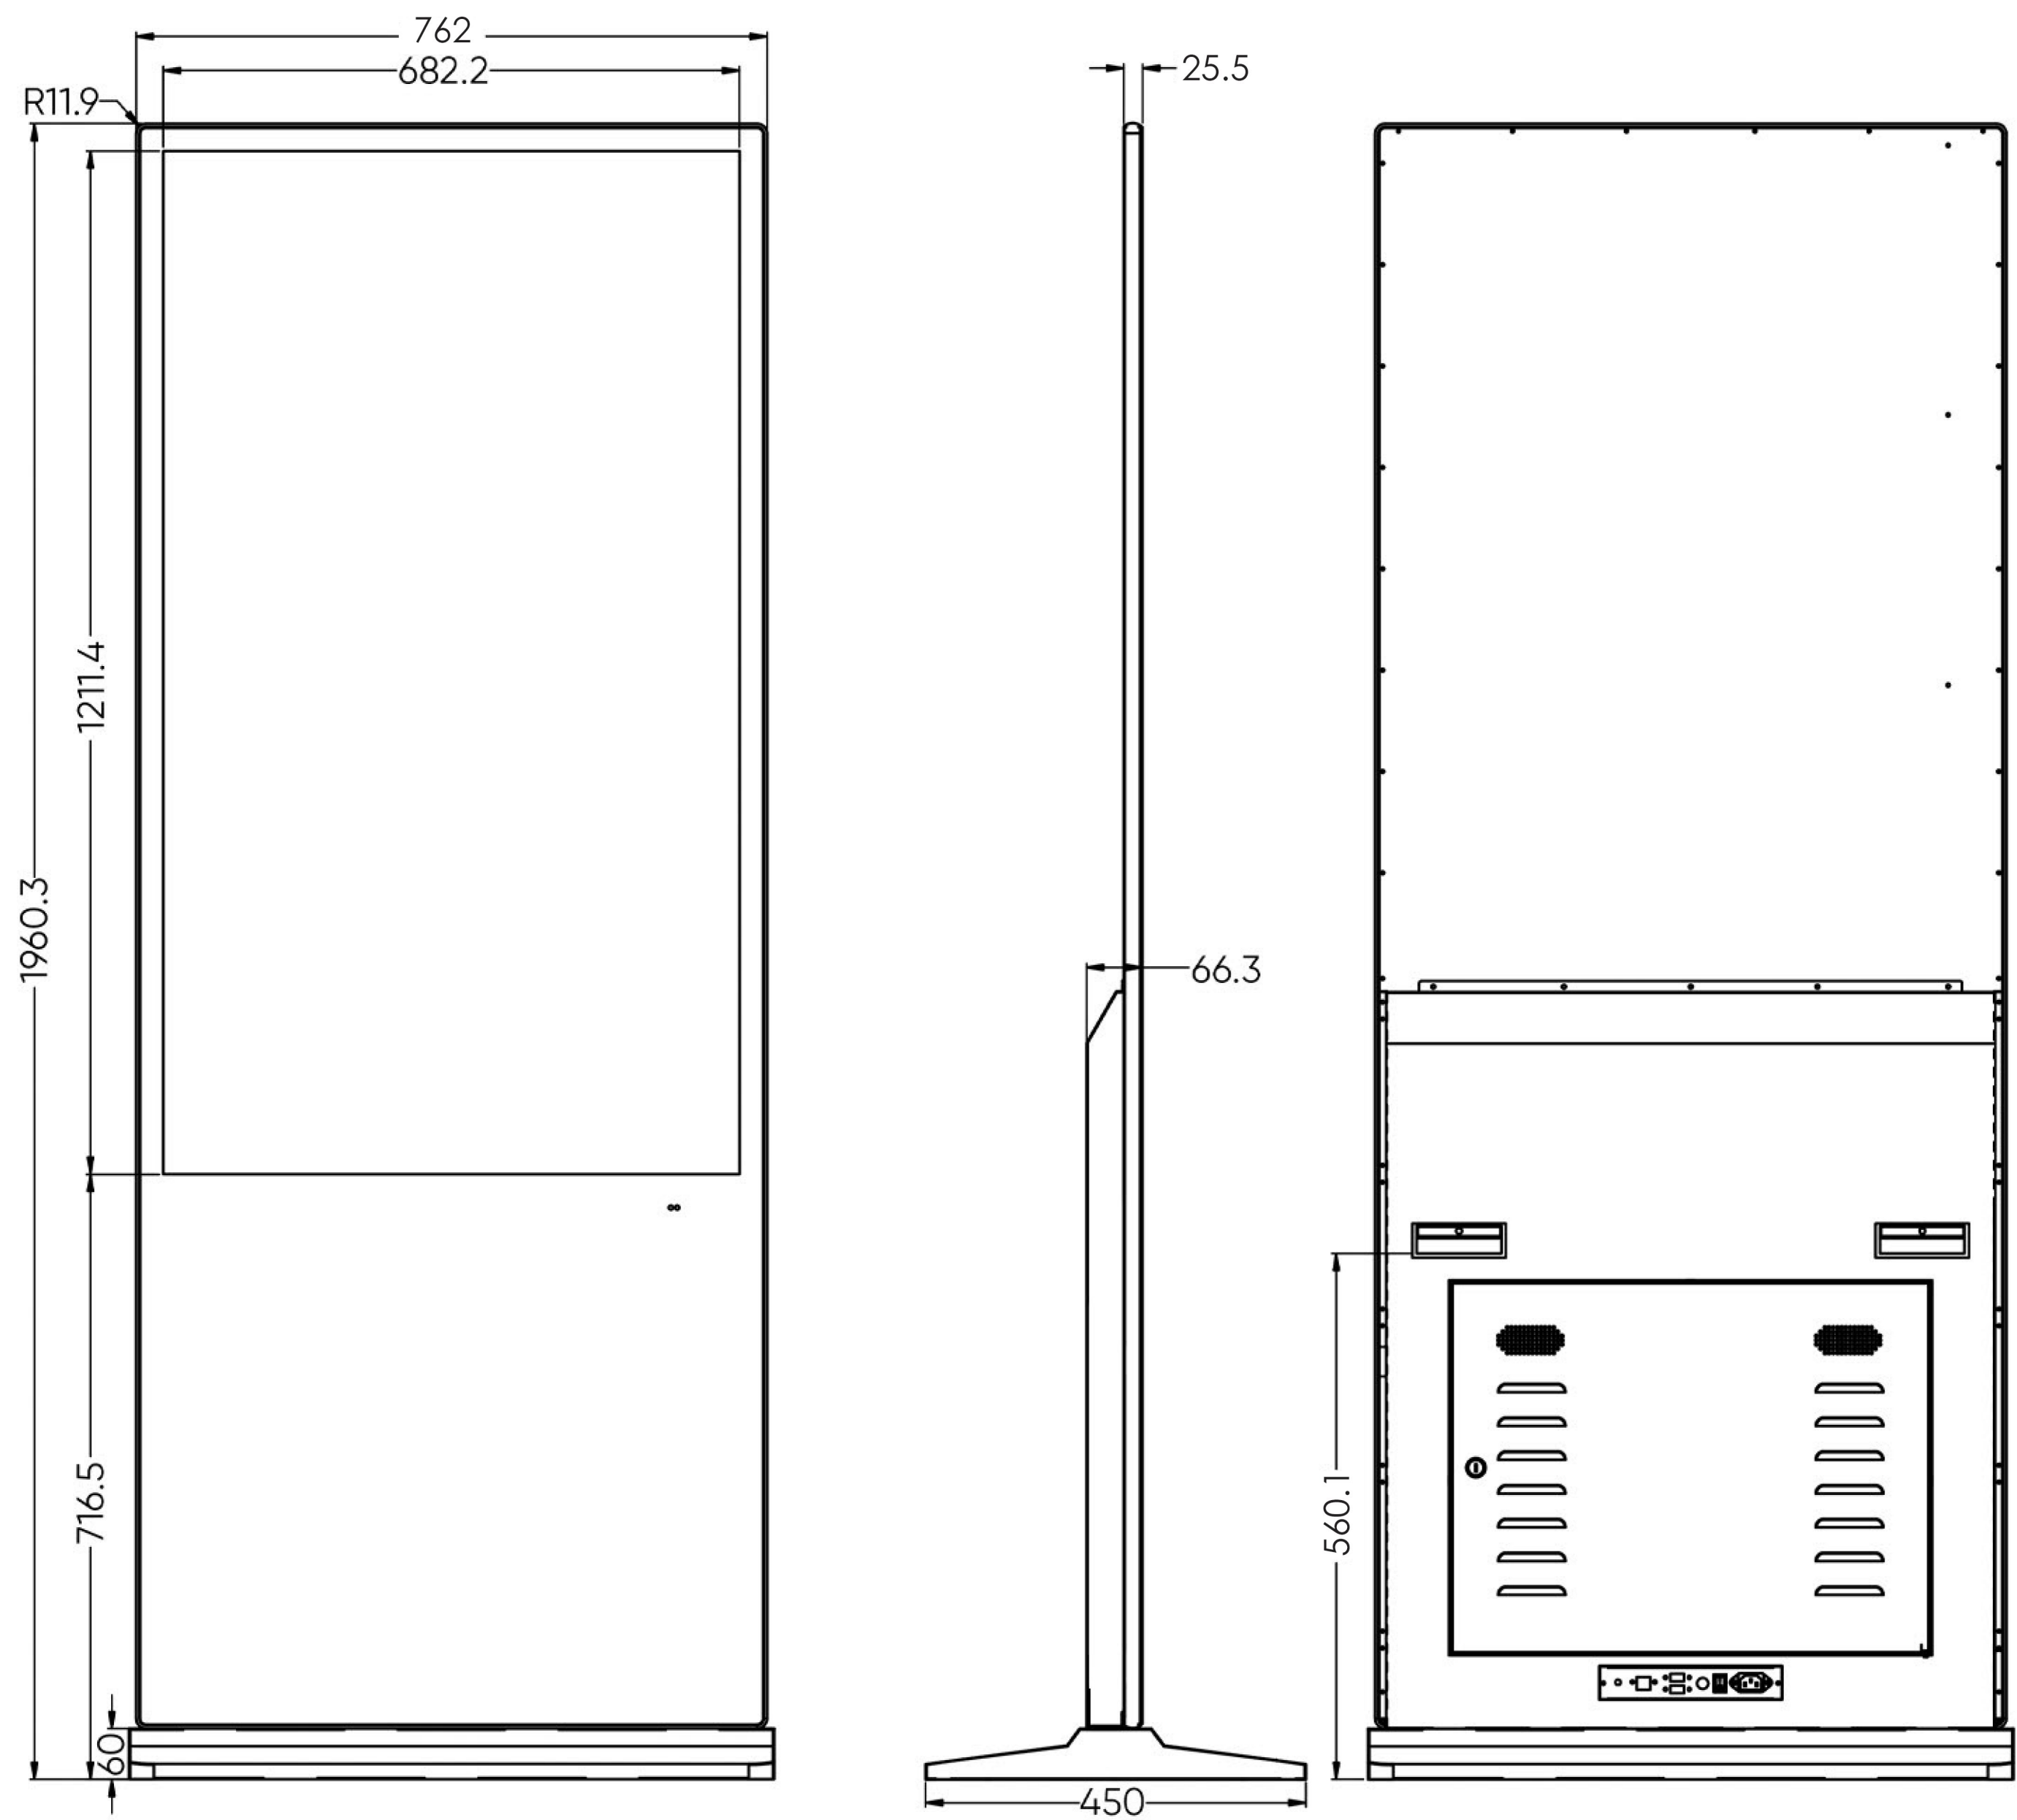

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.




[promultis]



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

Standard Back Engage

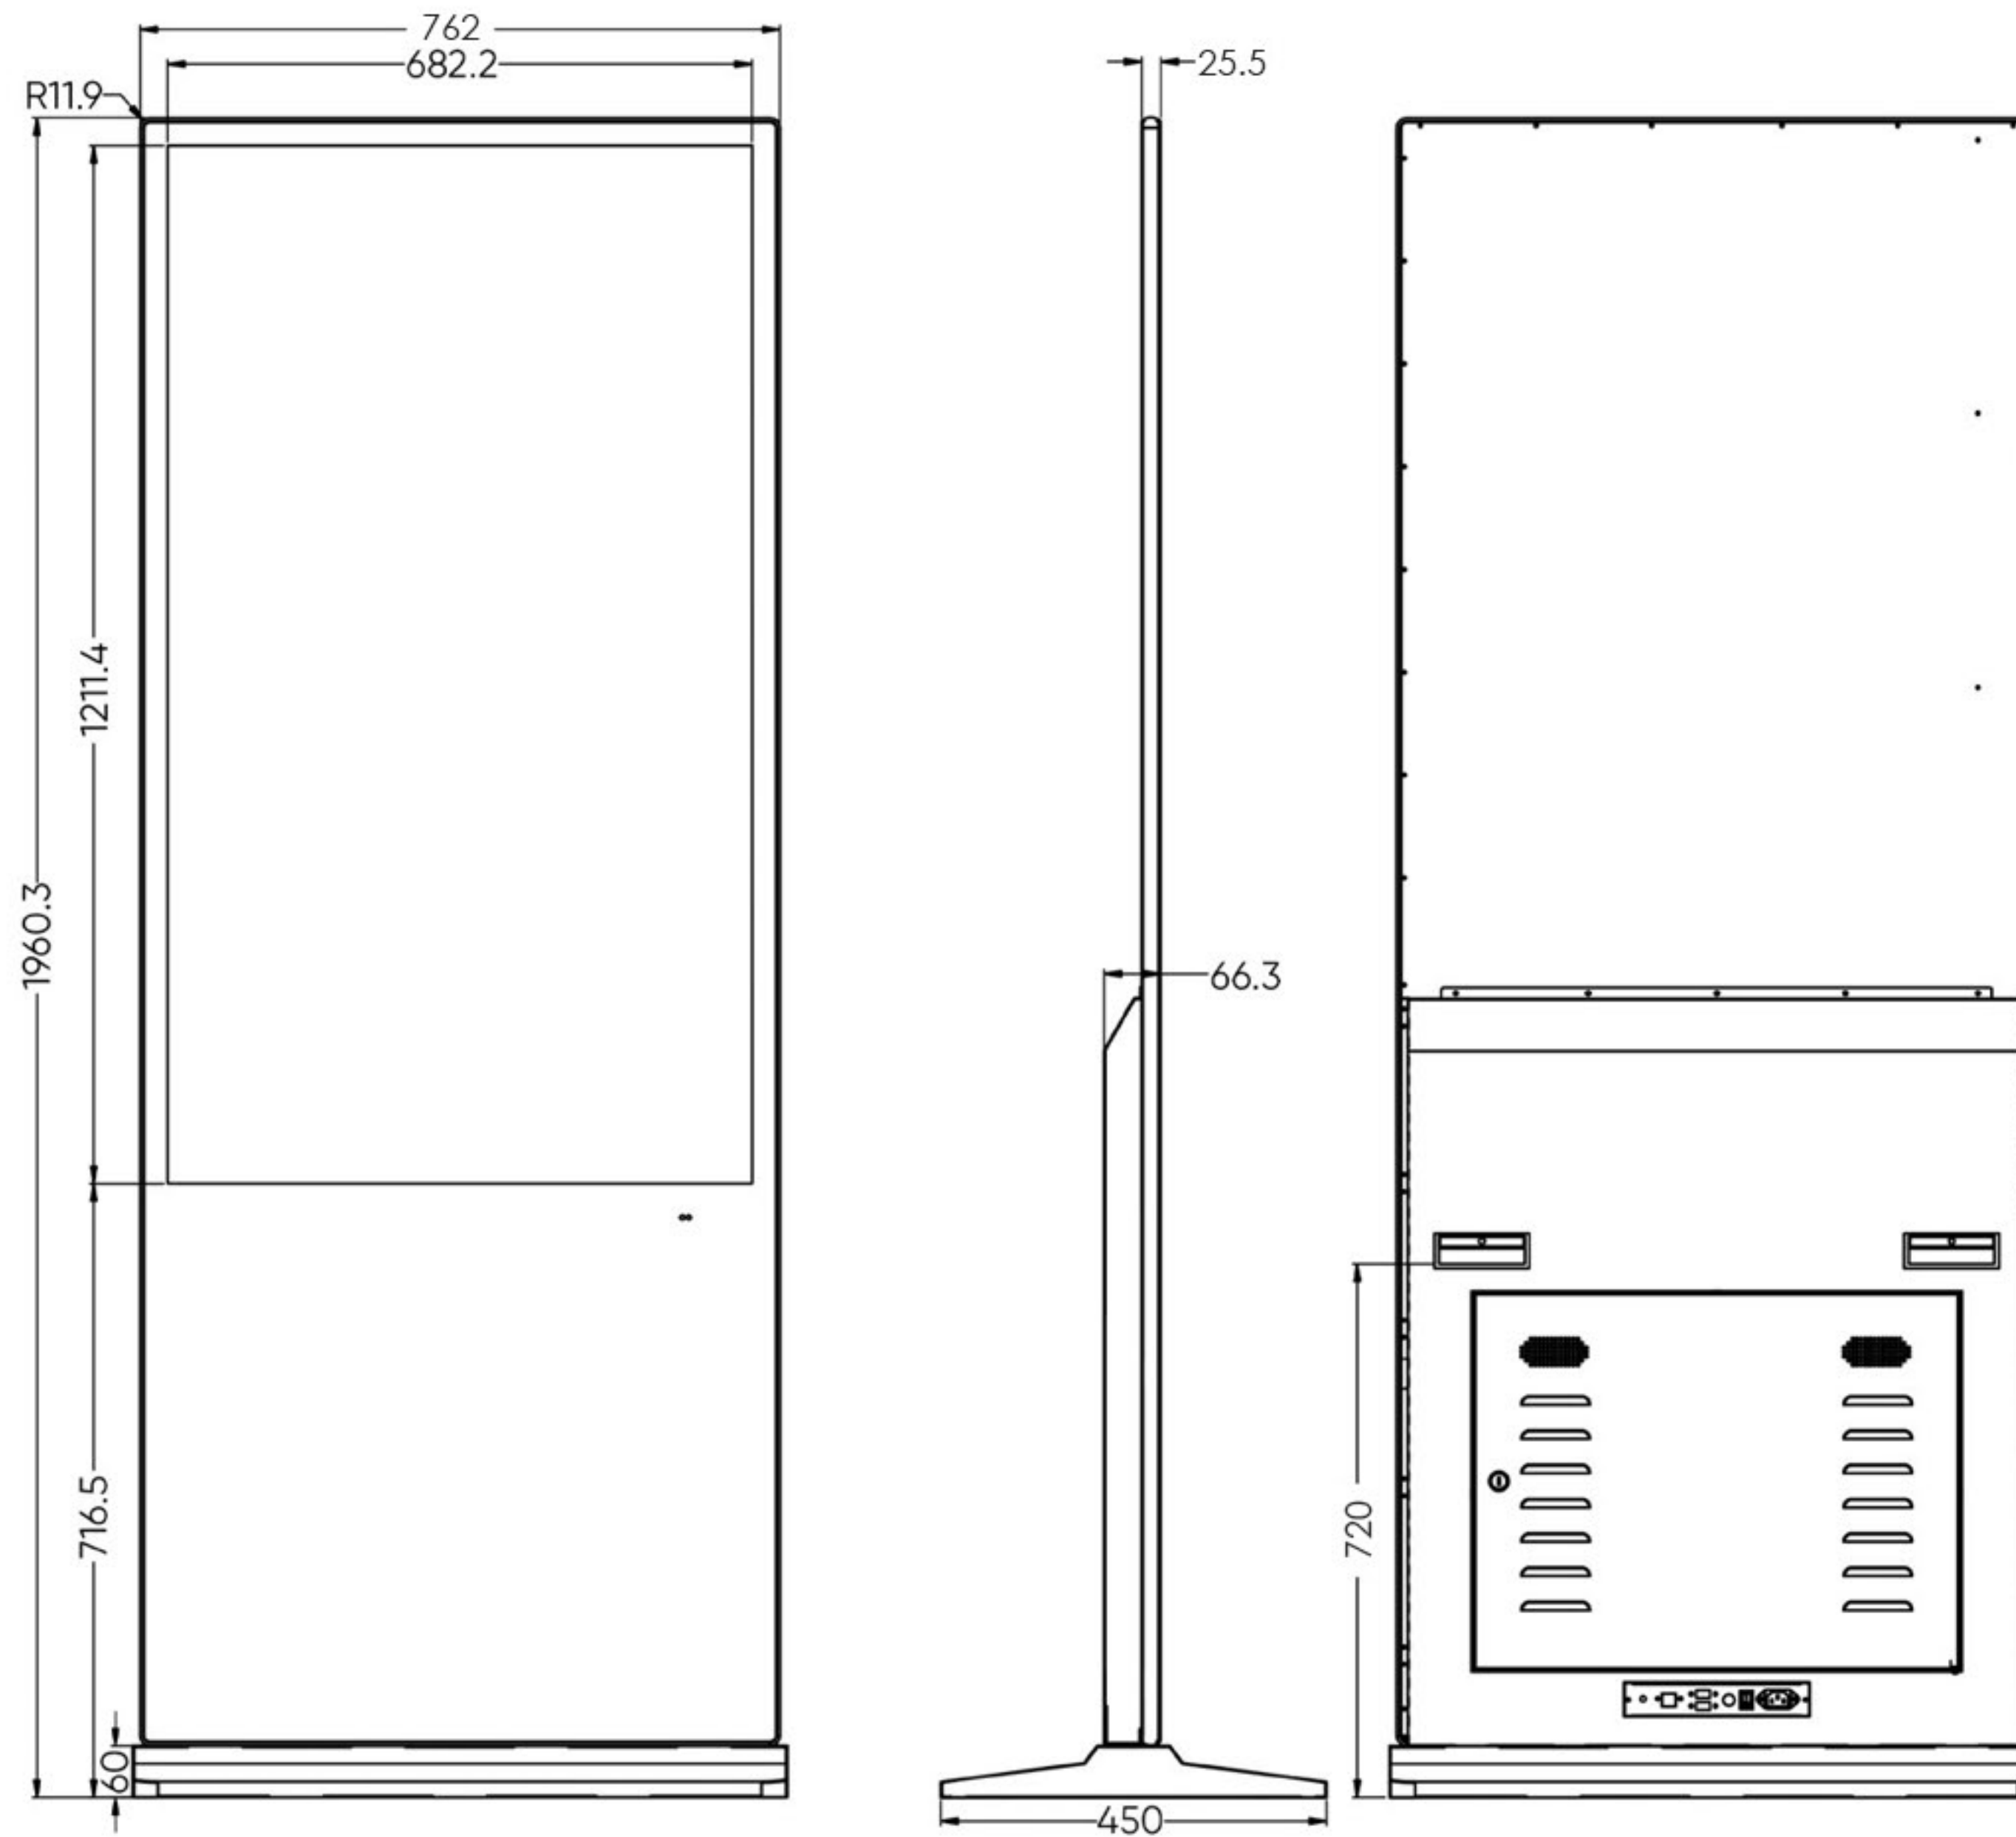

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.




[promultis]



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

65" Engage

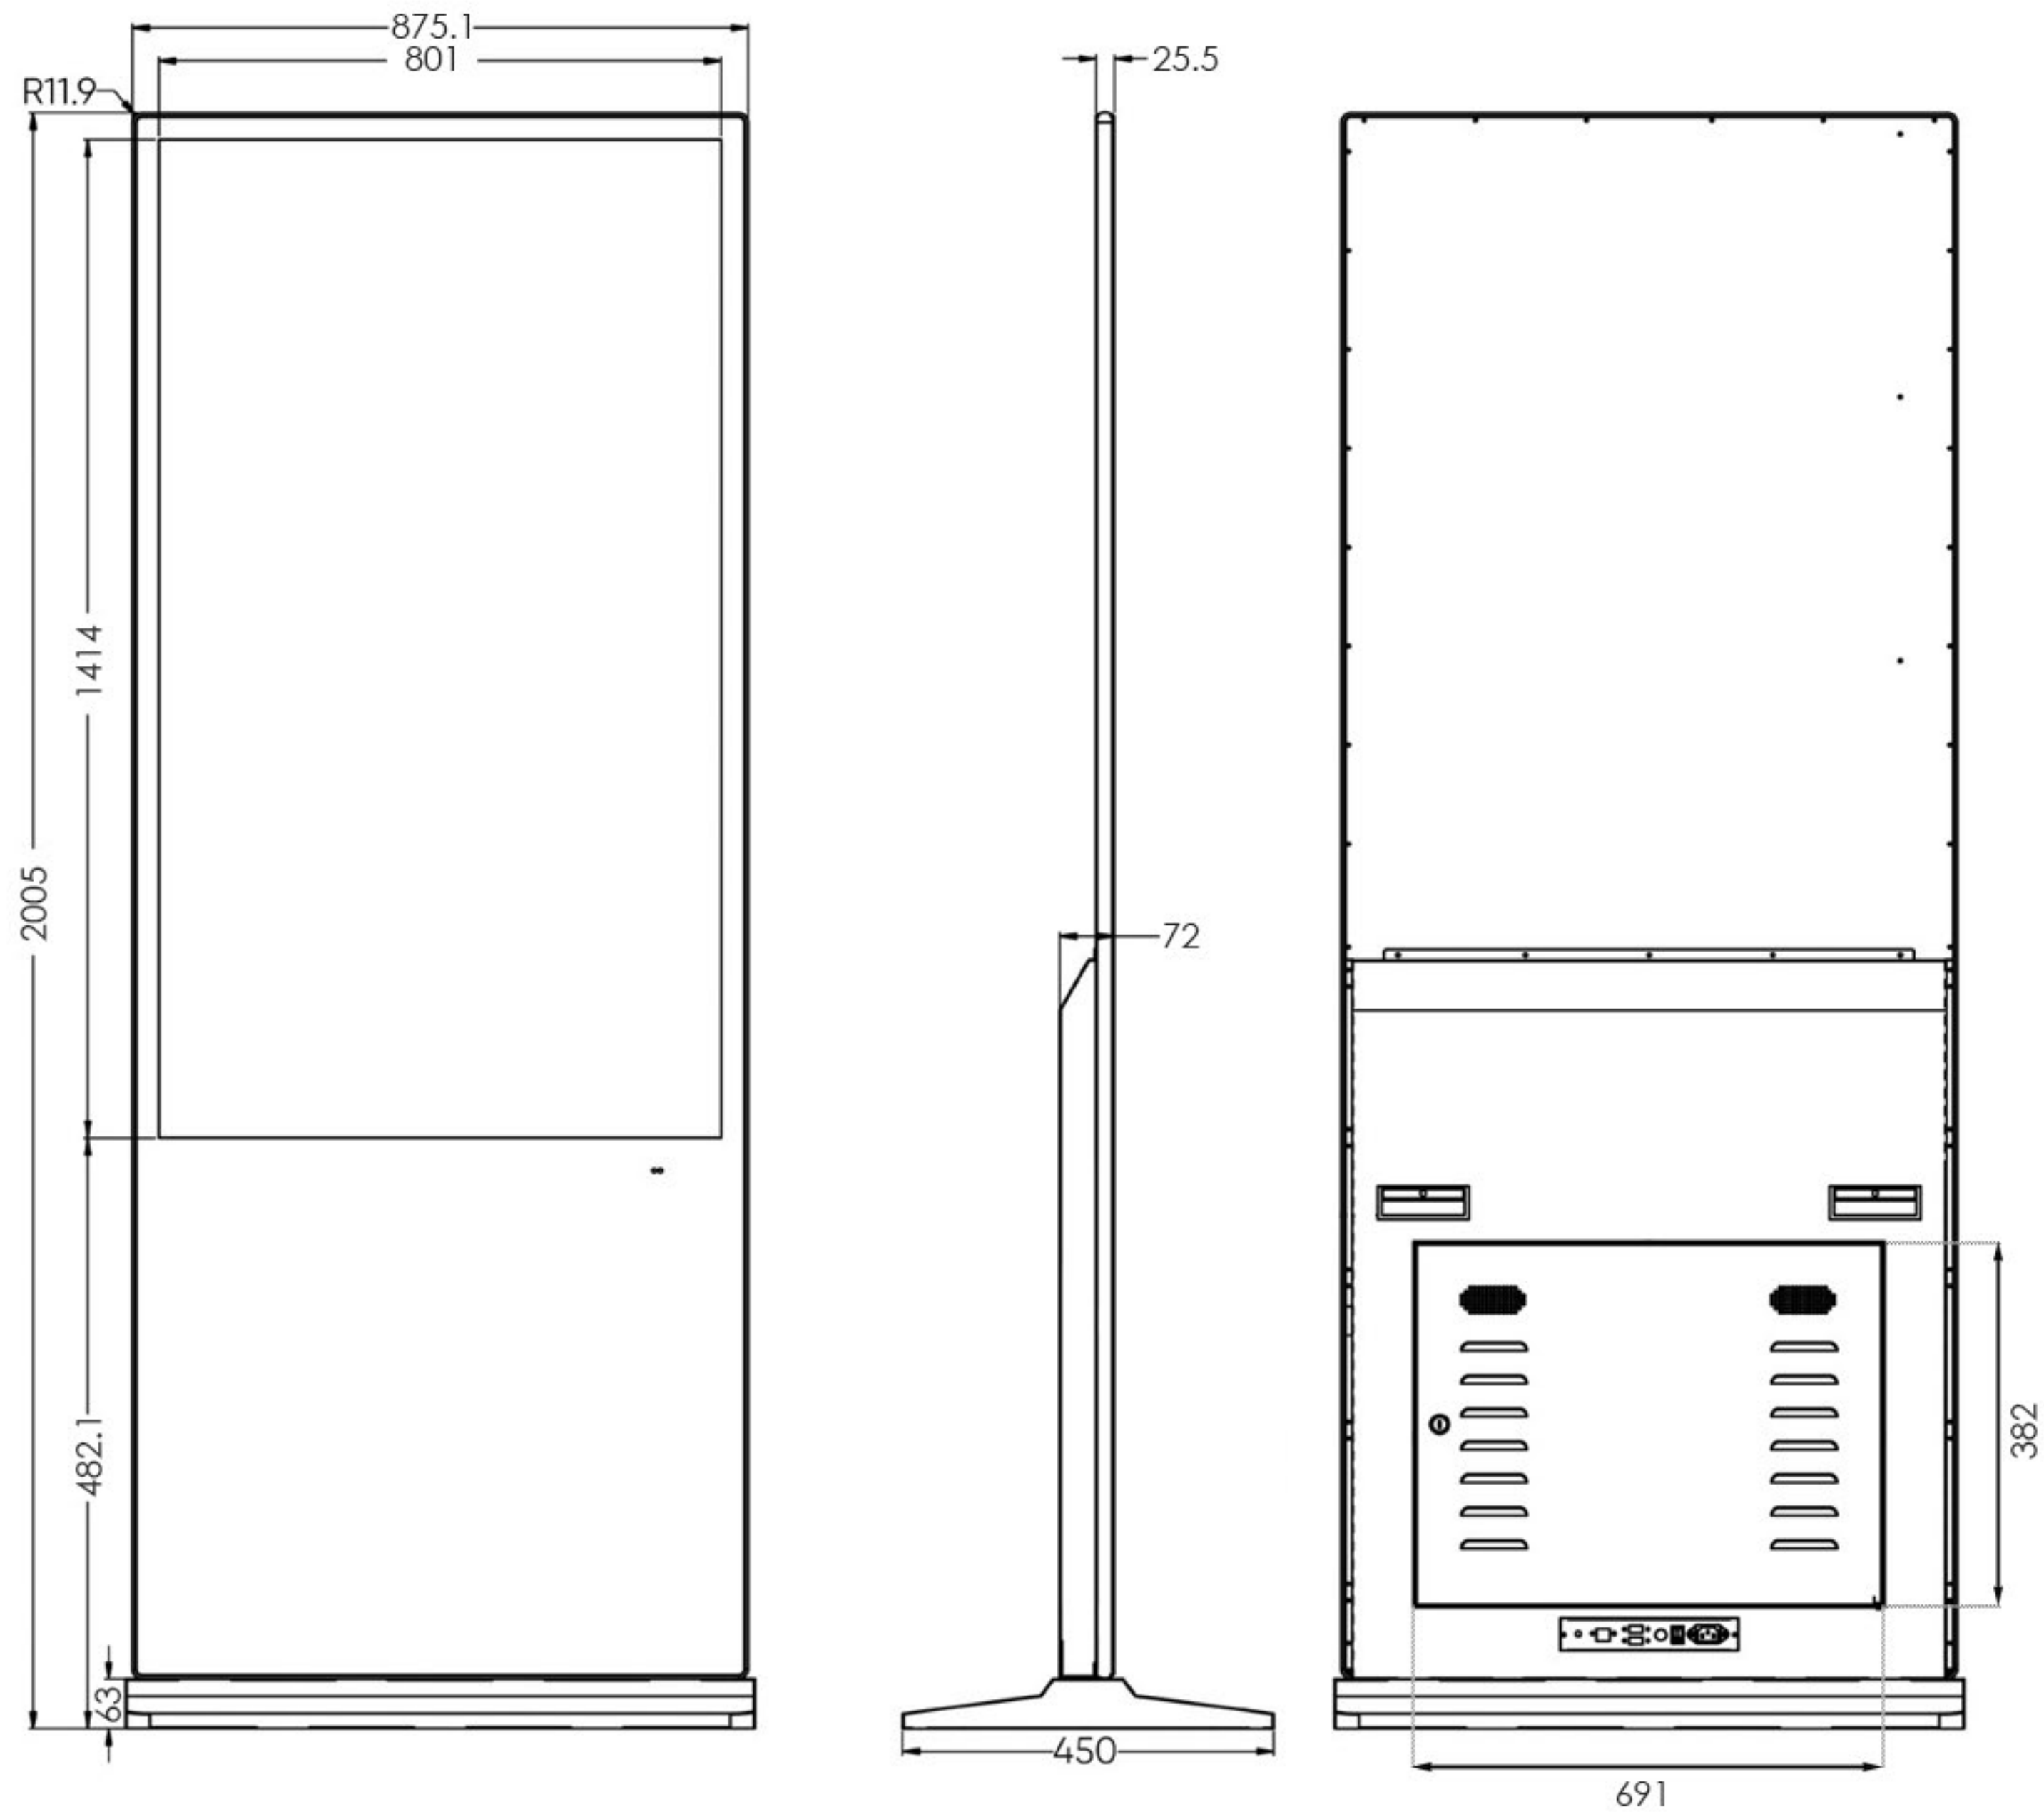

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown. Please call us for the most up to date specifications and dimensions.



[promultis]



For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794