



[promultis]

# Contour Kiosk

Engage your audience with this dynamic, curved, Contour Kiosk. Ideal for digital signage and wayfinding solutions.



27" TO 55" INTERACTIVE AREA



20, 40 & 100 TOUCH POINTS WITH PROJECTED CAPACITIVE TECHNOLOGY



EXTERNAL USB PORTS



OPTIONAL i5 or i7 PC



HDMI, VGA AND USB CONNECTIVITY



HD UHD, BACK-LIT LED SCREEN



TEMPERED GLASS



ANTI-BACTERIAL FILM OPTION  
Currently being tested for COVID-19



SECURE PC COMPARTMENT AND CABLE MANAGEMENT



1 YEAR ON-SITE WARRANTY



[promultis]  
MULTITOUCH SOLUTIONS



Made in Britain

For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
or call +44 (0) 239 251 2794





CHASSIS FEATURES	
Materials	Aluminium
Glass type	Toughened
PANEL	
Interactive area	27"   43"   55"
Panel resolution	1080p Full HD or 4K UHD
Native resolution	1920 x 1080 or 3840 x 2160 60Hz
Brightness (nits)	450
Contrast ratio	1500 to 1
Response time	6ms
Aspect ratio	16x9
Viewing angle	178° / 178°
Pixel pitch	0.744 (mm)
LCD Illumination	Backlit LED
Speaker	10W x2
ENVIRONMENT	
Operating temperature	50°F to 104°F (10°C to 40°C)
Operating Humidity	10% to 80%, non-condensing
Storage Temperature	-4°F to 113°F (-20°C to 45°C)
Storage Humidity	5% to 95%, non-condensing
SHIPPED WITH	
Cables	Power   USB   HDMI
Remote control	Included
User manual	Included
WARRANTY	
3 year repair or replace warranty as standard	

PROJECTED CAPACITIVE	
Detection method	Projected Capacitive
Input method	Finger and gloved finger
Number of simultaneous touches	20, 40 or 100 touches
Noise Shielding	DISPLAX XTR-Shield™ Plus, a proprietary noise filtering technology
Aspect ratio	16:9
Controller	Printed circuit board with mini USB connector
Adhesive	Permanent
Interface	HID
OS with multitouch	Windows 8.1, 8, 7, 10; Ubuntu 12.04; Android; Chrome OS
OS with single touch	Mac OS X Yosemite
OS with mouse emulation	Spinetix Media Player HMP 200
Data connectivity	USB 2.0
Touch accuracy	1mm absolute
PERFORMANCE	
Substrate thickness	Up to 6mm
Touch response	5 milliseconds
Calibration	Available using control panel: no drift
POWER CONSUMPTION	
Average power consumption (P)	USB powered @ 5V
	Peak consumption: 410 mA
	Operation consumption: 370mA
RELIABILITY	
Operating temperature range	-20°C to 70°C
Operating humidity range	0% to 96%
Life time expectancy	Unlimited
Controller life time expectancy	1 million hours



**[promultis]**

# Contour Kiosk with 55" Screen

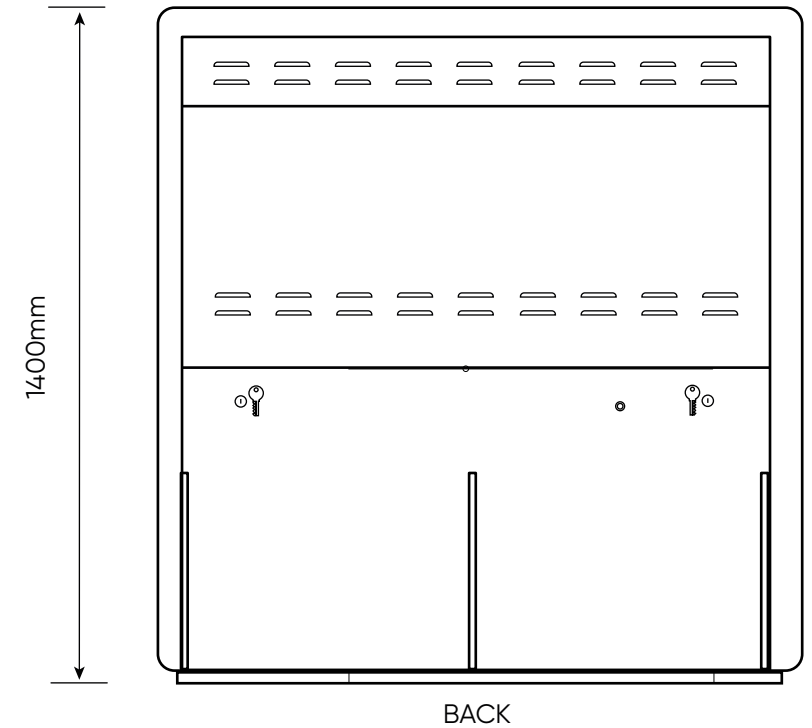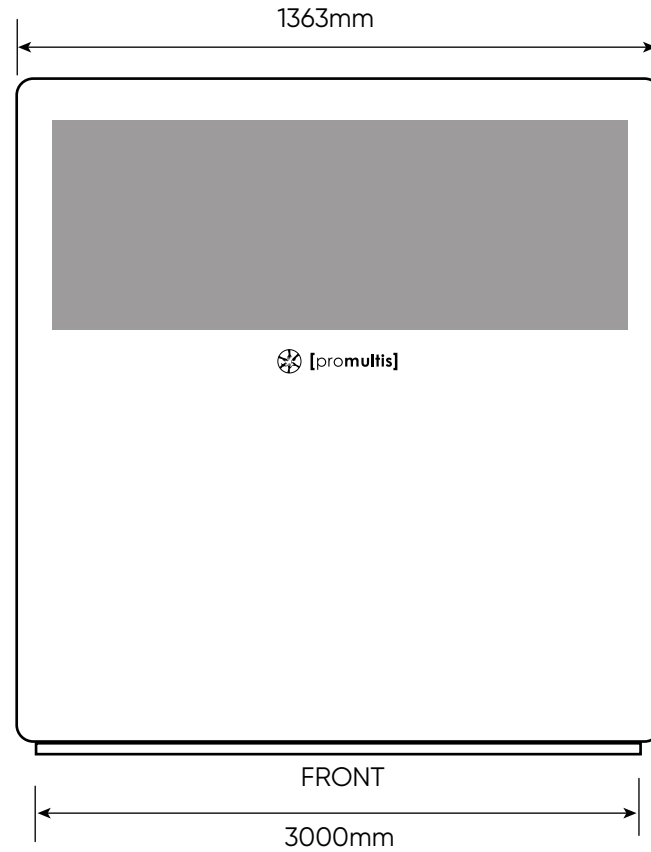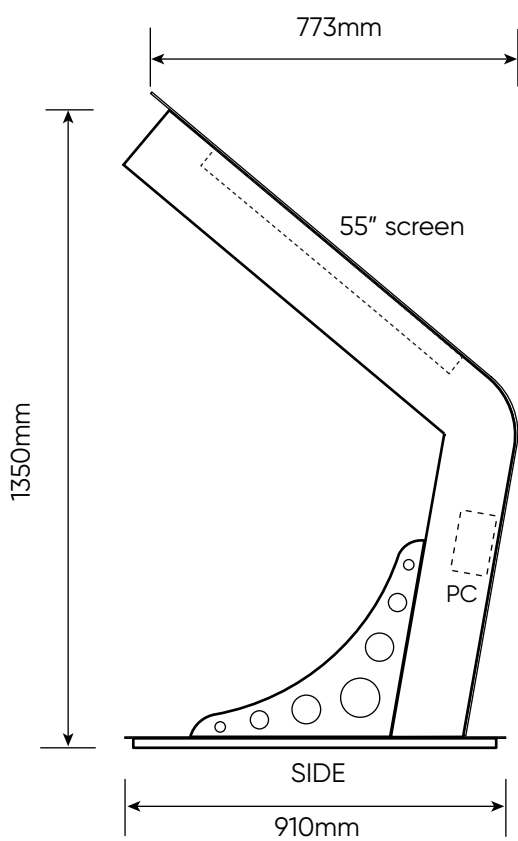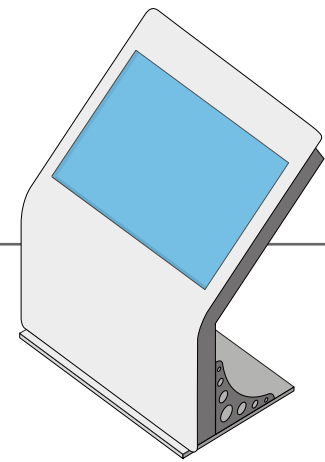

**[promultis]**  
MULTITOUCH SOLUTIONS




Made in Britain

For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
or call +44 (0) 239 251 2794



[promultis]

# Contour Kiosk with 32" Screen

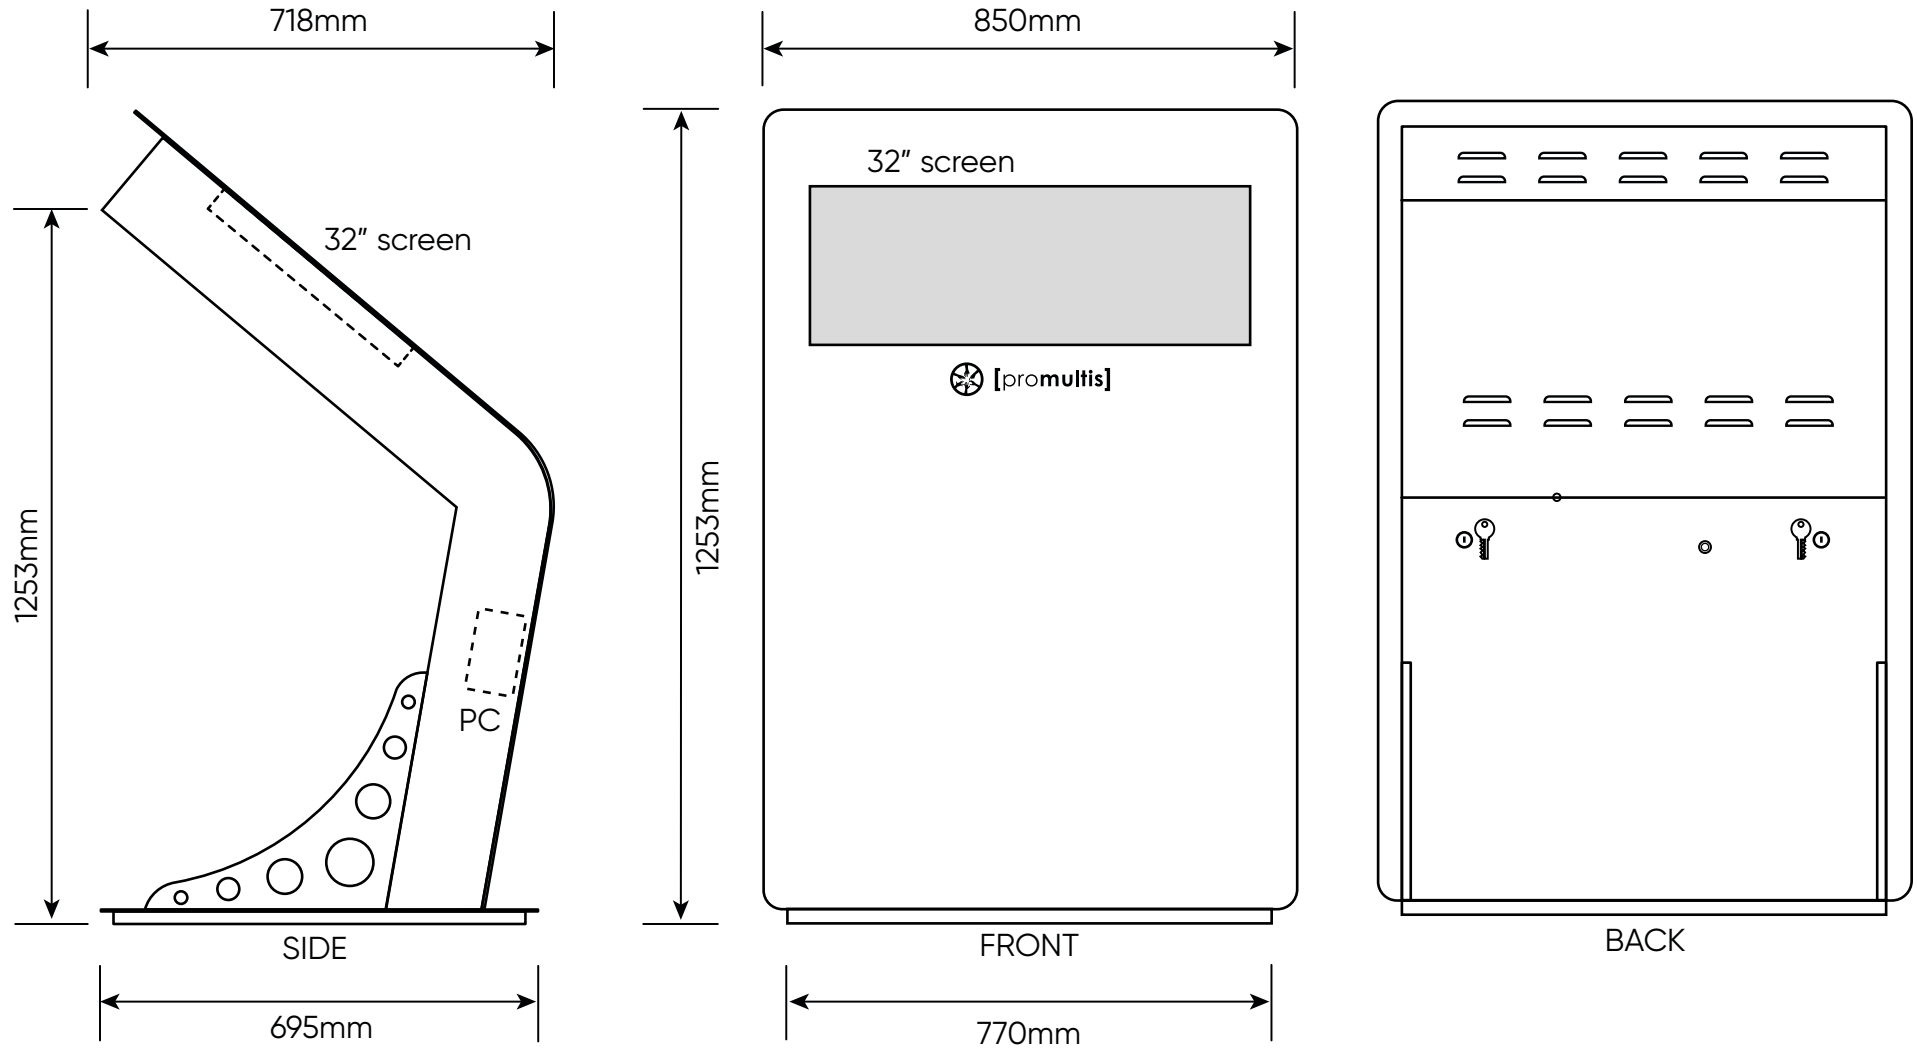

[promultis]  
MULTITOUCH SOLUTIONS



Made in Britain

For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
or call +44 (0) 239 251 2794



[promultis]

# Contour Kiosk with 27" Screen

