



[promultis]

Standard Kiosk

Create an inviting and imersive information point with the Promultis Standard Kiosk. Ideal for digital signage and wayfinding solutions.



43" TO 65" SCREENS AVAILABLE



100 TOUCH POINTS WITH
PROJECTED CAPACITIVE
TECHNOLOGY



32 TOUCH POINTS
WITH INFRARED



OPTIONAL i5 or i7 PC



HDMI AND USB CONNECTIVITY



1080p HD OR 4K UHD
BACK-LIT LED SCREEN



TEMPERED GLASS



SECURE PC COMPARTMENT
AND CABLE MANAGMENT



3 YEAR ON-SITE WARRANTY



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

The Promultis standard kiosk has been designed for indoor use and is an ideal way to engage your audience with content that can inform, attract, entertain and educate.

The Promultis Kiosk is available in a variety of configurations that can suit any budget and any situation! Constructed with only the highest-grade components, our commercial LED screens are available with 1080p or 4K resolution and up to 800 nit high brightness.

Making the Promultis Kiosk perfect for use in areas with excessive light such as foyers and exhibition halls. You have the option of 43", 55" or 65" screens and also a choice between the very latest infra-red technology which allows up to 32 touches or projected capacitive touch technology which allows for 100 touch points.

The Promultis has a discreet, lockable cabinet with two shelves to house a PC and effective cable management.

Promultis Standard Kiosk is ideal for

- Retail Environments
- Exhibitions & Events
- Corporate Spaces
- Hospitality
- Transportation
- Entertainment



Projected Capacitive Kiosk for a specialist fit out and finishing contractor visitor centre including Promultis bespoke software featuring a corporate presentation featuring the companies services and case studies.



Promultis developed the software for the display presentation using corporate assets supplied by Mitie. The presentation included an interactive PDF viewer showing each facility and a custom made Snowflake game called Tap Tastic.

The Promultis Standard Kiosk has a very sleek and contemporary appearance, however, sometimes you need something just that little more exclusive. We offer you the additional option to completely customise the housing of the kiosk to reflect your branding or campaign messages.



Complete Hardware & Software Solution from Promultis

Promultis can completely customise the unit with your branding while also providing interactive, touch software and digital signage solutions to meet your presentation and education needs.



Eye catching solution to allow customers to create unique designs for their glo devices. As well as creating the software for the Promultis Kiosk, we also worked on a solution that allows users to print off their designs and apply them to their own glo device.


Promultis Bespoke Interactive Software

Engage with customers through a fully branded, interactive application with multi-user, collaborative interface incorporating your corporate identity, images, literature, audio files, videos, web sites and social media.



Software options

The Snowflake Suite Ultimate is perfect for education and training. It is fully featured with over 52 apps, including presentation, creativity and productivity tools, as well as games. It is intuitive and easy to use and customisable to suit your needs.

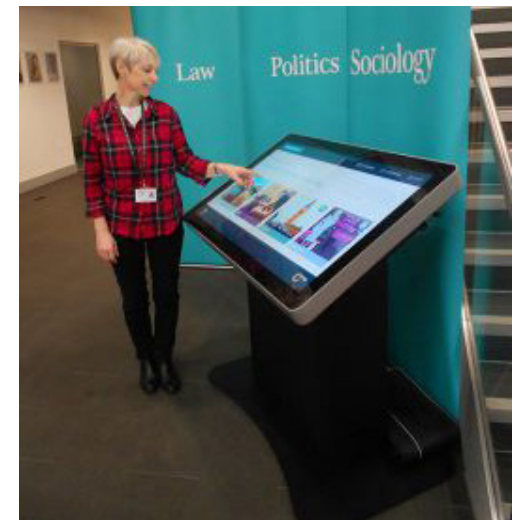

Information portal and way-finding for students and visitors of the University of Sussex with Promultis free-standing kiosk in the foyer.

| CHASSIS FEATURES | |
|---------------------------------------------------------------|-------------------------------|
| Materials | Aluminium & Steel |
| Glass type | Toughened full transmittivity |
| Lockable Storage | Cable Mangement and PC shelf |
| PANEL | |
| Screen Options | 43" 55" 65" |
| Panel resolution | 1080p HD OR 4K UHD |
| Native resolution | 3840 x 2160 60Hz |
| Brightness (nits) | 450 |
| Contrast ratio | 1500 to 1 |
| Response time | 6ms |
| Aspect ratio | 16x9 |
| Viewing angle | 178° / 178° |
| Pixel pitch | 0.744 (mm) |
| LCD Illumination | Backlit LED |
| Speaker | 10W x2 |
| ENVIRONMENT | |
| Operating temperature | 50°F to 104°F (10°C to 40°C) |
| Operating Humidity | 10% to 80%, non-condensing |
| Storage Temperature | -4°F to 113°F (-20°C to 45°C) |
| Storage Humidity | 5% to 95%, non-condensing |
| SHIPPED WITH | |
| Cables | Power USB HDMI |
| Remote control | Included |
| Screen freeze function | On remote control |
| User manual | Included |
| WARRANTY | |
| 3 year repair or replace warranty as standard | |
| Extended warranties and SLA's available at an additional cost | |

| INFRA RED TOUCH | |
|--------------------------------|--------------------------------------------------------------------|
| Touch Points | 10, 16/20 & 32 |
| Touch sensitive to | Finger, Opaque object, Stylus |
| Sunlight Sensitivity | Can be used in direct sunlight |
| Interpolation | 32,768x32,768 |
| Response time | Repeated touch <6ms |
| Drift | None |
| Temperature | -20°C~60°C |
| Accuracy | ±2mm |
| Interface | USB-2 |
| Relative Humidity | 10%~90%RH |
| Supported | OS Windows, MAC, Linux, Android |
| PROJECTED CAPACITIVE | |
| Detection method | Projected Capacitive |
| Input method | Finger and gloved finger |
| Number of simultaneous touches | 100 |
| Noise Shielding | DISPLAX XTR-Shield™ Plus, a proprietary noise filtering technology |
| Aspect ratio | 16:9 |
| Controller | Printed circuit board with mini USB connector |
| Adhesive | Permanent |
| Interface | HID |
| OS with multi-touch | Windows 8.1, 8, 7*: Ubuntu 12.04**; Android**; Chrome OS*** |
| OS with single touch | Mac OS X Yosemite |
| OS with mouse emulation | Spinetix Media Player HMP 200 |


* Home Premium SP1; Professional SP1 Ultimate x64 SP1 ** Depending on kernel and multi-touch support. *** 39.0.2171.85(64 bit)

| Data connectivity | USB 2.0 |
|---------------------------------|----------------------------------------------------------|
| Touch accuracy | 1mm absolute |
| Sensor weight | 260 g |
| Controller weight | 60 g |
| PERFORMANCE | |
| Substrate thickness | Up to 6mm |
| Touch response | 5 milliseconds |
| Calibration | Available using control panel: no drift |
| POWER CONSUMPTION | |
| Average power consumption (P) | USB powered @ 5V |
| | Peak consumption: 410 mA Operation consumption: 370mA |
| RELIABILITY | |
| Operating temperature range | -20°C to 70°C |
| Operating humidity range | 0% to 96% |
| Life time expectancy | Unlimited |
| Controller life time expectancy | 1 million hours |



[promultis]

Standard Kiosk with 65" Boxtop touch screen

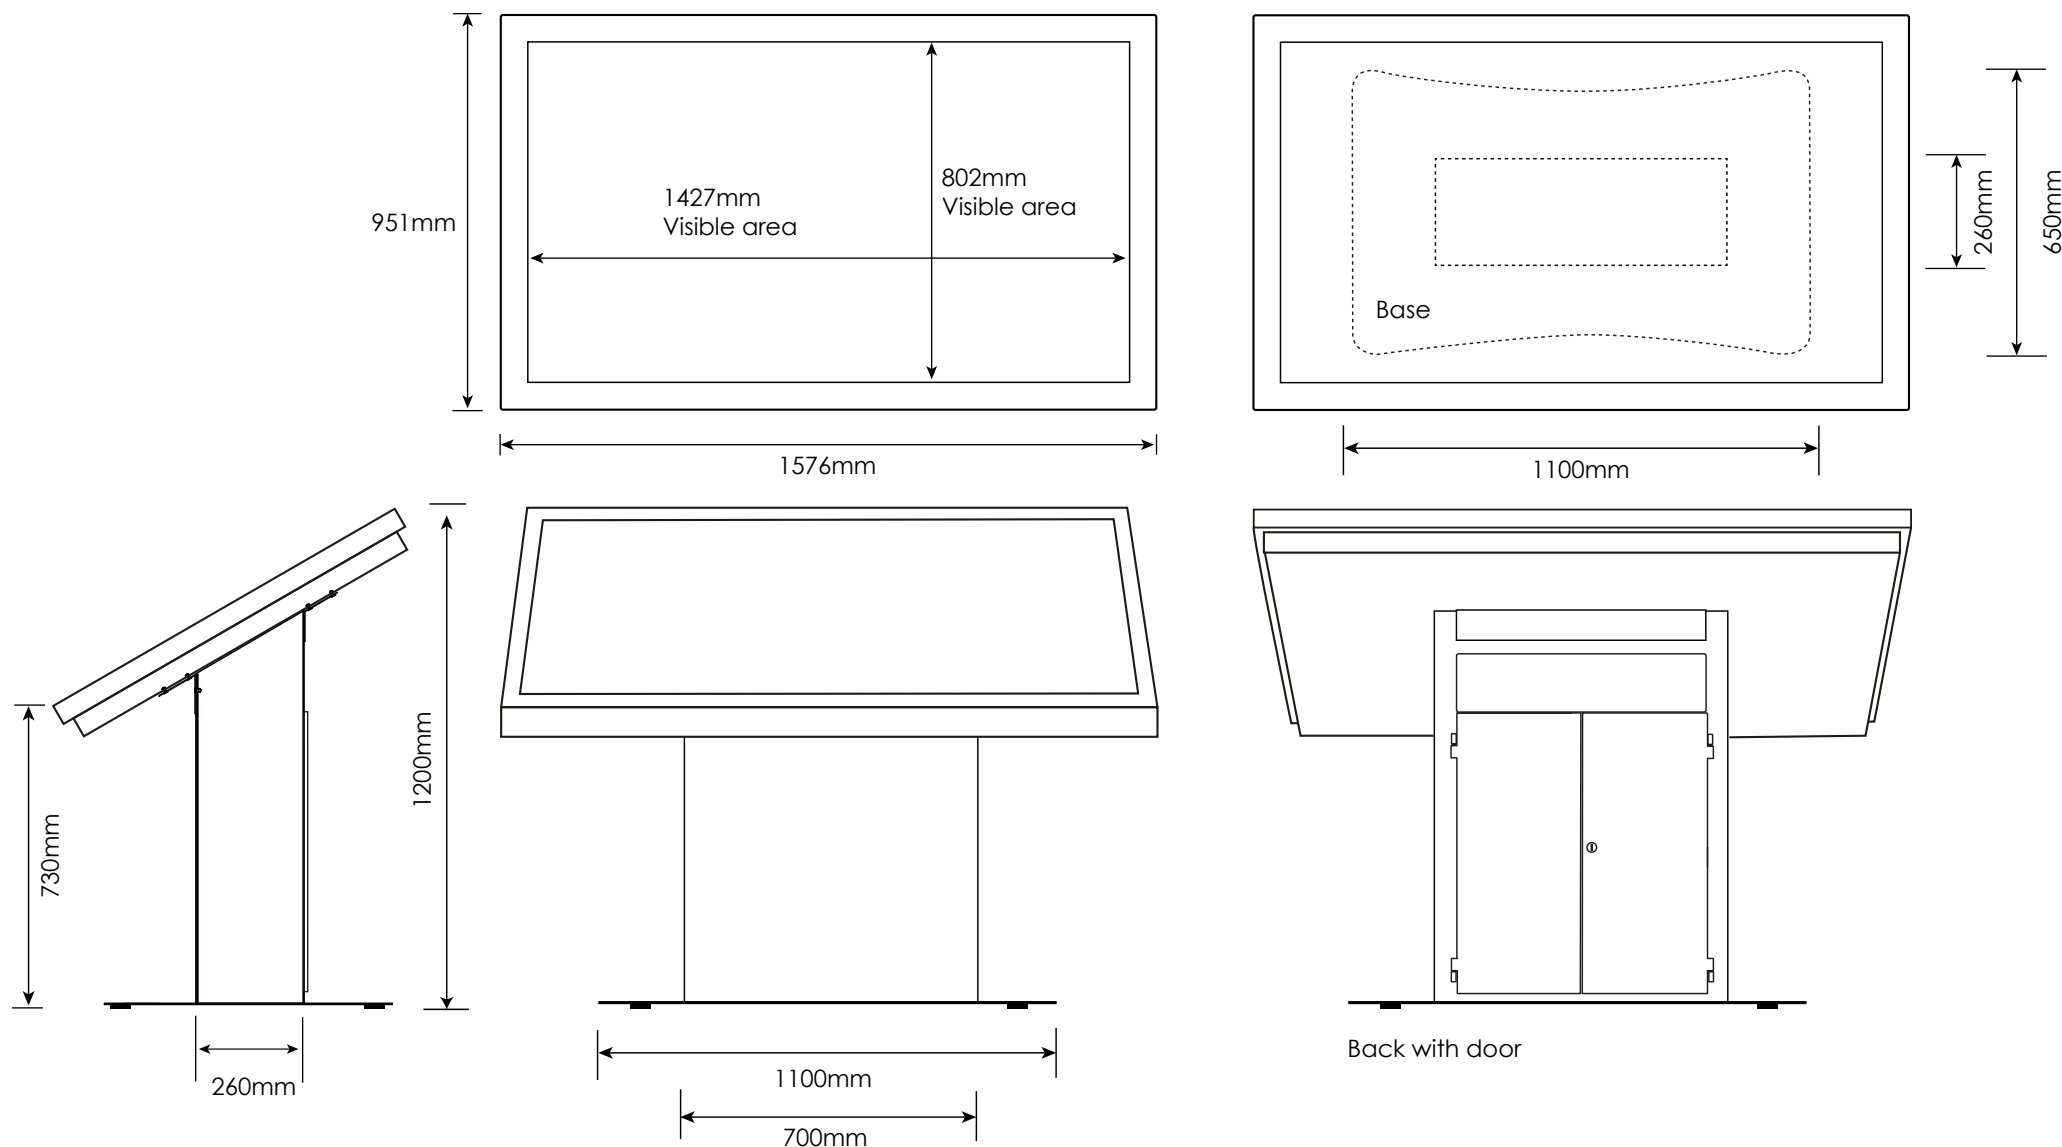


[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

Standard Kiosk with 55" Boxtop touch screen

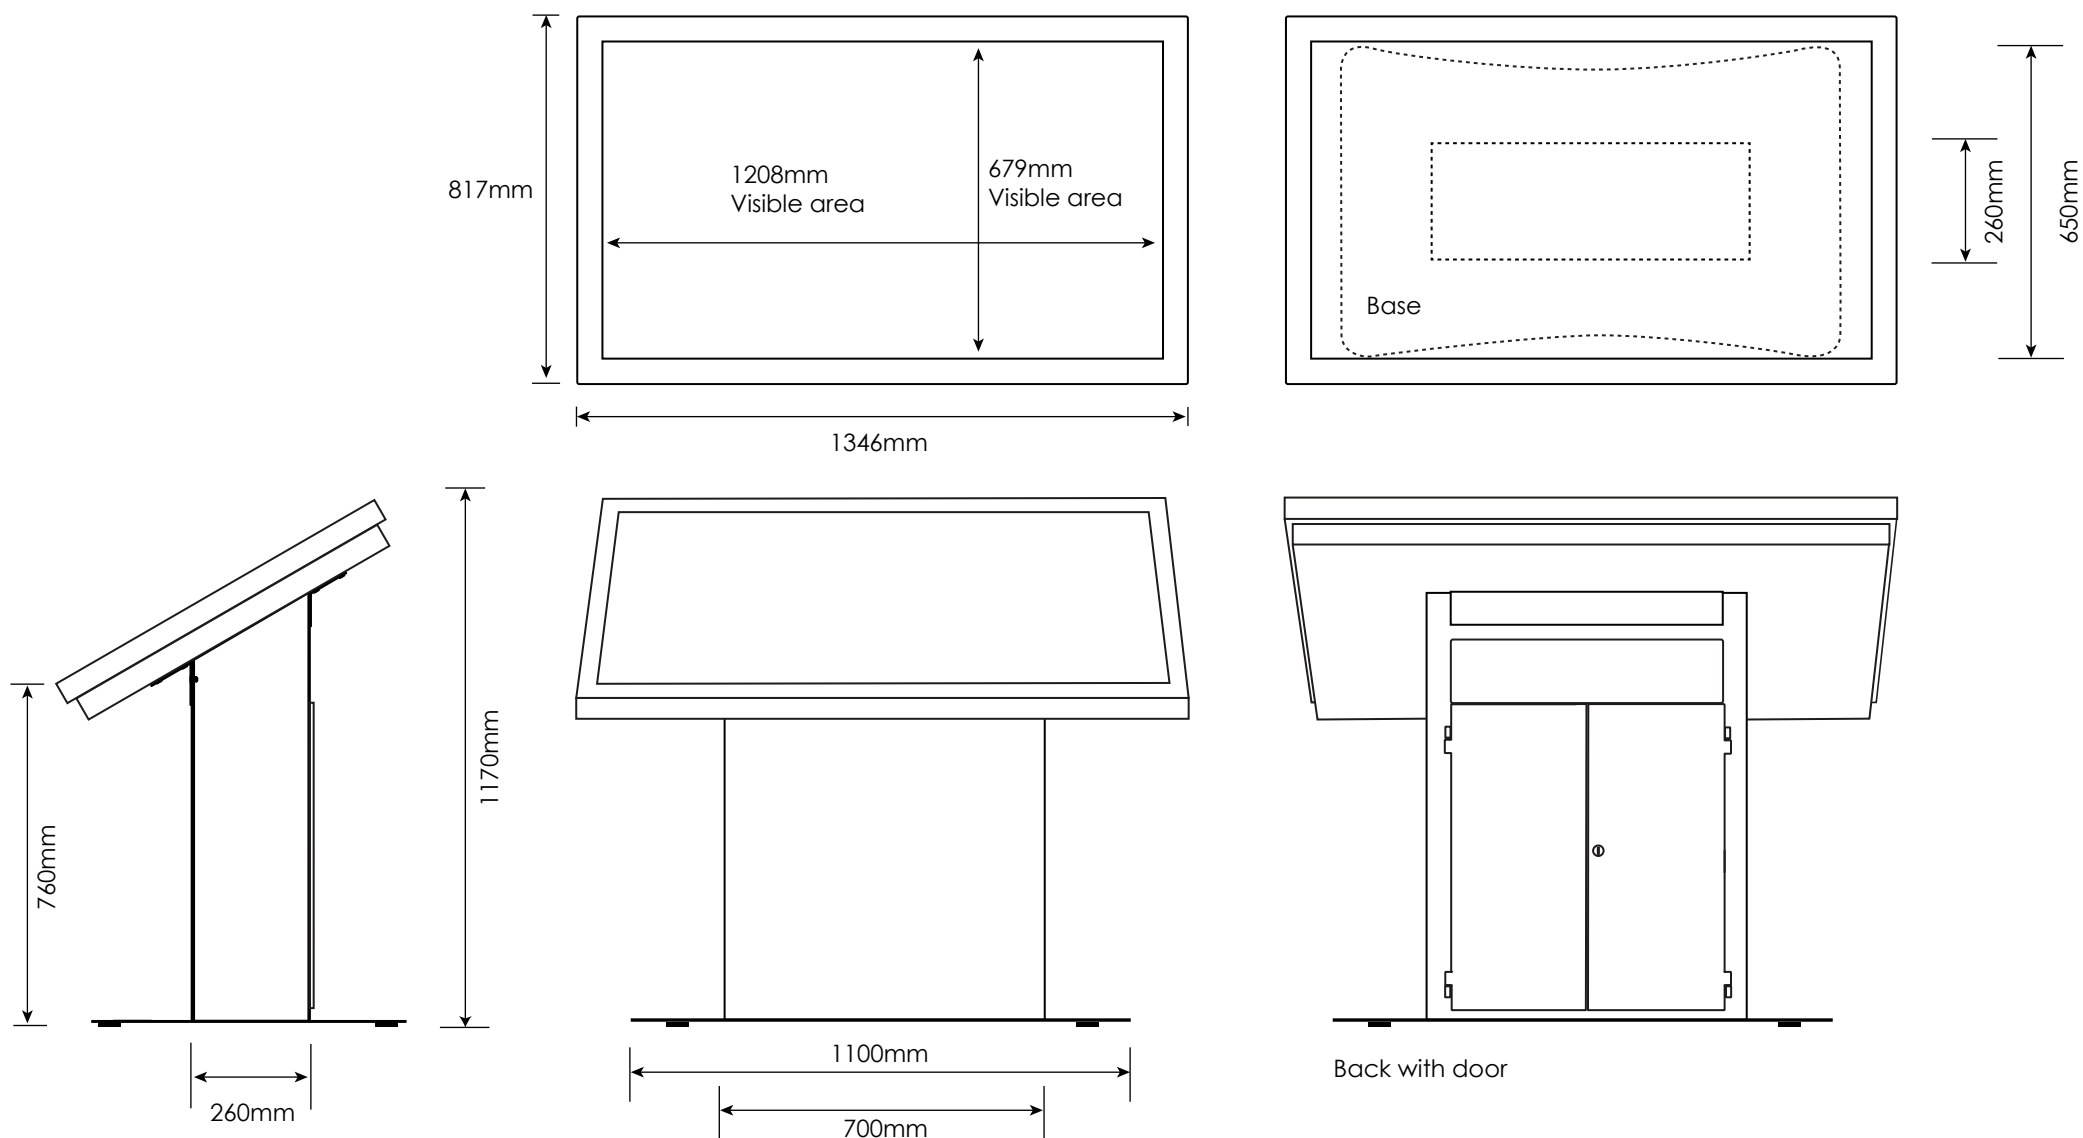

[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

Standard Kiosk with 43" Boxtop touch screen

