




[promultis]

Uno Elite Table

Large electric height adjustable collaborative table with easy access from all sides. Ideal for Conference Rooms, Hospitality Suites, Training Areas and Trade Shows.

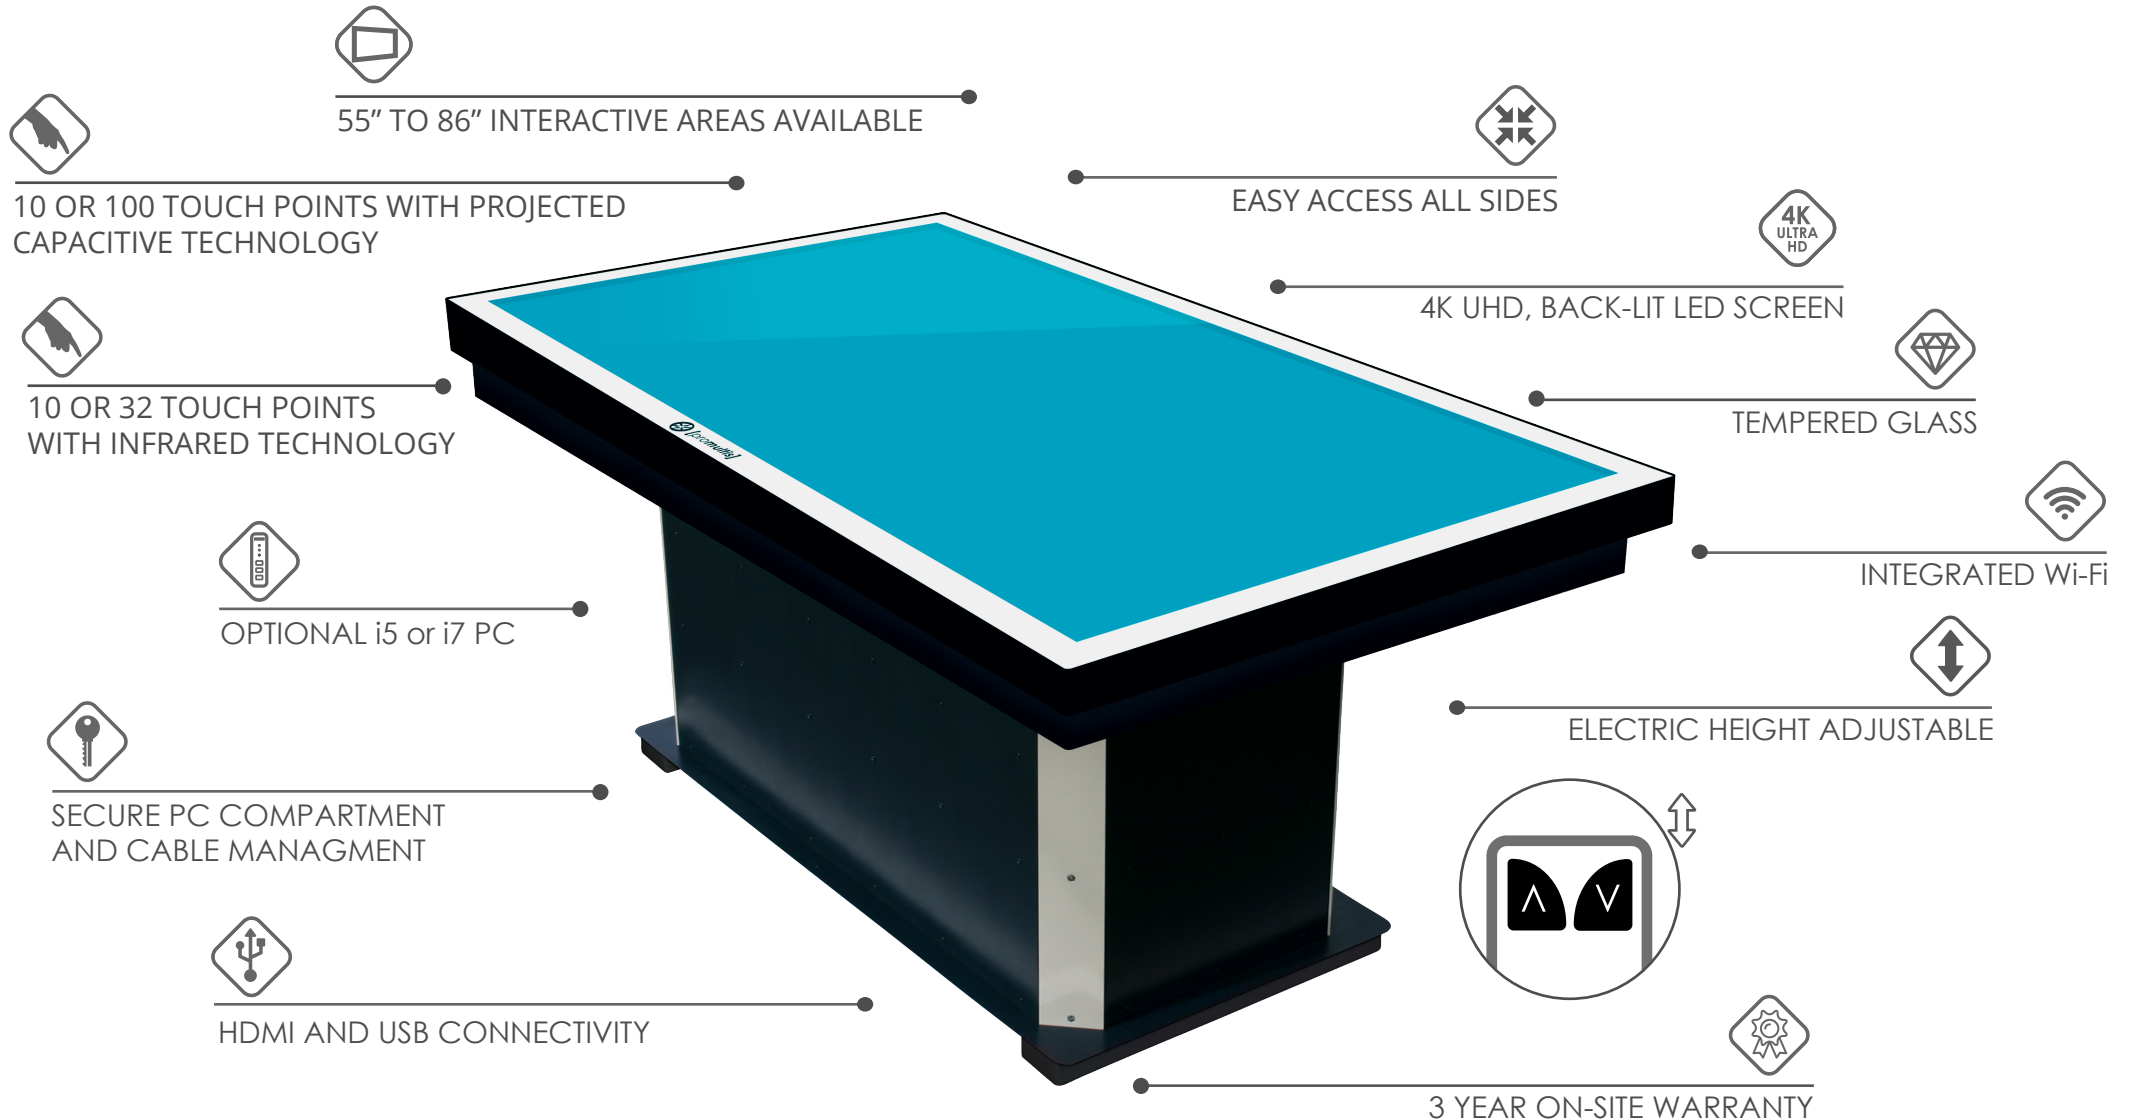

[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794


CHASSIS FEATURES	
Materials	Aluminum & Steel
Glass type	Toughened
Lockable Cabinet	Cable Mangement and PC shelf
Base	Heavy Duty Feet
Weight	180kg
PANEL	
Screen Options	55" 65" 75" 85" 86"
Panel resolution	4K UHD 3840 x 2160
Native resolution	3840 x 2160 60Hz
Brightness (nits)	450
Contrast ratio	1500 to 1
Response time	6ms
Aspect ratio	16x9
Viewing angle	horizontal / vertical 178° / 178°
Pixel pitch	0.744 (mm)
LCD Illumination	Backlit LED
Speakers	10W x2
ENVIRONMENT	
Operating temperature	50°F to 104°F (10°C to 40°C)
Operating Humidity	10% to 80%, non-condensing
Storage Temperature	-4°F to 113°F (-20°C to 45°C)
Storage Humidity	5% to 95%, non-condensing
SHIPPED WITH	
Cables	Power USB HDMI
Remote control	Included
Screen freeze function	On remote control
User manual	Included
WARRANTY	
3 year on-site warranty as standard	

PROJECTED CAPACITIVE TECHNOLOGY	
Detection method	Projected Capacitive
Input method	Finger and gloved finger
Number of simultaneous touches	10, 20 or 100
Noise Shielding	DISPLAX XTR-Shield™ Plus, a proprietary noise filtering technology
Aspect ratio	16:9
Controller	Printed circuit board with mini USB connector
Adhesive	Permanent
Substrate	Toughened Glass
Interface	HID
OS with multitouch	Windows 8.1, 8, 7, 10; Ubuntu 12.04; Android; Chrome OS
OS with single touch	Mac OS X Yosemite
OS with mouse emulation	Spinetix Media Player HMP 200
Data connectivity	USB 2.0
Touch accuracy	1mm absolute
Sensor weight	260 g
Controller weight	60 g
PERFORMANCE	
Substrate thickness	Up to 6mm
Touch response	5 milliseconds
Calibration	Available using control panel: no drift
INFRARED TECHNOLOGY	
Detection method	InfraRed
Input method	Finger, Opaque object, Stylus
Number of simultaneous touches	10 or 32
Interpolation	32,768x32,768
Response time	Repeated touch <6ms
Accuracy	±2mm
Interface	USB 2.0



[promultis]

86" Uno Table with infrared interactive area

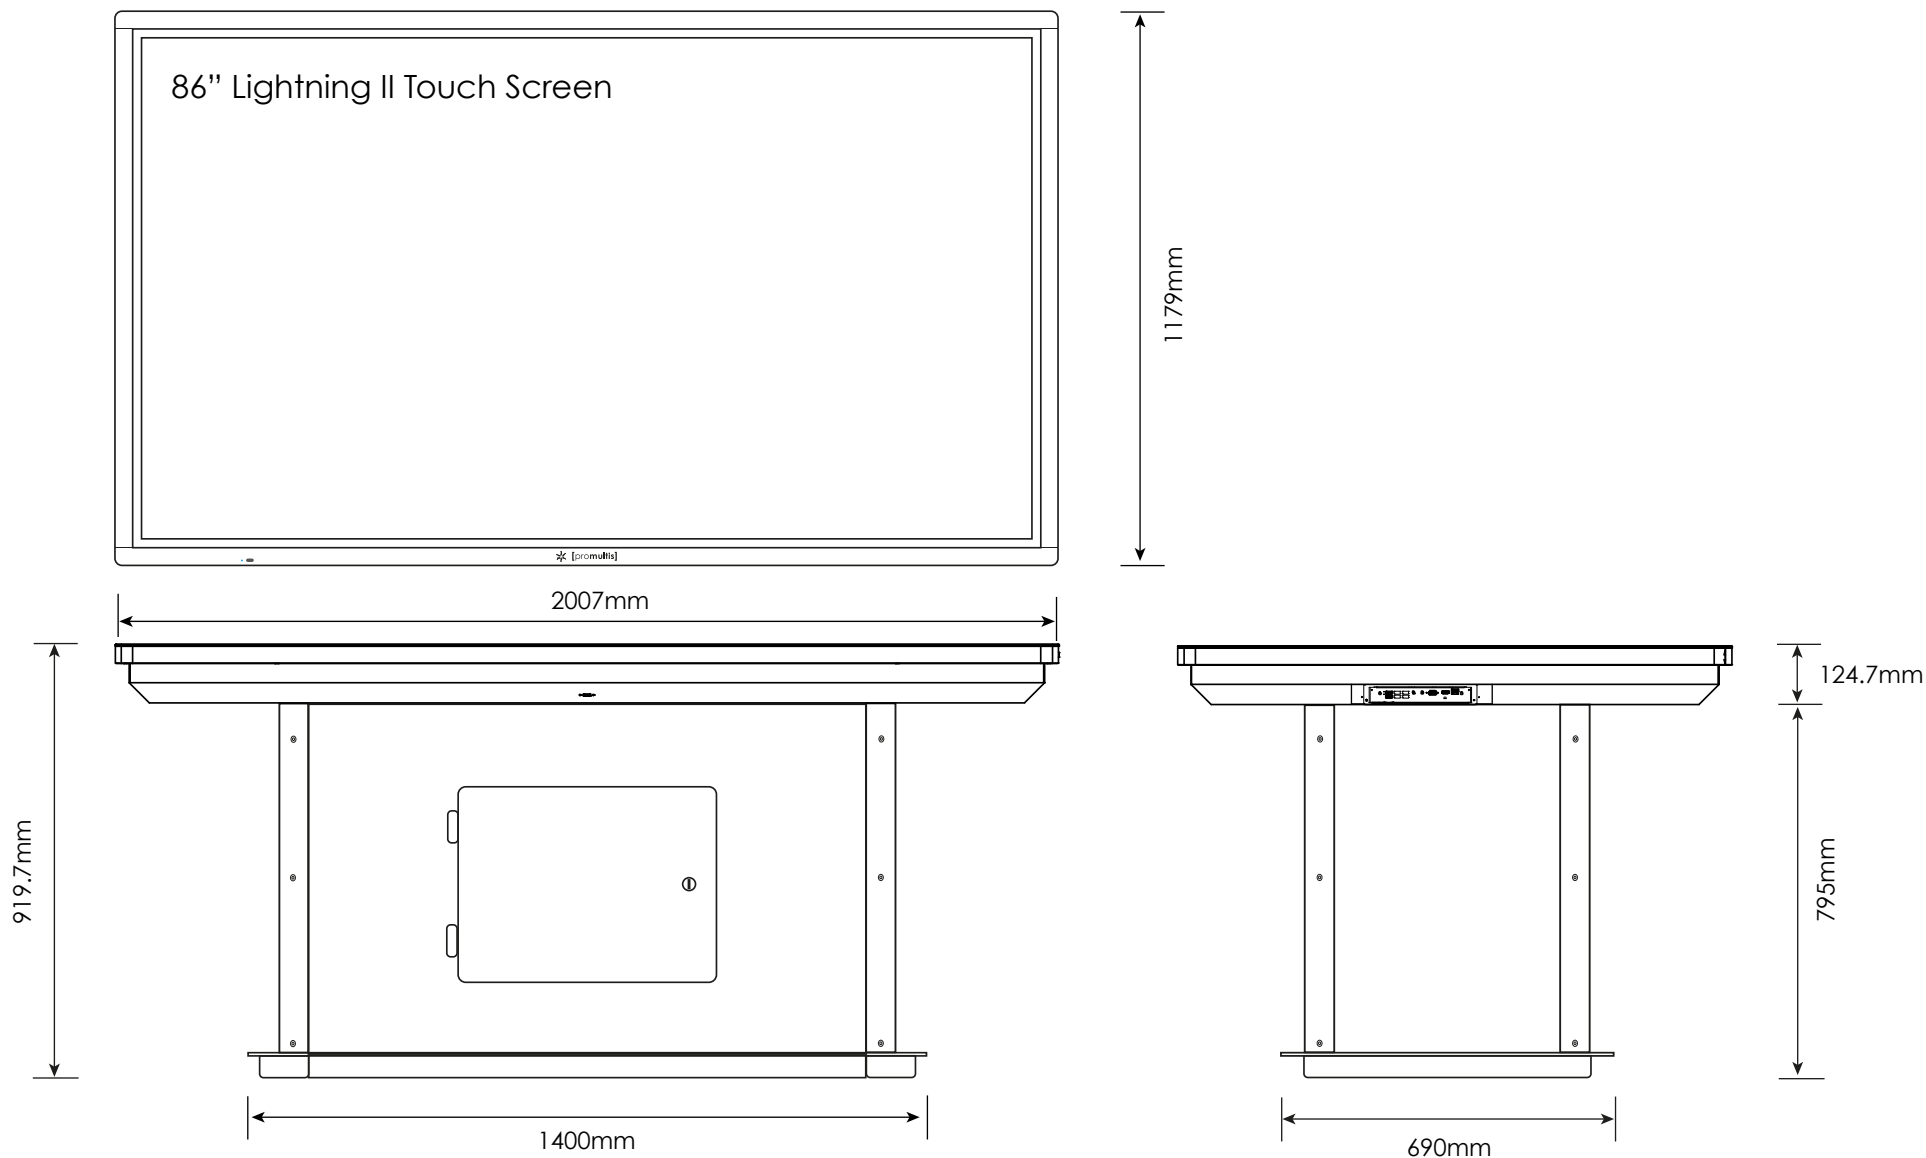

[promultis]
MULTITOUCH SOLUTIONS


Uno Elite Table

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

85" Uno Table with projected capacitive interactive area

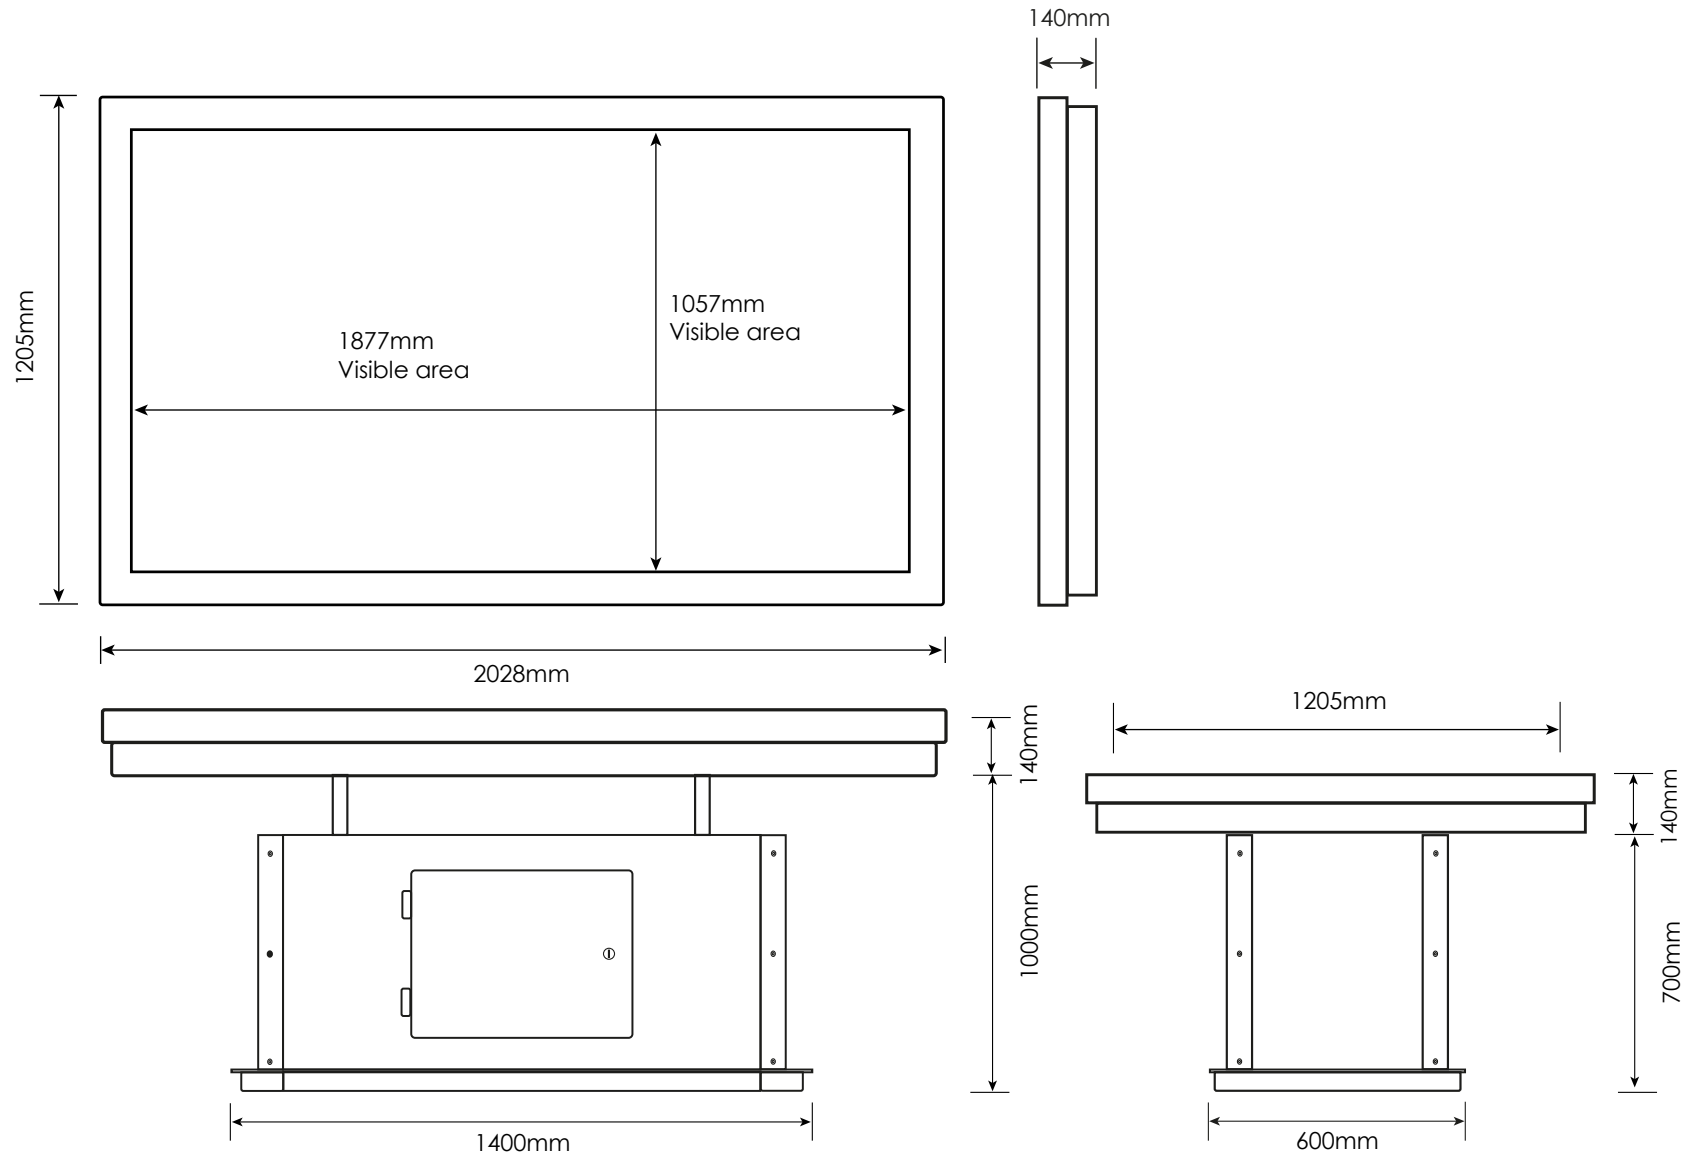


[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

75" Uno Table with projected capacitive interactive area

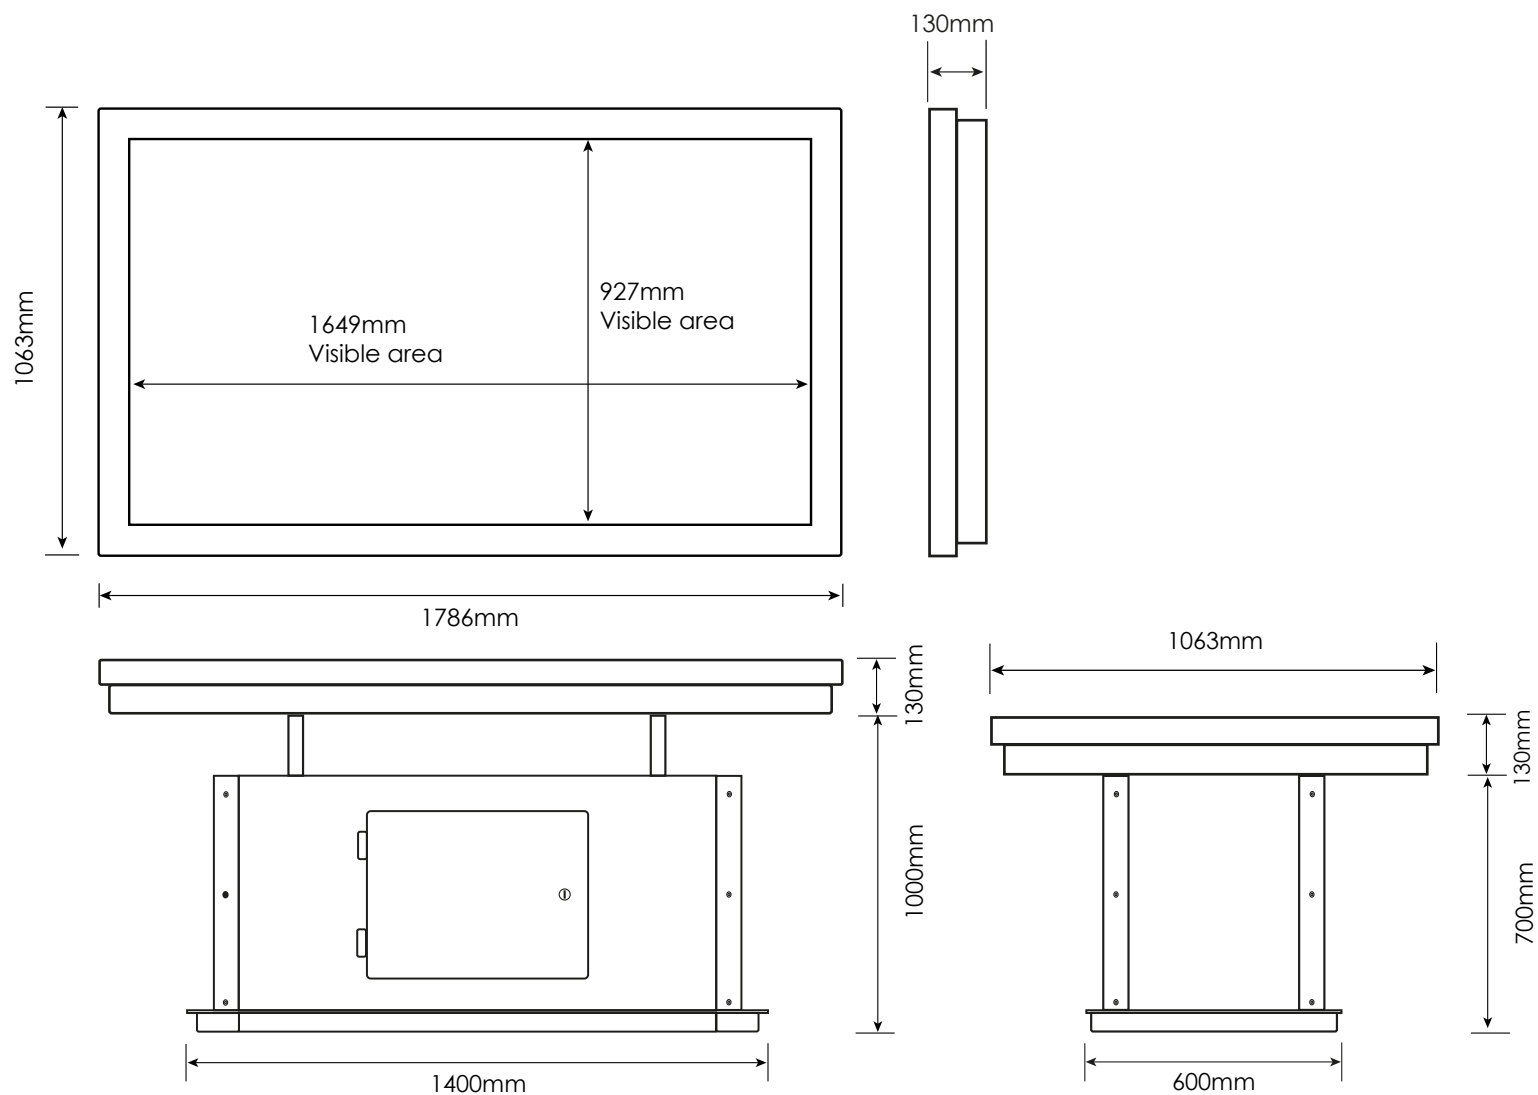


[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

65" Uno Table with projected capacitive interactive area

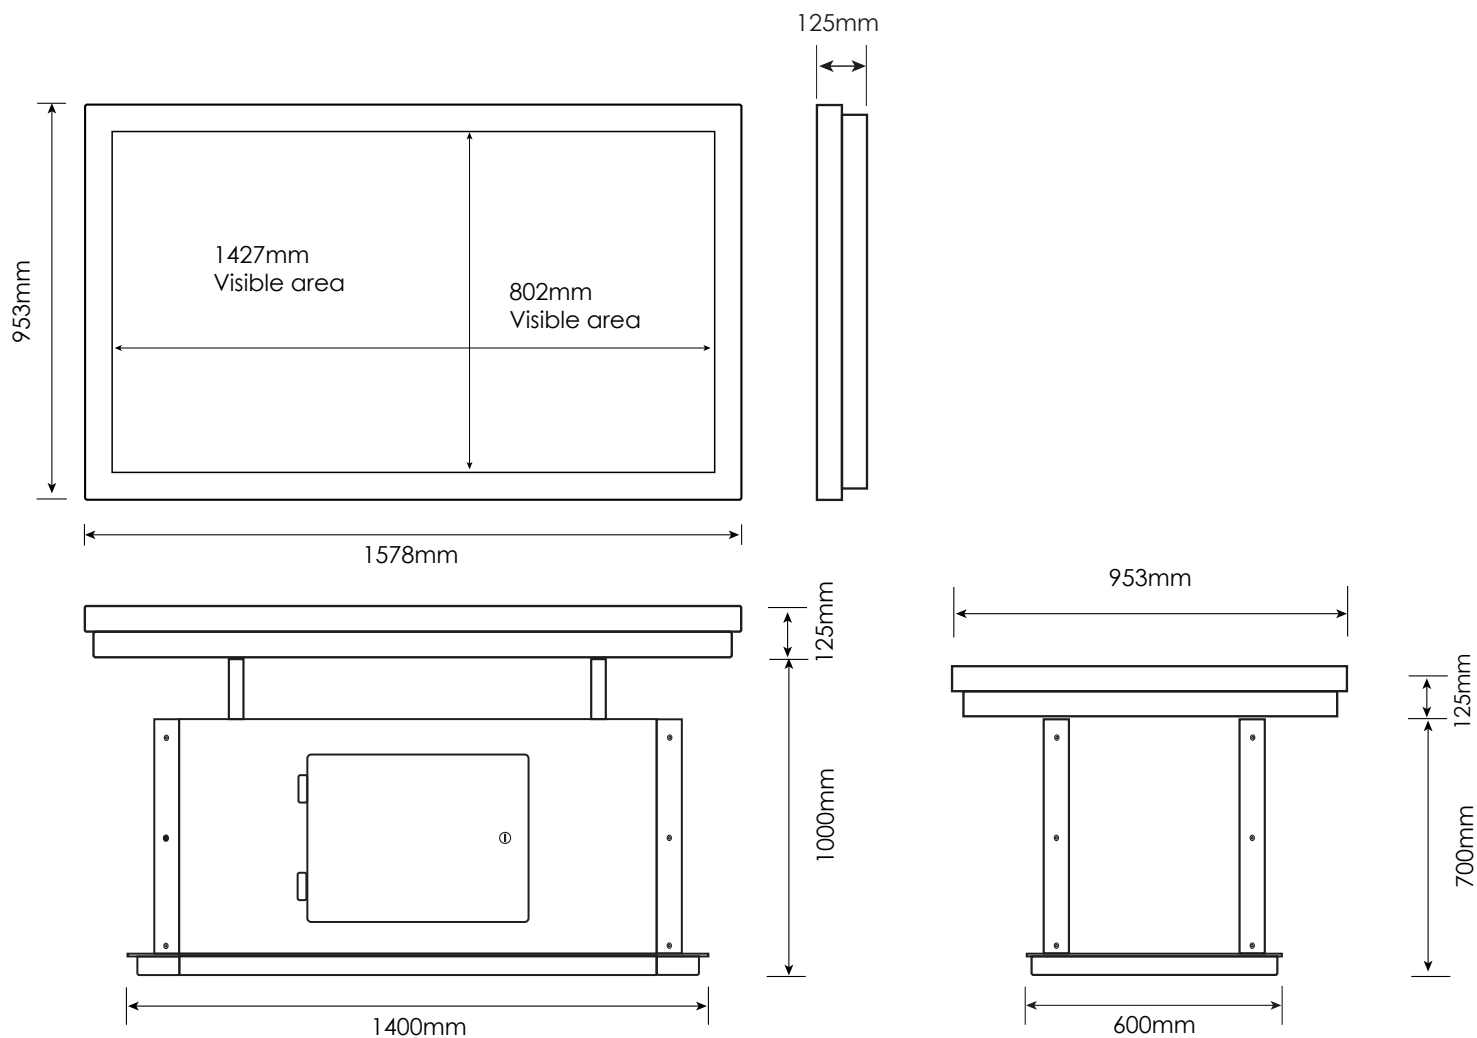


[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

55" Uno Table with projected capacitive interactive area

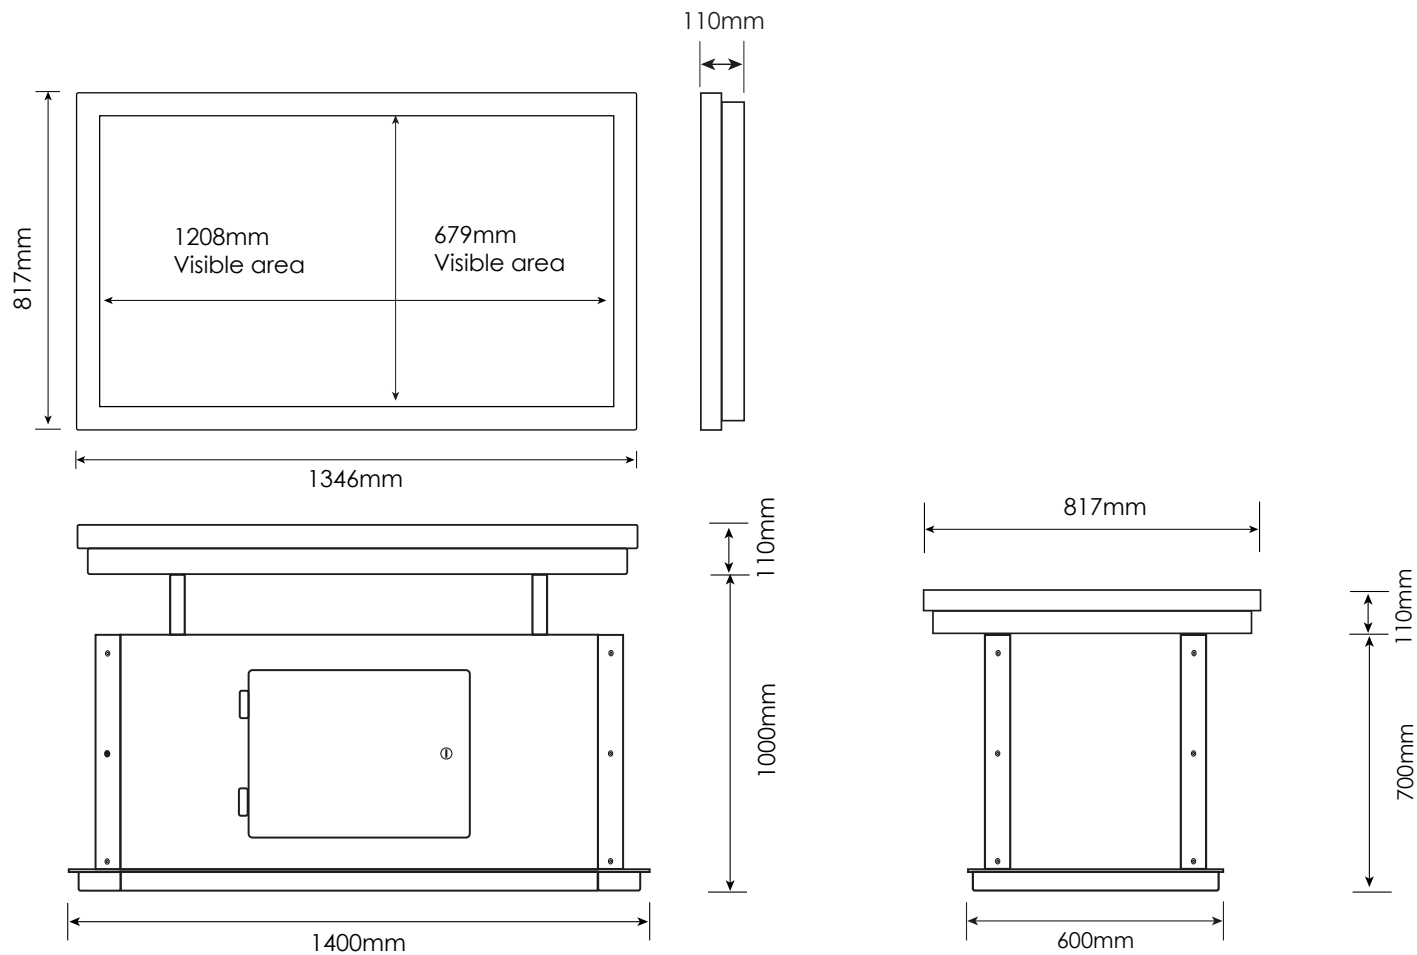

[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794