


Totem 3



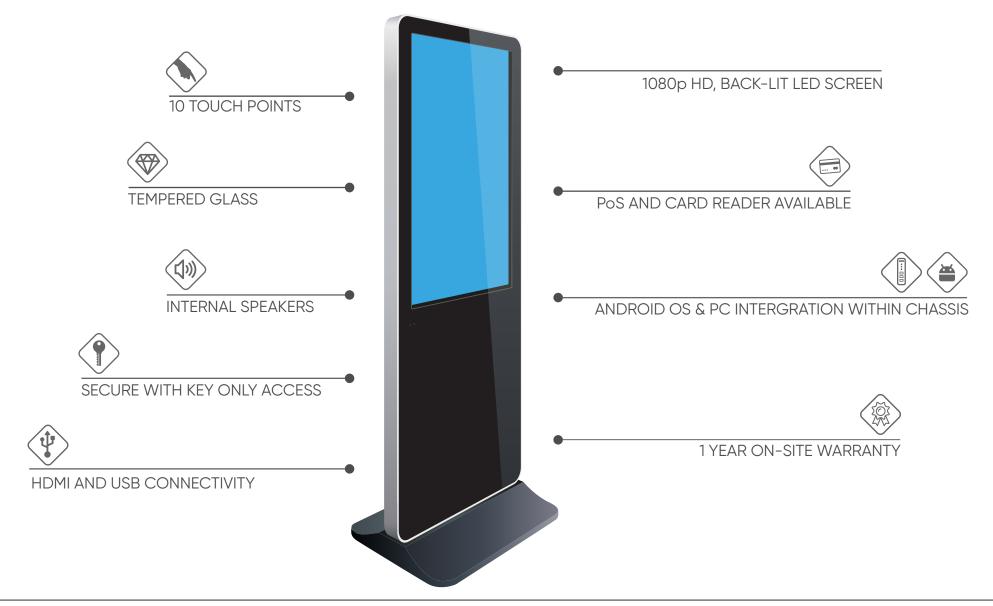

Do you require eye catching multitouch point of sale, wayfinding or digital signage for your reception area or exhibition stand? If so then the tablet like Promultis Totem 3 is perfect for you.

Versatility combined with style and technology from shopping malls and university wayfinding solutions, to restaurant ordering and airport timetables, the Promultis Totem 3 gives you a whole world of possibilities.

Infra-red cell imaging technology uses a thin metal frame overlay and projects an array of LED beams which cross each other vertically and horizontally. This allows detection of any input, including a finder, gloved finger, stylus or pen.



Promultis Interactive Digital Signage Solutions

Connecting brands and services to your audience in real time and include payment options such as credit card terminals. Incorporate QR codes to communicate with consumers digital devices. Data transfer to and from devices via wireless technology and capture analytic data for marketing and data warehousing.



The Promultis Totem 3 is ideally suited for high-traffic locations such as

- Retail environments and shopping malls
- Corporate Spaces
- Local government
- Hospitality
- Transportation hubs
- Exhibitions and Events
- Entertainment
- · Museum & Galleries



Branding Opportunity

The Promultis Totem 3 is ideal for corporate branding or promotions.



IMMERSE Bespoke Interactive Software for Promultis Totem 3



Promultis offer a bespoke software creation service where our software development team will create a multi-touch interactive experience to run on your touch hardware. Visit the IMMERSE website at https://immerse.promultis.info/




CHASSIS FEATURES	
Material	Aluminum & Steel
Colour	Black or white
Glass	4mm Safety Glass
Dimensions	46" - 1805mm (h) x 715mm (w) x 80mm (d)
	55" - 1890mm (h) x 690mm (w) x 85mm (d)
SCREEN	
Active screen size	32" 46" 55" (diagonal)
Panel resolution	1920 x 1080
Luminance	White 360 cd/m2
Colour depth	8bit, 16.7 million colours
Pixel Pitch	0.5415mm x 0.5415 mm
Viewing angle	horizontal / vertical 178° / 178°
LCD Illumination	Backlit LED
TOUCH TECHNOLOGY	
Detection method	InfraRed 10 touch points
Touch sensitive to:	Finger, Opaque object, Stylus
Sunlight Sensitivity	Can be used in direct sunlight
Interpolation	32,768×32,768
Response time	Repeated touch <6ms
Drift	None
Temperature	-20°C~60°C
Accuracy	±2mm
Relative Humidity	10%~90%RH
Supported OS	Windows, MAC, Linux, Android

PC SPECIFICATION			
Processor	Intel i3 3210 (3.4GHz, dual core)		
RAM	4 GB		
Storage	500Gb SATA		
CONNECTIVITY			
Video input	HDMI x1, VGA x1, Ethernet x1, USB x1,		
Audio	Audio input x1, Audio output (mic) x1		
Speaker output	8 Ohm		
USB (for touch)	USB-B		
POWER			
Power Consumption (Min~Max)	40~146W		
Power Consumption Sleep Mode	<1W		
MTBF	50.000 h		
SERVICE & WARRANTY			
3 year on-site warranty as standard			
Extended warranties and SLA's available at an additional cost			






55" Totem 3

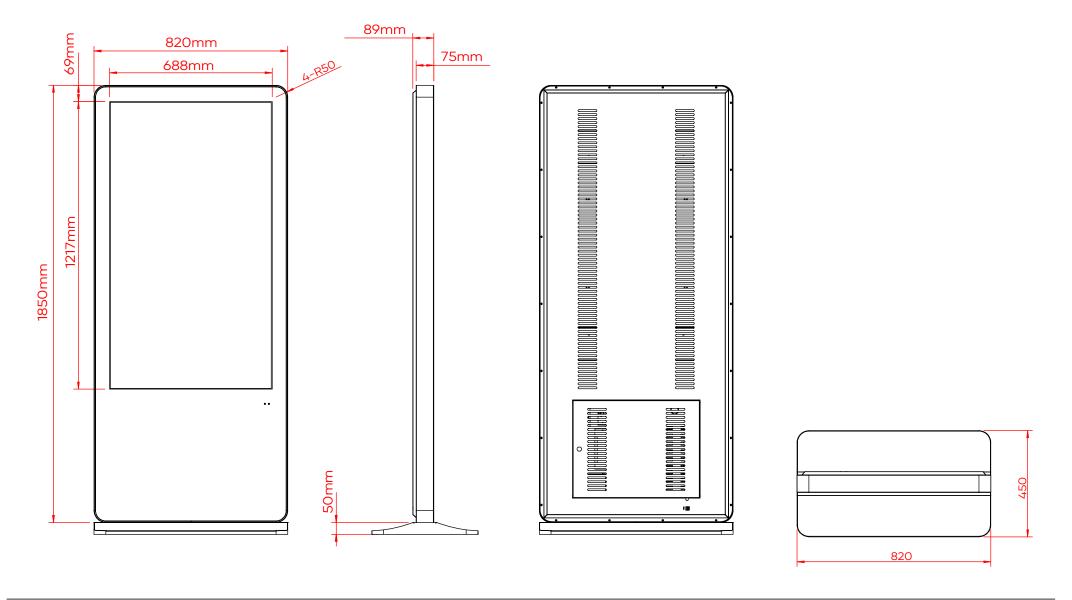





49" Totem 3

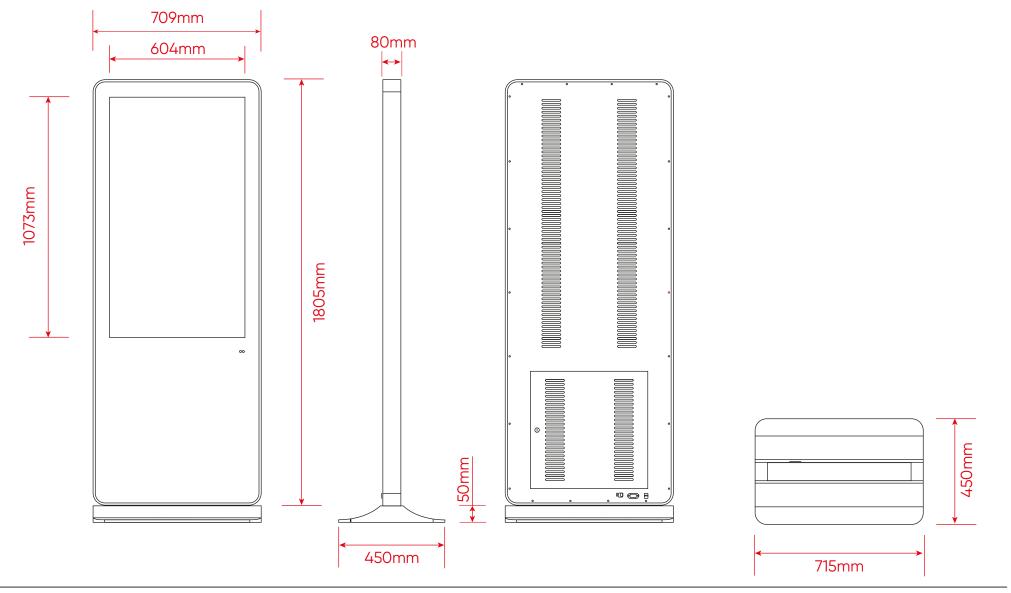





32" Totem 3

