















[promultis]


Outdoor Totem

Single or double-sided, free standing, all-weather outdoor with Digital Signage Solutions

-  WEATHER-PROOF IP RATED STEEL ENCLOSURE
-  10 TOUCH POINTS WITH PROJECTED CAPACITIVE TECHNOLOGY (OPTION)
-  INTEGRATED Wi-Fi
-  TWO INTEL i5 PCs, 8GB RAM, 120GB SSD, WINDOWS 7/8/10
-  SECURE ACCESS PANELS WITH LOCKS
-  INTERNAL SPEAKERS
-  1 YEAR ON-SITE WARRANTY



-  SINGLE OR DOUBLE SIDED
-  HIGH BRIGHTNESS, 1500 NITS LED HD SCREEN
-  6MM SECURE TEMPERED GLASS WITH ANTI-GLARE OPTION
-  FAN COOLING AS STANDARD OR AIR CONDITIONING AS OPTION
-  COMPLIANCE WITH FCC AND CE TO ENSURE DUST AND WATER FREE ENCLOSURE

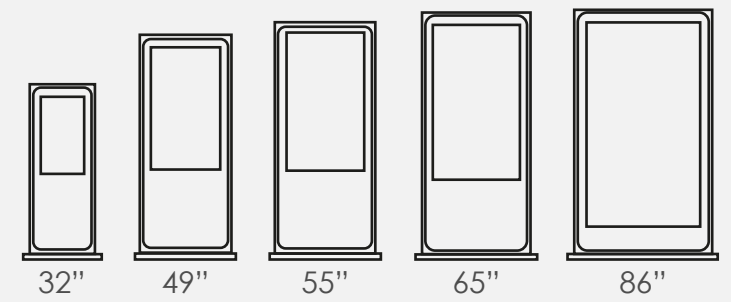


CHASSIS FEATURES	
Panel size	55" TFT-LCD
Display area(mm)/mode	1209.6mm(H) x 680.4mm(W) 16:9
Maximum resolution	1920 x 1080
Display color	16.7M
Pixel Pitch(mm)	0.63mm(H) x 0.63mm(V) (mm)
Brightness (nits) options	1500cd/m ² 2000cd/m ² 2500cd/m ²
Contrast	4000:1
Visual angle	178°/178°
Response time	6.5ms
Life(hrs)	>60,000(hrs)
INPUT AND OUTPUT	
VGA	1
HDMI	1
USB2.0	1
Audio(L/R) input	1
Audio(L/R) output	1
Speaker	2×10W (8 ohm)
VIDEO	
Color system	PAL
Remote controller	Yes
POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤ 3600W
Standby power consumption	<5W

TEMPERATURE	
Working temperature	0°C 50°C
Storage temperature	- 35°C ~ 50°C
Working humidity	85%
Storage humidity	85%
Waterproof grade	Outdoor IP65
Temperature control	Fan cooling as standard or air-conditioning as option
FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P
Split screen display	0.63mm(H) x 0.63mm(V) (mm)
Running subtitle	editable
APPEARANCE	
Panel	White, black, customised
Material	Metal case SPCC
Installation	flood-standing / wall mounted
SERVICE & WARRANTY	
1 year on-site warranty as standard	
Extended warranties and SLA's available at an additional cost	



[promultis]

55" Outdoor Totem Dual Sided

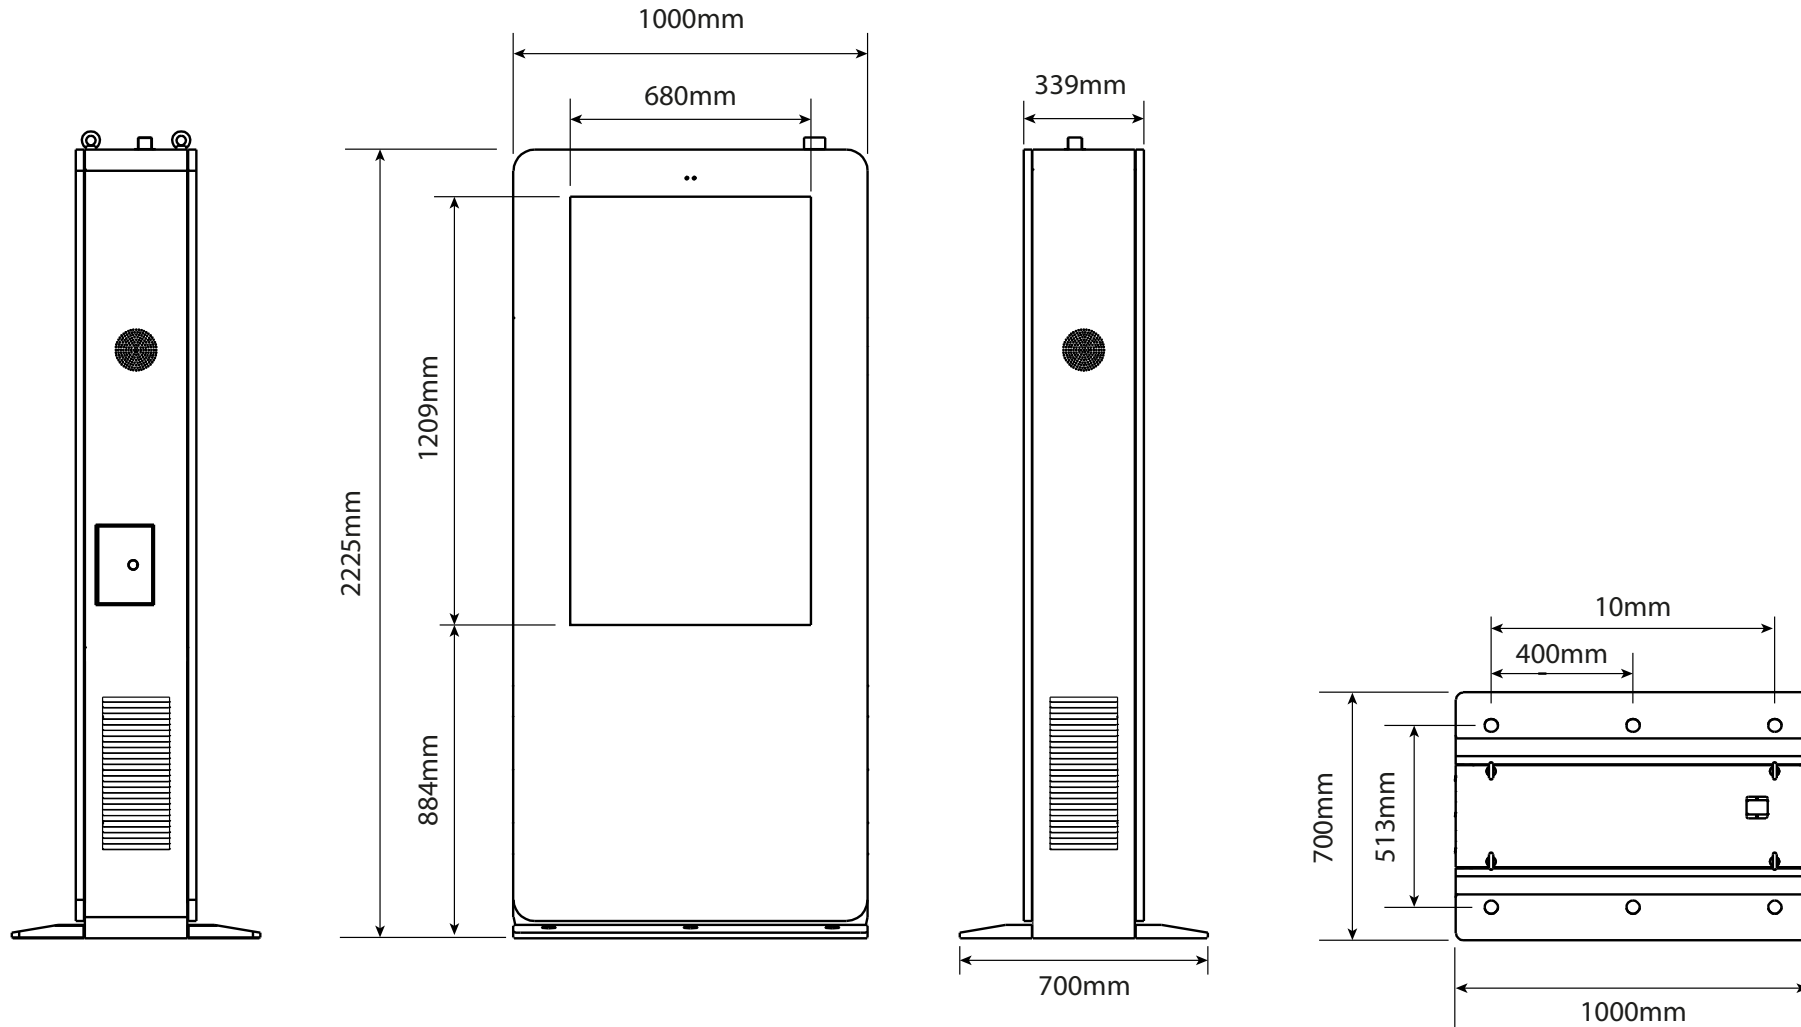

CHASSIS FEATURES

Panel size	65" TFT-LCD
Display area(mm)/mode	1428.5mm(H) x 803.5mm(W) 16:9
Maximum resolution	1920 x 1080
Display color	16.7M
Pixel Pitch(mm)	0.63mm(H) x 0.63mm(V) (mm)
Brightness (nits) options	1500cd/m ² 2000cd/m ² 2500cd/m ²
Contrast	4000:1
Visual angle	178°/178°
Response time	6.5ms
Life(hrs)	>60,000(hrs)

INPUT AND OUTPUT

VGA	1
HDMI	1
USB2.0	2
Audio(L/R) input	1
Audio(L/R) output	1
Speaker	2×10W (8 ohm)

VIDEO

Color system	PAL
Remote controller	Yes

POWER

Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤ 3600W
Standby power consumption	<5W

TEMPERATURE

Working temperature	0°C 50°C
Storage temperature	- 35°C ~ 50°C
Working humidity	85%
Storage humidity	85%
Waterproof grade	Outdoor IP65
Temperature control	Fan cooling as standard or air-conditioning as option

FUNCTIONS

Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P
Split screen display	0.63mm(H) x 0.63mm(V) (mm)
Running subtitle	editable

APPEARANCE

Panel	White, black, customised
Material	Metal case SPCC
Installation	flood-standing / wall mounted

SERVICE & WARRANTY

1 year on-site warranty as standard
Extended warranties and SLA's available at an additional cost



[promultis]

65" Outdoor Totem Dual Sided

