




[promultis]

Outdoor Totem

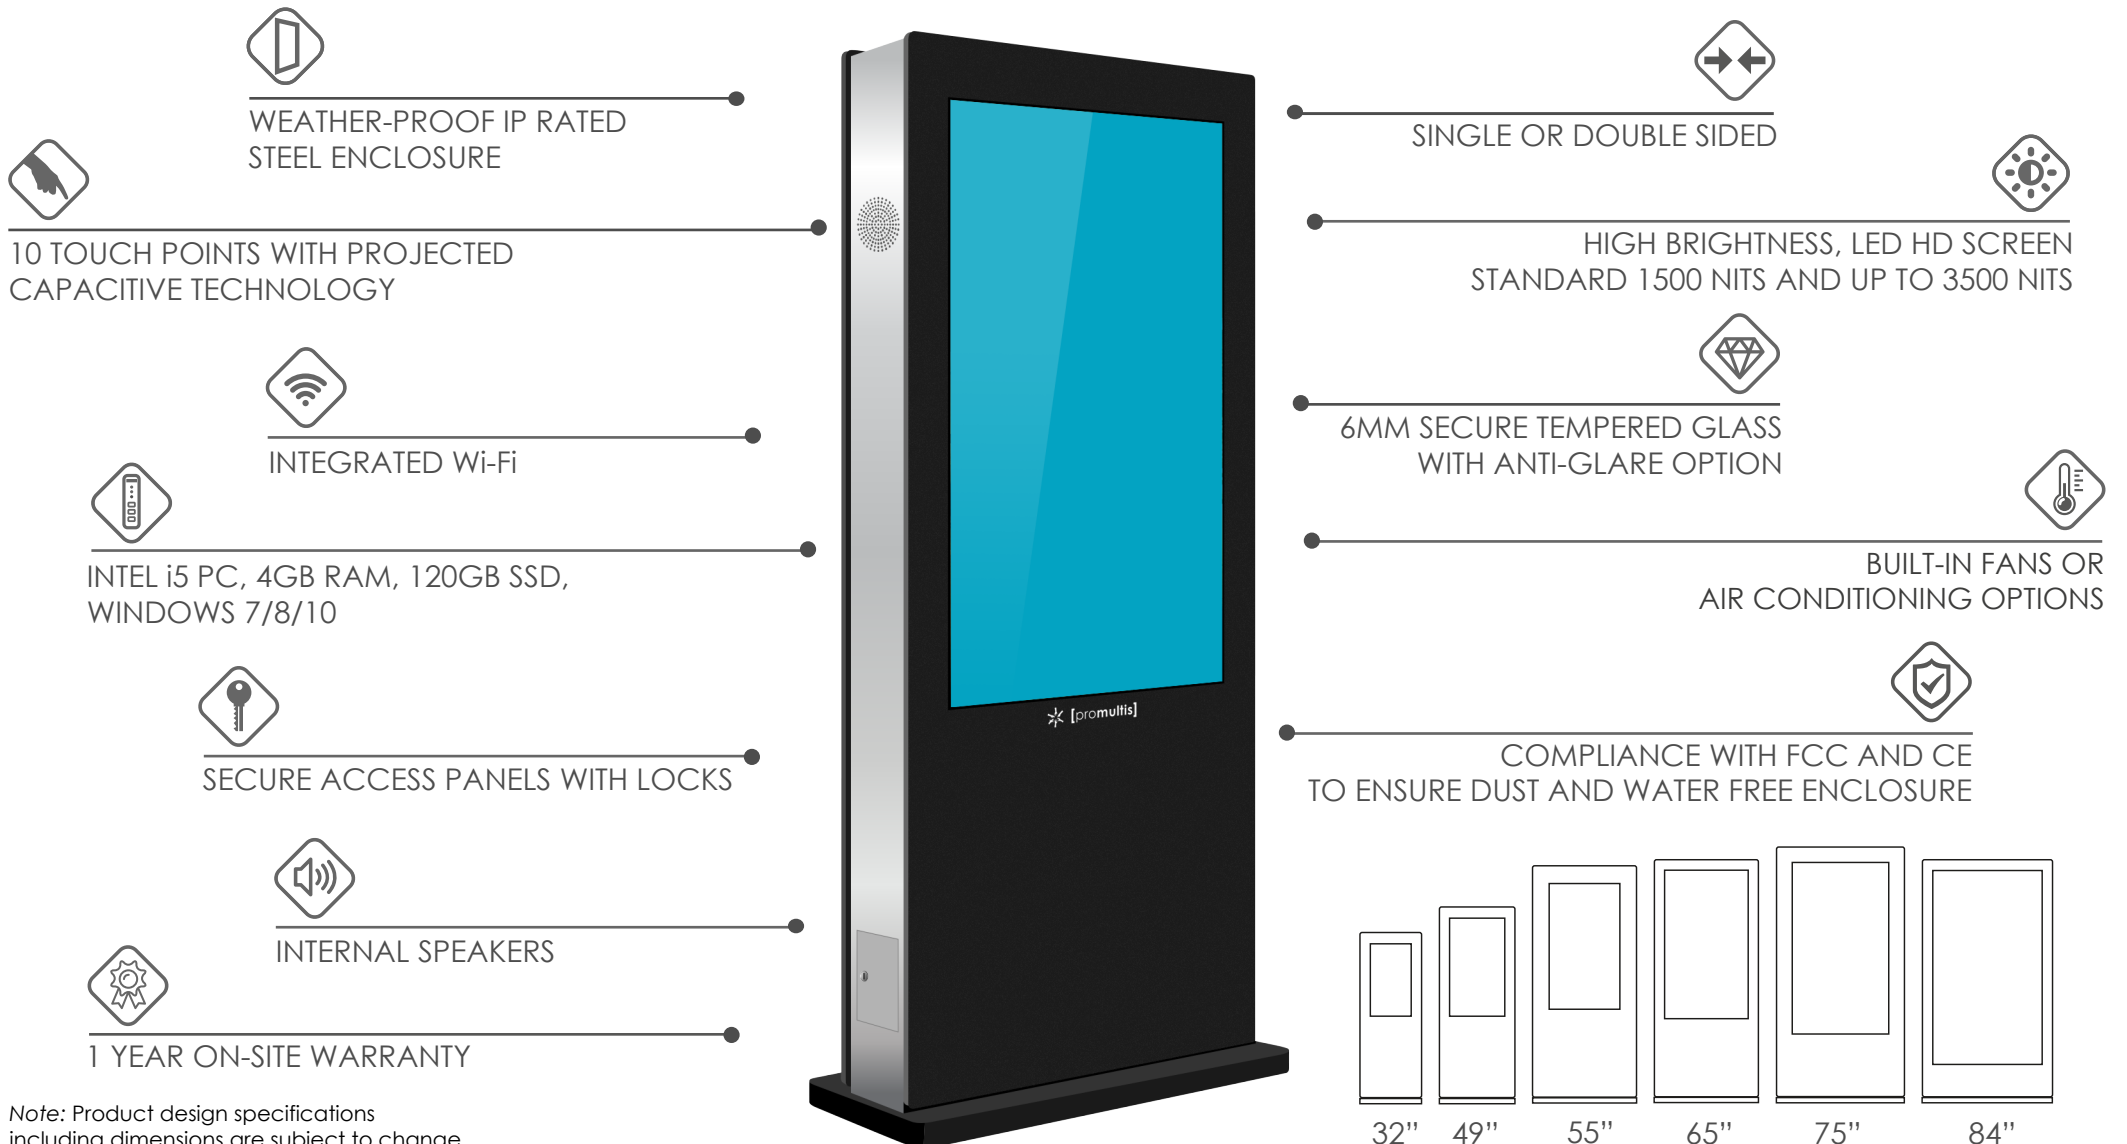

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

CHASSIS FEATURES	
Panel size	43" TFT-LCD
Display area(mm)/mode	943.2mm(H) x 531.4mm(W) 16:9
Maximum resolution	1920 x 1080
Display color	16.7M
Pixel Pitch(mm)	0.63mm(H) x 0.63mm(V) (mm)
Brightness (nits) options	1500cd/m ² 2500cd/m ² 3500cd/m ²
Contrast	4000:1
Visual angle	178°/178°
Response time	6.5ms
Life(hrs)	>60,000(hrs)
INPUT AND OUTPUT	
VGA	1
HDMI	1
USB2.0	1
Audio(L/R) input	1
Audio(L/R) output	1
Speaker	2×10W (8 ohm)
VIDEO	
Color system	PAL
Remote controller	Yes
POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤ 3600W
Standby power consumption	<5W


TEMPERATURE	
Working temperature	0°C 50°C
Storage temperature	- 35°C ~ 50°C
Working humidity	85%
Storage humidity	85%
Waterproof grade	Outdoor IP65
Temperature control	Fan cooling as standard or air-conditioning as option
FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P
Split screen display	0.63mm(H) x 0.63mm(V) (mm)
Running subtitle	editable
APPEARANCE	
Panel	White, black, customised
Material	Metal case SPCC
Installation	flood-standing / wall mounted
SERVICE & WARRANTY	
1 year on-site warranty as standard	
Extended warranties and SLA's available at an additional cost	

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]

43" Outdoor Totem

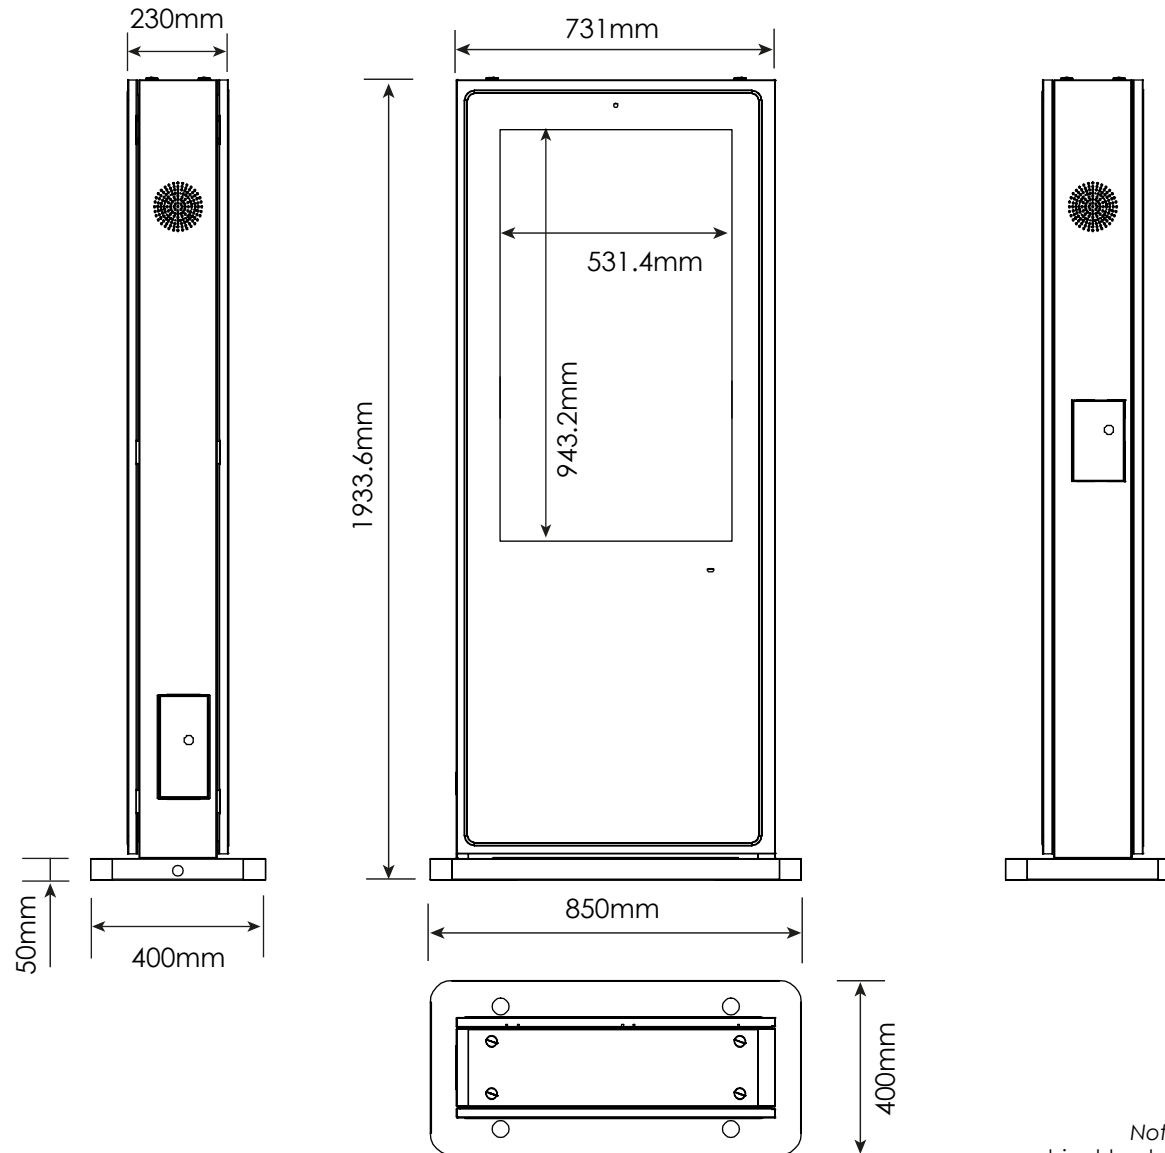

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

CHASSIS FEATURES	
Panel size	49" TFT-LCD
Display area(mm)/mode	1078.8mm(H) x 609mm(W) 16:9
Maximum resolution	1920 x 1080
Display color	16.7M
Pixel Pitch(mm)	0.63mm(H) x 0.63mm(V) (mm)
Brightness (nits) options	1500cd/m ² 2500cd/m ² 3500cd/m ²
Contrast	4000:1
Visual angle	178°/178°
Response time	6.5ms
Life(hrs)	>60,000(hrs)
INPUT AND OUTPUT	
VGA	1
HDMI	1
USB2.0	1
Audio(L/R) input	1
Audio(L/R) output	1
Speaker	2×10W (8 ohm)
VIDEO	
Color system	PAL
Remote controller	Yes
POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤ 3600W
Standby power consumption	<5W


TEMPERATURE	
Working temperature	0°C 50°C
Storage temperature	- 35°C ~ 50°C
Working humidity	85%
Storage humidity	85%
Waterproof grade	Outdoor IP65
Temperature control	Fan cooling as standard or air-conditioning as option
FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P
Split screen display	0.63mm(H) x 0.63mm(V) (mm)
Running subtitle	editable
APPEARANCE	
Panel	White, black, customised
Material	Metal case SPCC
Installation	flood-standing / wall mounted
SERVICE & WARRANTY	
1 year on-site warranty as standard	
Extended warranties and SLA's available at an additional cost	

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]

49" Outdoor Totem

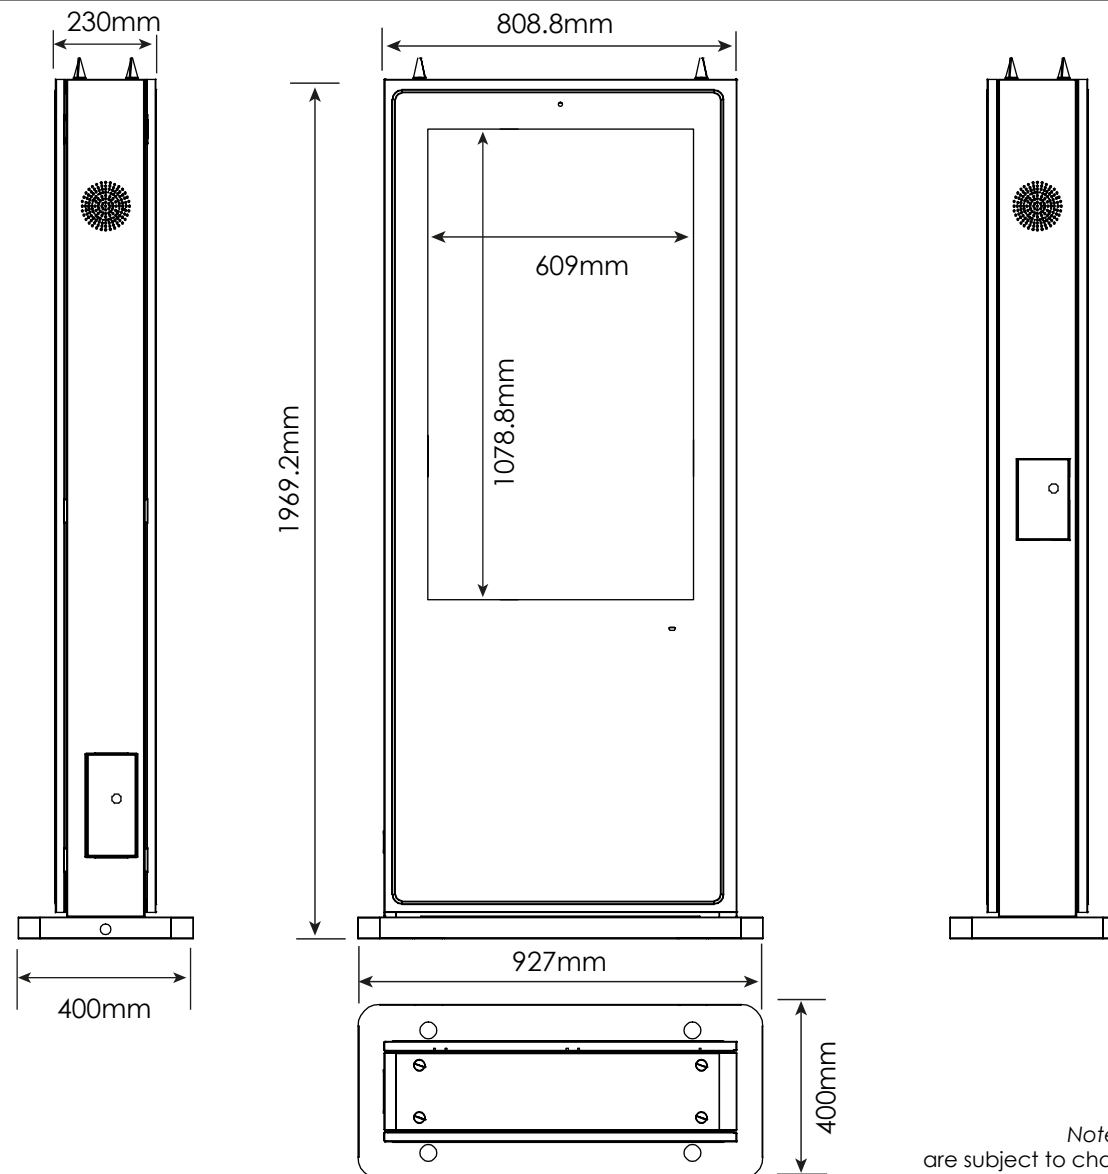

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

CHASSIS FEATURES	
Panel size	55" TFT-LCD
Display area(mm)/mode	1209.6mm(H) x 680.4mm(W) 16:9
Maximum resolution	1920 x 1080
Display color	16.7M
Pixel Pitch(mm)	0.63mm(H) x 0.63mm(V) (mm)
Brightness (nits) options	1500cd/m ² 2500cd/m ² 3500cd/m ²
Contrast	4000:1
Visual angle	178°/178°
Response time	6.5ms
Life(hrs)	>60,000(hrs)
INPUT AND OUTPUT	
VGA	1
HDMI	1
USB2.0	1
Audio(L/R) input	1
Audio(L/R) output	1
Speaker	2×10W (8 ohm)
VIDEO	
Color system	PAL
Remote controller	Yes
POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤ 3600W
Standby power consumption	<5W



TEMPERATURE	
Working temperature	0°C 50°C
Storage temperature	- 35°C ~ 50°C
Working humidity	85%
Storage humidity	85%
Waterproof grade	Outdoor IP65
Temperature control	Fan cooling as standard or air-conditioning as option
FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P
Split screen display	0.63mm(H) x 0.63mm(V) (mm)
Running subtitle	editable
APPEARANCE	
Panel	White, black, customised
Material	Metal case SPCC
Installation	flood-standing / wall mounted
SERVICE & WARRANTY	
1 year on-site warranty as standard	
Extended warranties and SLA's available at an additional cost	

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]

55" Outdoor Totem

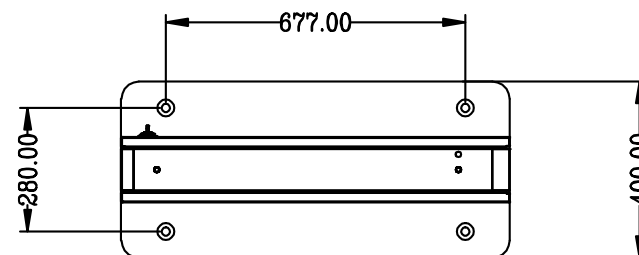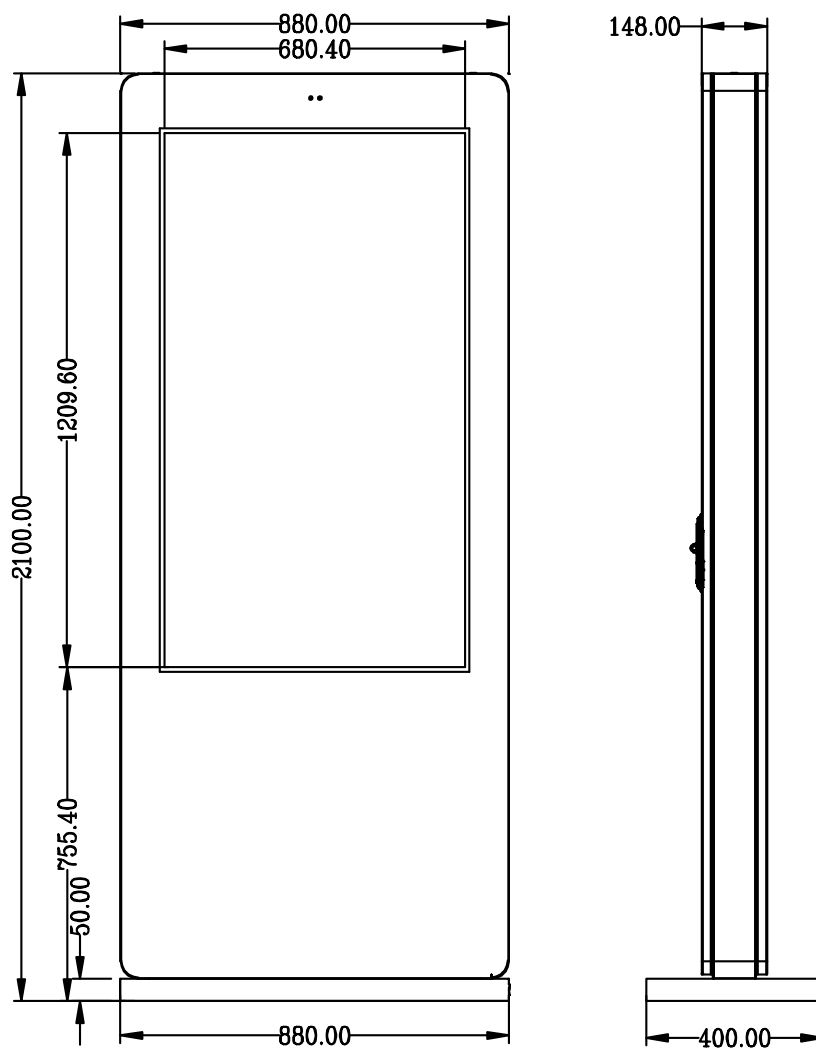

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.




[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

55" Outdoor Totem Dual Sided

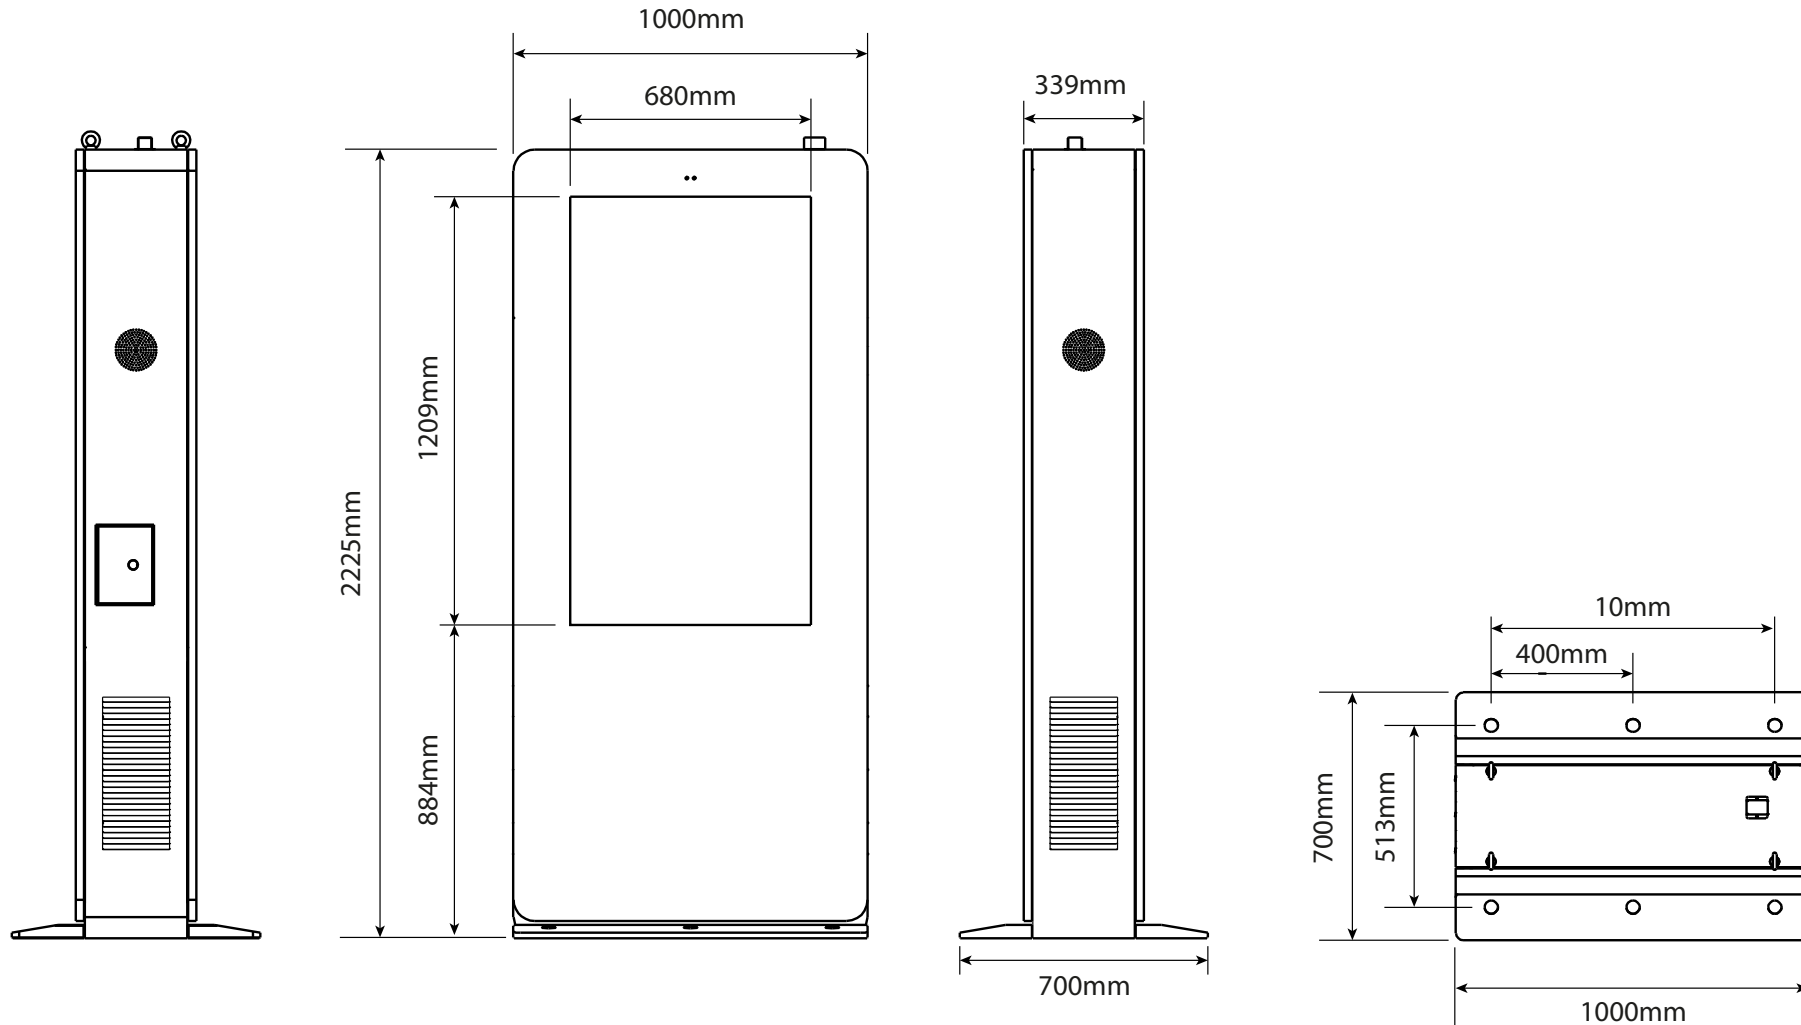

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

CHASSIS FEATURES	
Panel size	65" TFT-LCD
Display area(mm)/mode	1428.5mm(H) x 803.5mm(W) 16:9
Maximum resolution	1920 x 1080
Display color	16.7M
Pixel Pitch(mm)	0.63mm(H) x 0.63mm(V) (mm)
Brightness (nits) options	1500cd/m ² as standard and up to 3500cd/m ²
Contrast	3500:1
Visual angle	178°/178°
Response time	5ms
Life(hrs)	>60,000(hrs)
INPUT AND OUTPUT	
VGA	1
HDMI	1
USB2.0	2
Audio(L/R) input	1
Audio(L/R) output	1
Speaker	2×10W (8 ohm)
VIDEO	
Color system	PAL
Remote controller	Yes
POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤ 360W
Standby power consumption	<5W


TEMPERATURE	
Working temperature	0°C 50°C
Storage temperature	- 35°C ~ 50°C
Working humidity	85%
Storage humidity	85%
Waterproof grade	Outdoor IP65
Temperature control	Fan cooling as standard or air-conditioning as option
FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P
Split screen display	0.63mm(H) x 0.63mm(V) (mm)
Running subtitle	editable
APPEARANCE	
Panel	White, black, customised
Material	Metal case SPCC
Installation	flood-standing / wall mounted
SERVICE & WARRANTY	
1 year on-site warranty as standard	
Extended warranties and SLA's available at an additional cost	

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]

65" Outdoor Totem

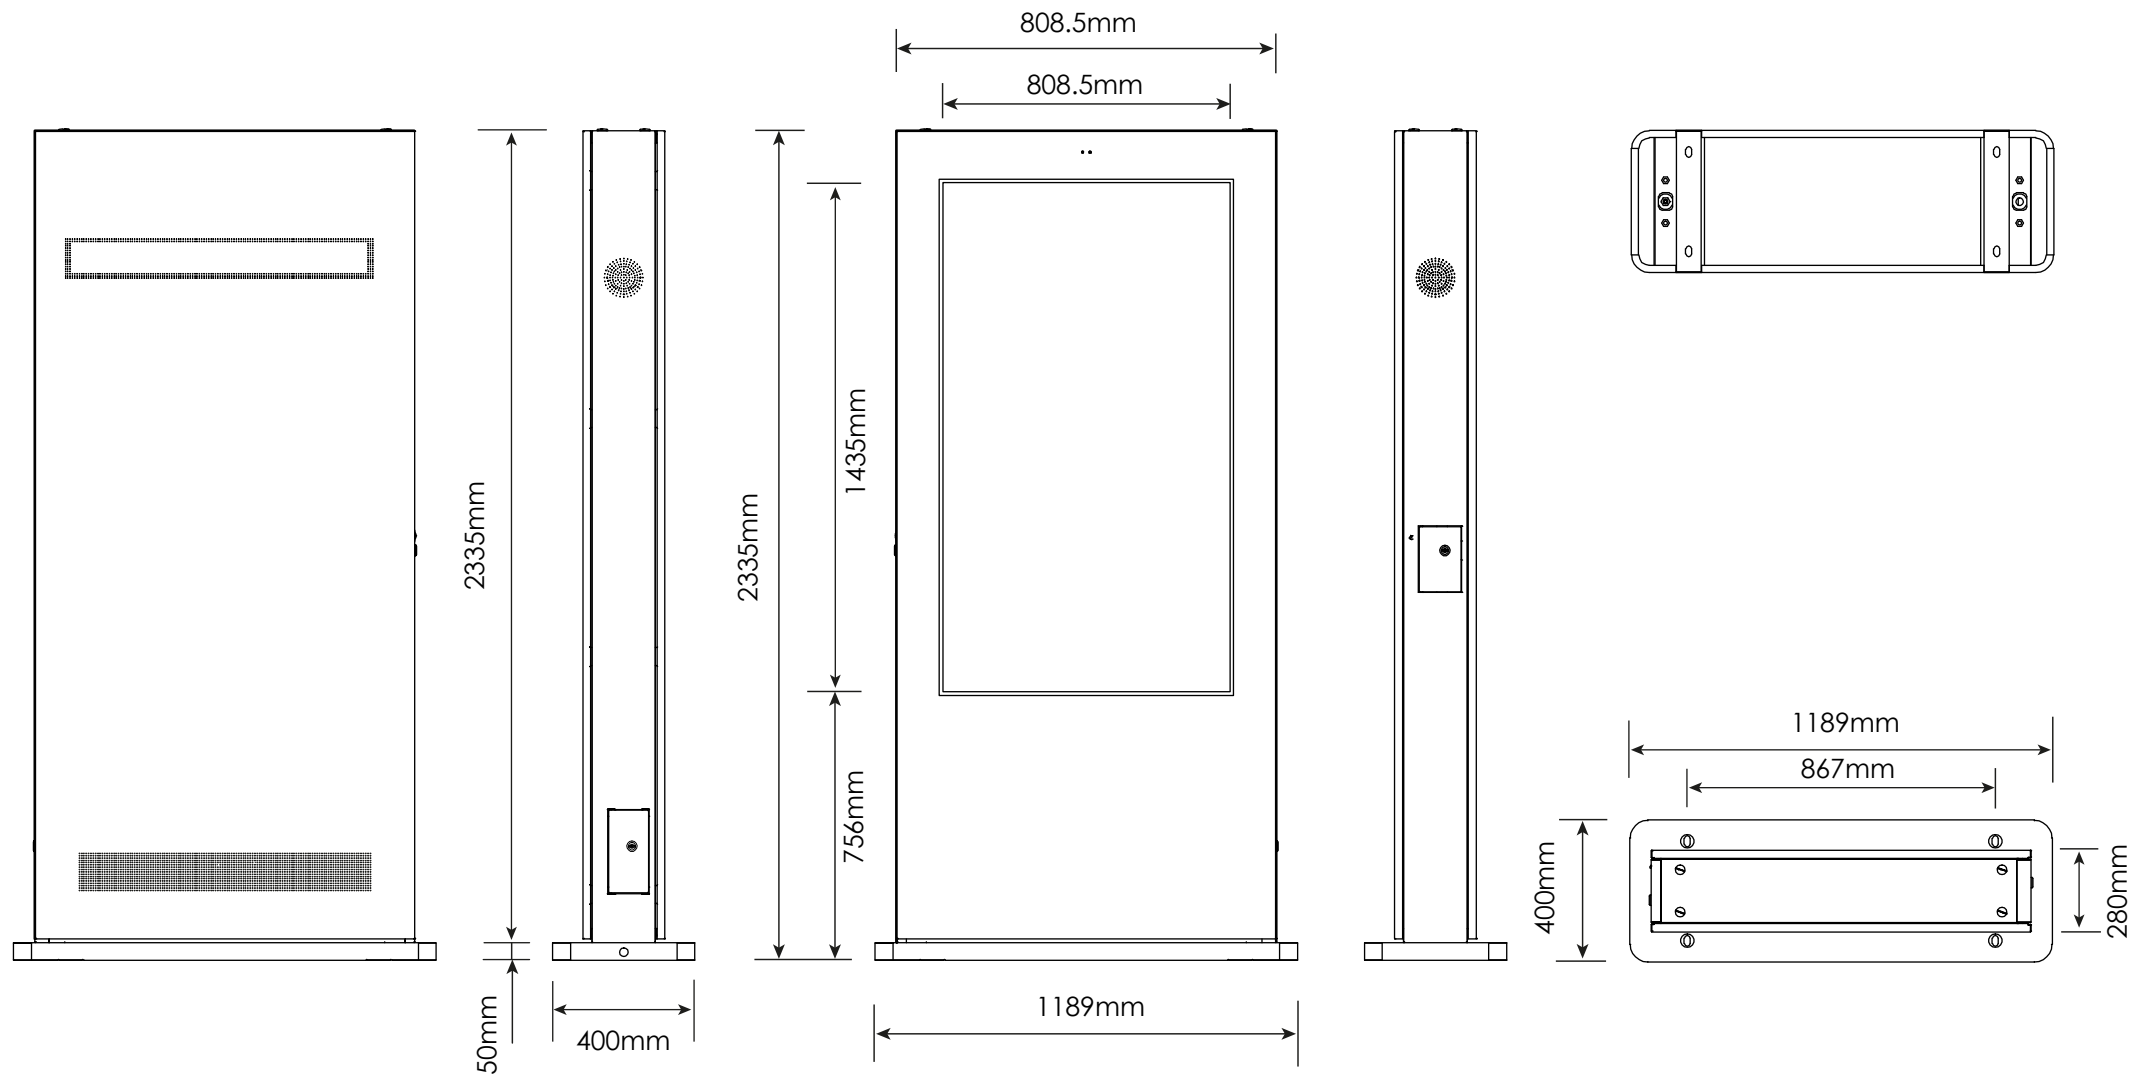

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.




[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794



[promultis]

65" Outdoor Totem double-sided

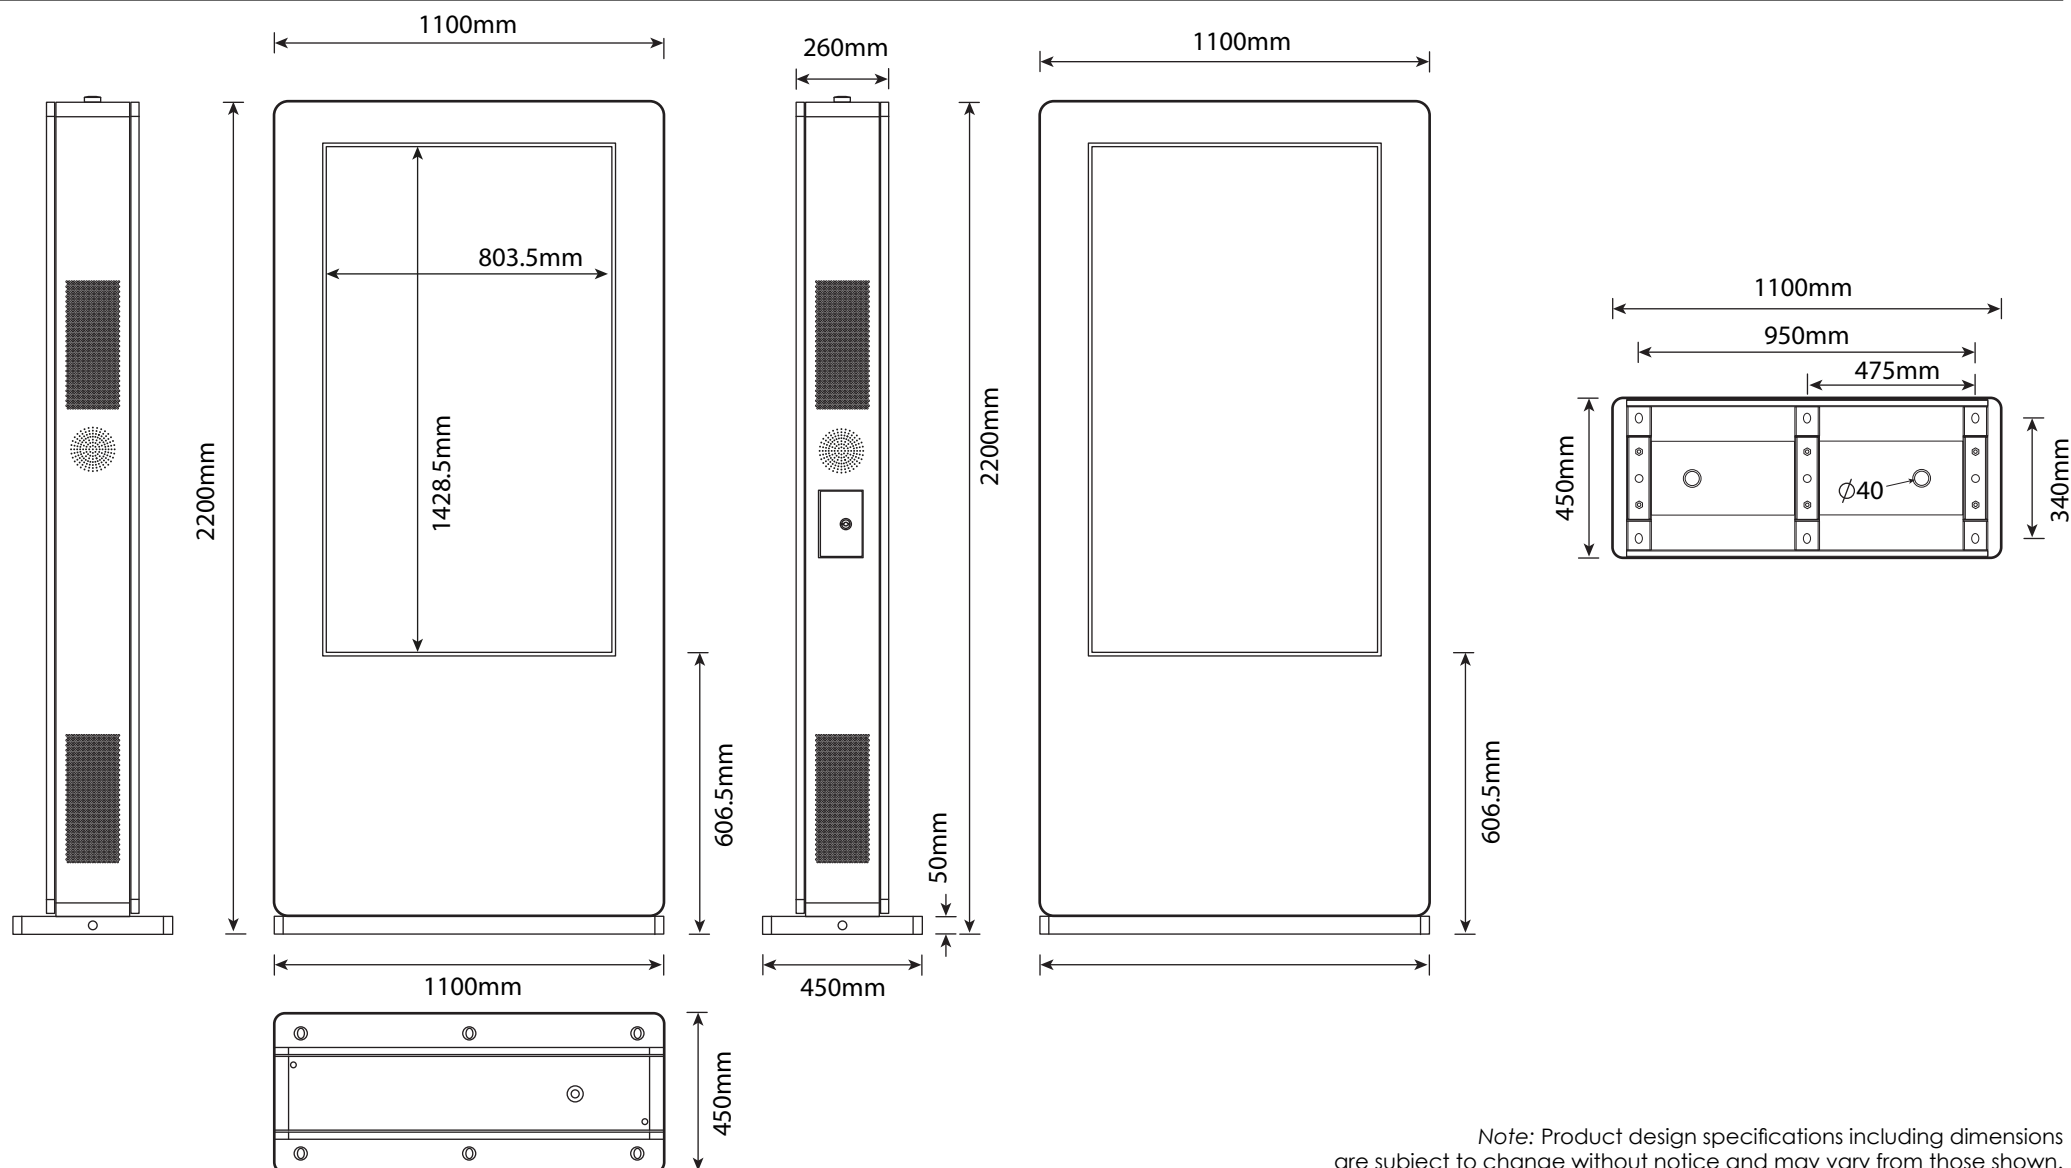

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

CHASSIS FEATURES	
Panel size	75'' TFT-LCD
Display area(mm)/mode	1428.5mm(H) x 803.5mm(W) 16:9
Maximum resolution	1920 x 1080
Display color	16.7M
Pixel Pitch(mm)	0.63mm(H) x 0.63mm(V) (mm)
Brightness (nits) options	1500cd/m ² as standard and up to 3500cd/m ²
Contrast	3500:1
Visual angle	178°/178°
Response time	5ms
Life(hrs)	>60,000(hrs)
INPUT AND OUTPUT	
VGA	1
HDMI	1
USB2.0	2
Audio(L/R) input	1
Audio(L/R) output	1
Speaker	2×10W (8 ohm)
VIDEO	
Color system	PAL
Remote controller	Yes
POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤ 360W
Standby power consumption	<5W


TEMPERATURE	
Working temperature	0°C 50°C
Storage temperature	- 35°C ~ 50°C
Working humidity	85%
Storage humidity	85%
Waterproof grade	Outdoor IP65
Temperature control	Fan cooling as standard or air-conditioning as option
FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P
Split screen display	0.63mm(H) x 0.63mm(V) (mm)
Running subtitle	editable
APPEARANCE	
Panel	White, black, customised
Material	Metal case SPCC
Installation	flood-standing / wall mounted
SERVICE & WARRANTY	
1 year on-site warranty as standard	
Extended warranties and SLA's available at an additional cost	

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]

75" Outdoor Totem

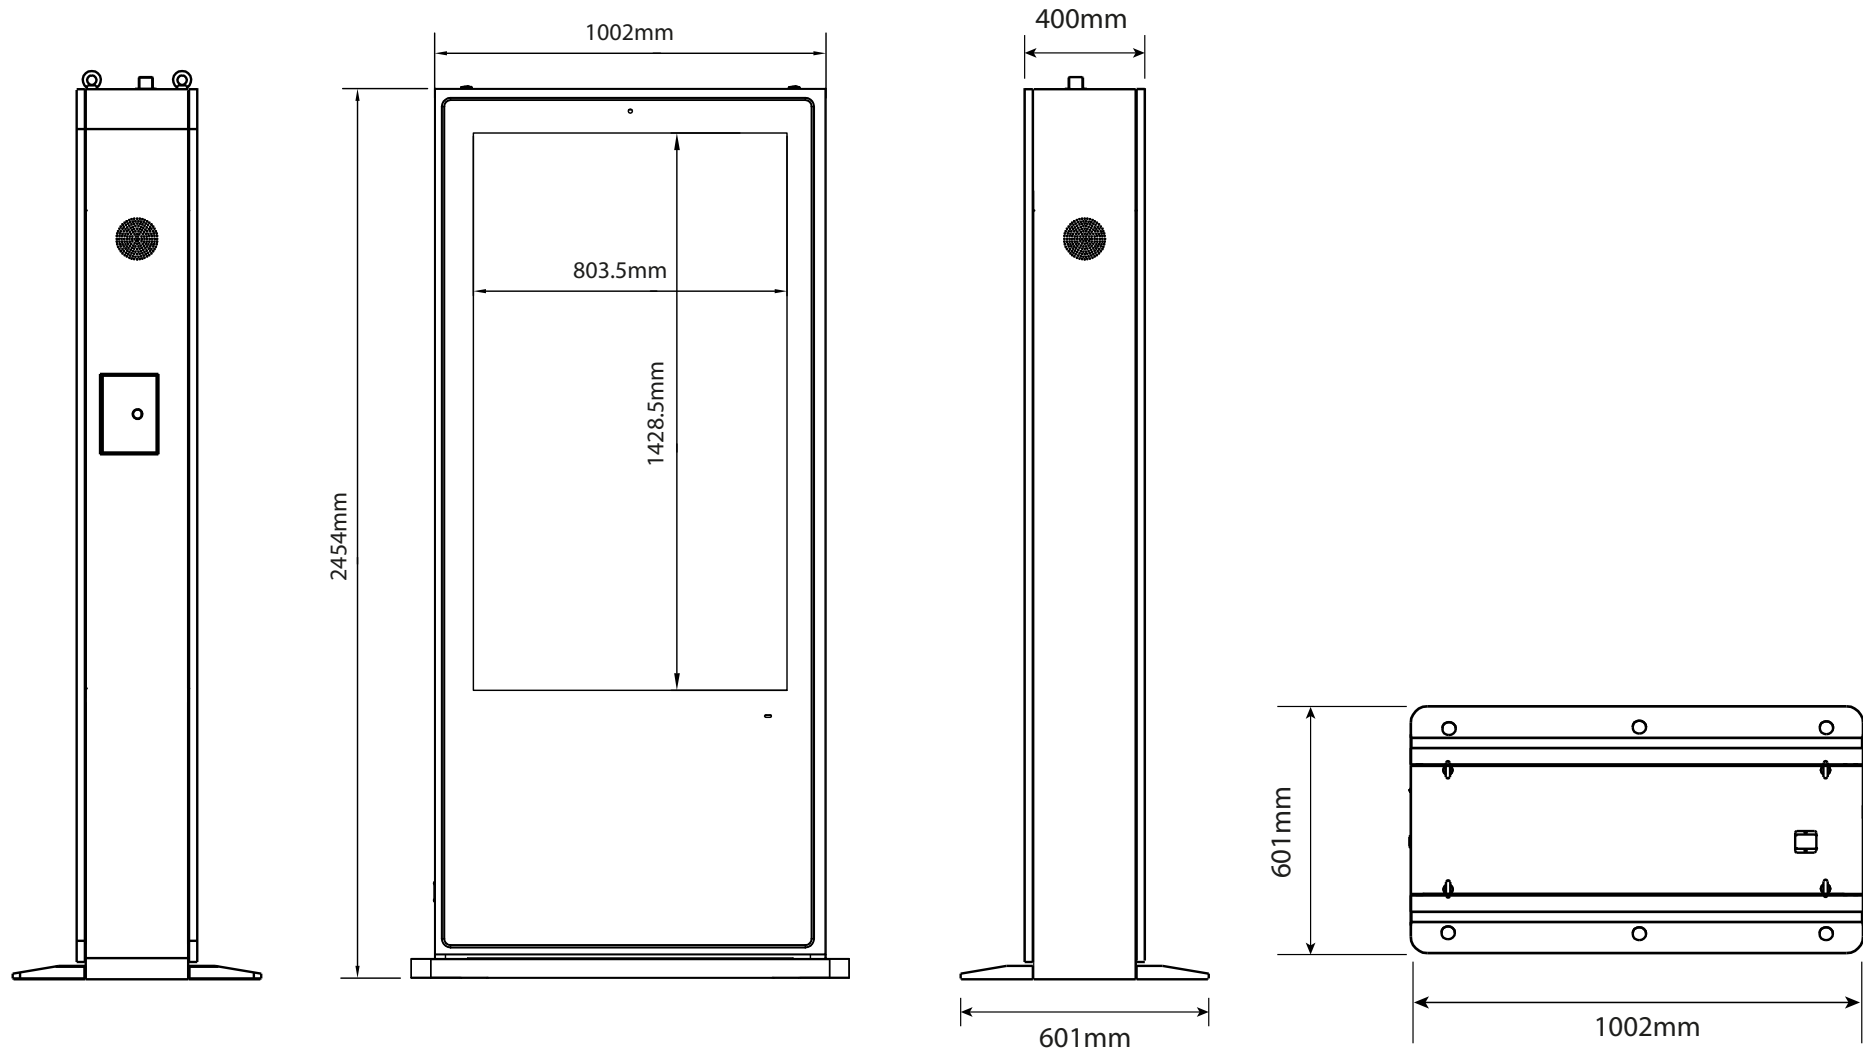

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

CHASSIS FEATURES	
Panel size	84'' TFT-LCD
Display area(mm)/mode	1865mm(H) x 1052mm(W) 16:9
Maximum resolution	1920 x 1080
Display color	16.7M
Pixel Pitch(mm)	0.63mm(H) x 0.63mm(V) (mm)
Brightness (nits) options	1500cd/m ² as standard and up to 3500cd/m ²
Contrast	3500:1
Visual angle	178°/178°
Response time	5ms
Life(hrs)	>60,000(hrs)
INPUT AND OUTPUT	
VGA	1
HDMI	1
USB2.0	2
Audio(L/R) input	1
Audio(L/R) output	1
Speaker	2×10W (8 ohm)
VIDEO	
Color system	PAL
Remote controller	Yes
POWER	
Power supply	AC100~240V 50 /60 HZ
Maximum power consumption	≤ 360W
Standby power consumption	<5W


TEMPERATURE	
Working temperature	0°C 50°C
Storage temperature	- 35°C ~ 50°C
Working humidity	85%
Storage humidity	85%
Waterproof grade	Outdoor IP65
Temperature control	Fan cooling as standard or air-conditioning as option
FUNCTIONS	
Video format	MPEG1/MPEG2/MPEG4/DivX/ASP/WMV/AVI
Audio format	Wave/MP3/WMA/AAC
Image format	JPEG/BMP/TIFF/PNG/GIF
Image resolution	480P/720P/1080P
Split screen display	0.63mm(H) x 0.63mm(V) (mm)
Running subtitle	editable
APPEARANCE	
Panel	White, black, customised
Material	Metal case SPCC
Installation	flood-standing / wall mounted
SERVICE & WARRANTY	
1 year on-site warranty as standard	
Extended warranties and SLA's available at an additional cost	

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]

84" Outdoor Totem

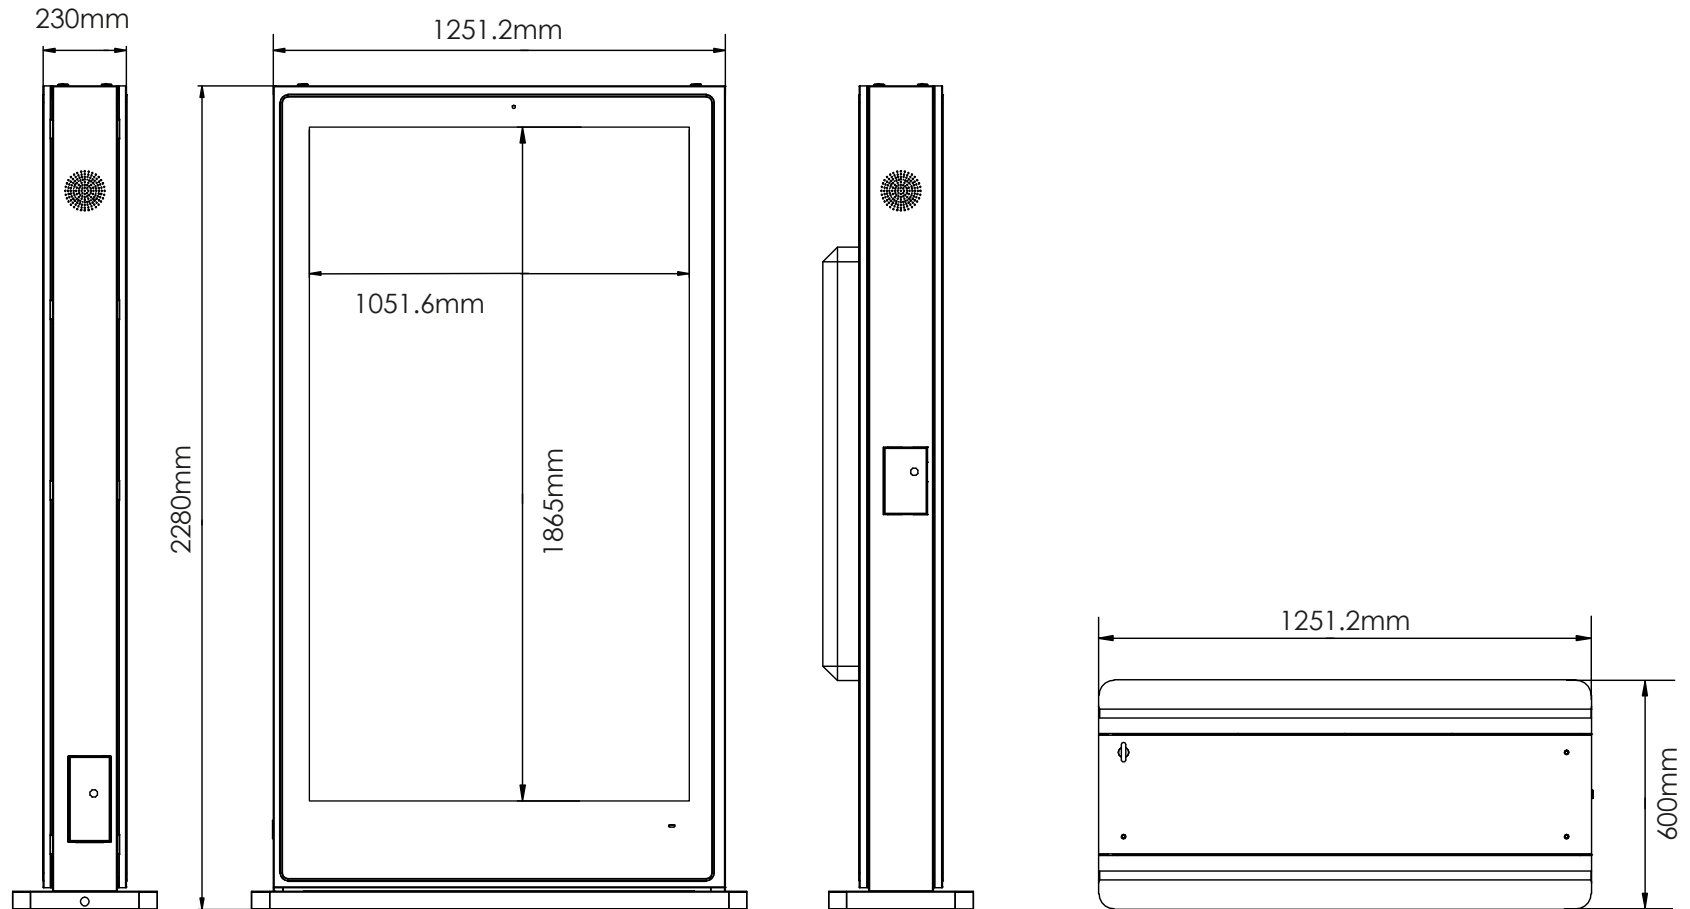

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794