
Promultis TAB 2

The Promultis TAB 2 is a stunning 4K Touchscreen designed with a robust, boxier shape for style & protection.







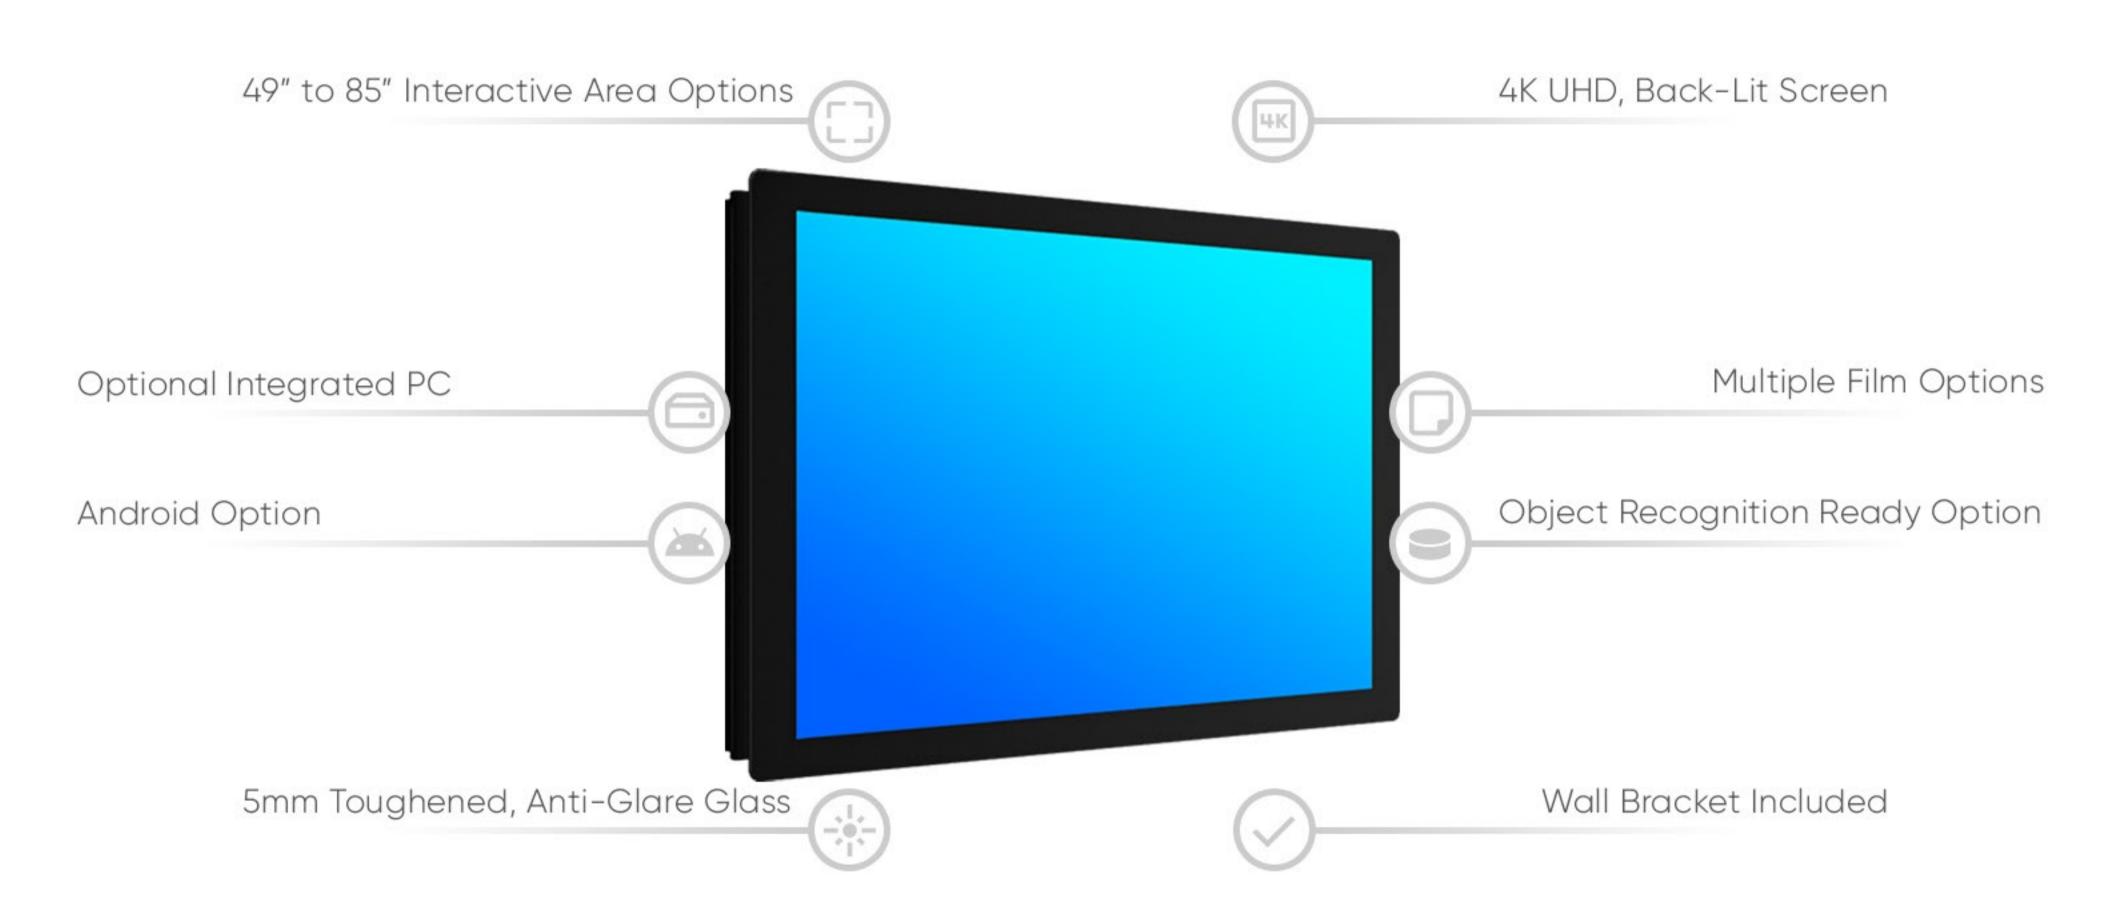

| CHASSIS FEATURES | | |
|-----------------------|-------------------------------|--|
| Materials | Aluminium | |
| Glass Type | Toughened | |
| PANEL | | |
| Interactive Area | 49" 55" 65" 75" 85" | |
| Panel Resolution | 4K UHD | |
| Native Resolution | 3840 x 2160 60Hz | |
| Brightness (Nits) | 450 | |
| Contrast Ratio | 1500:1 | |
| Response Time | 6ms | |
| Aspect Ratio | 16 x 9 | |
| Viewing Angle | 178 °/178 ° | |
| Pixel Pitch | 0.744 (mm) | |
| LCD Illumination | Backlit LED | |
| Speaker | 10W x2 | |
| ENVIRONMENT | | |
| Operating Temperature | 50°F to 104°F (10°C to 40°C) | |
| Operating Humidity | 10% to 80%, non-condensing | |
| Storage Temperature | -4°F to 113°F (-20°C to 45°C) | |
| Storage Humidity | 5% to 95%, non-condensing | |







| PROJECTED CAPACITIVE | | |
|--------------------------------|---|--|
| Detection Method | Projected Capacitive | |
| Input Method | Finger / Gloved Finger | |
| Number of Simultaneous Touches | 40 or 100 Touches | |
| Noise Shielding | DISPLAX XTR-Shield Plus, a proprietary noise filtering technology | |
| Aspect Ratio | 16:9 | |
| Controller | Printed Circuit Board with Mini USB Connector | |
| Adhesive | Permanent | |
| Interface | HID | |
| OS with Multitouch | Windows 8.1, 8, 7, 10; Ubuntu 12.04; Android; Chrome OS | |
| OS with Single Touch | Mac OS X Yosemite | |
| OS with Mouse Emulation | Spinetix Media Player HMP 200 | |
| Data Connectivity | USB2.0 | |
| Touch Accuracy | 1mm Absolute | |
| PERFORMANCE | | |
| Substrate Thickness | Up to 6mm | |
| Touch Response | 5 milliseconds | |
| Calibration | Available Using Control Panel: No Drift | |
| POWER CONSUMPTION | | |
| Average Power Consumption | USB Powered @ 5V | |
| | Peak Consumption: 410mA | |
| | Operation Consumption: 370mA | |







| RELIABILITY | | |
|---------------------------------|--------------------|--|
| Operating Temperature Range | -20°C to 70°C | |
| Operating Humidity Range | 0% to 96% | |
| Life Time Expectancy | Unlimited | |
| Controller Life Time Expectancy | 1 million hours | |
| SHIPPED WITH | | |
| Cables | Power / HDMI / USB | |
| Remote Control | Included | |
| WARRANTY | | |
| 3 Year Warranty | | |







