



[promultis]

Vista Outdoor Digital Signage - IP66



32" - 43" - 55" - 65" - 75"
ACTIVE DISPLAY AREA



SOLID STATE DESIGN
VIRTUALLY MAINTENANCE FREE
NO FANS OR AIR-CON NEEDED



HDMI & USB CONNECTIVITY



FREE STANDING, CEILING HANGING
OR WALL MOUNTED



1 YEAR ON-SITE WARRANTY



HIGH BRIGHTNESS, LED HD SCREEN
2500 NITS



TEMPERED GLASS WITH AR COATING



FULLY-SEALED ENCLOSURE WITH IP66 COMPLIANCE
TO ENSURE DUST FREE AND WATERPROOF



WINDOWS OS / ANDROID OS / TV BOARD (OPTIONS)



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

	VISTA32	VISTA43	VISTA55	VISTA65	VISTA75
Panel Size (inch)	32	43	55	65	75
LCD Manufacturer	Keewin				
Active Display Area (w x h mm)	700 x 394.5	942.5 x 531	1211 x 682	1429 x 805	1650.5 x 929
Resolution (pixel)	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Aspect Ratio	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9
Brightness (nits)	2500	2500	2500	2500	2500
Contrast Ratio	4000 :1	4000 : 1	4000 : 1	4000 : 1	4000 : 1
Grey to Grey Response Time (ms)	12	12	12	12	12
Viewing Angle (H/V)	178° / 178°				
Backlight Configuration	Direct LED				
Operational Life Cycle-mtbf (hours)	50,000				
Power					
Input Voltage	110V / 220V AC, 50-60Hz				
Leakage Protection	30mA/0.1S				
Surge Protection	class B (II level classification test)				
Max Power Consumption (w)	155	290	310	580	950


	VISTA32	VISTA43	VISTA55	VISTA65	VISTA75
Panel Size (inch)	32	43	55	65	75
Enclosure					
IP Rating	IP66	IP66	IP66	IP66	IP66
Enclosure Material	Aluminum + Zinc Powder Coating				
Enclosure Lifetime	5 years				
Glass Type	Tempered Glass				
Glass Type	Transmissivity > 93%, Reflectivity < 2%				
Unit Dimension (w x h x d mm)	491.5 x 797 x 100	628 x 1039.5 x 100	779 x 1308 x 100	902 x 1527 x 100	1027 x 1748.5 x 100
Bezel Width (mm)	48.5	48.5	48.5	48.5	49
Weight (kg)	35	40	50	85	120
Environment					
Operating Environment	Fully Outdoor				
Operating Temperature	-20 °C ~ +45 °C				
Operating Humidity	5% ~ 98%				
Operating Altitude (m)	≤2000				
Media (Options)					
	CPU	Memory	Storage	OS	I/O
Windows OS	Core / Celeron / Atom	4 / 8 / 16 / 32 Gb	128 / 256 / 512 Gb	Win 10/11	VGA / HDMI / USB / RS232 / RJ45
Android OS	Rockchip / Allwin	1 / 2 / 4 Gb	8 / 16 / 32 / 64 / 128 Gb	Android	VGA / HDMI / USB / RS232 / RJ45
TV Board	Mstar / NOATEK				VGA / HDMI / USB
Options	Touch Screen / Camera/ NFC / RFID / Ultrasonic / LED Strip / 4G / Wi-Fi / Bluetooth / Printer / Scanner / Pos / Charging Gun / Speaker				

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.



[promultis]

55" Vista Outdoor Screen Dimensions

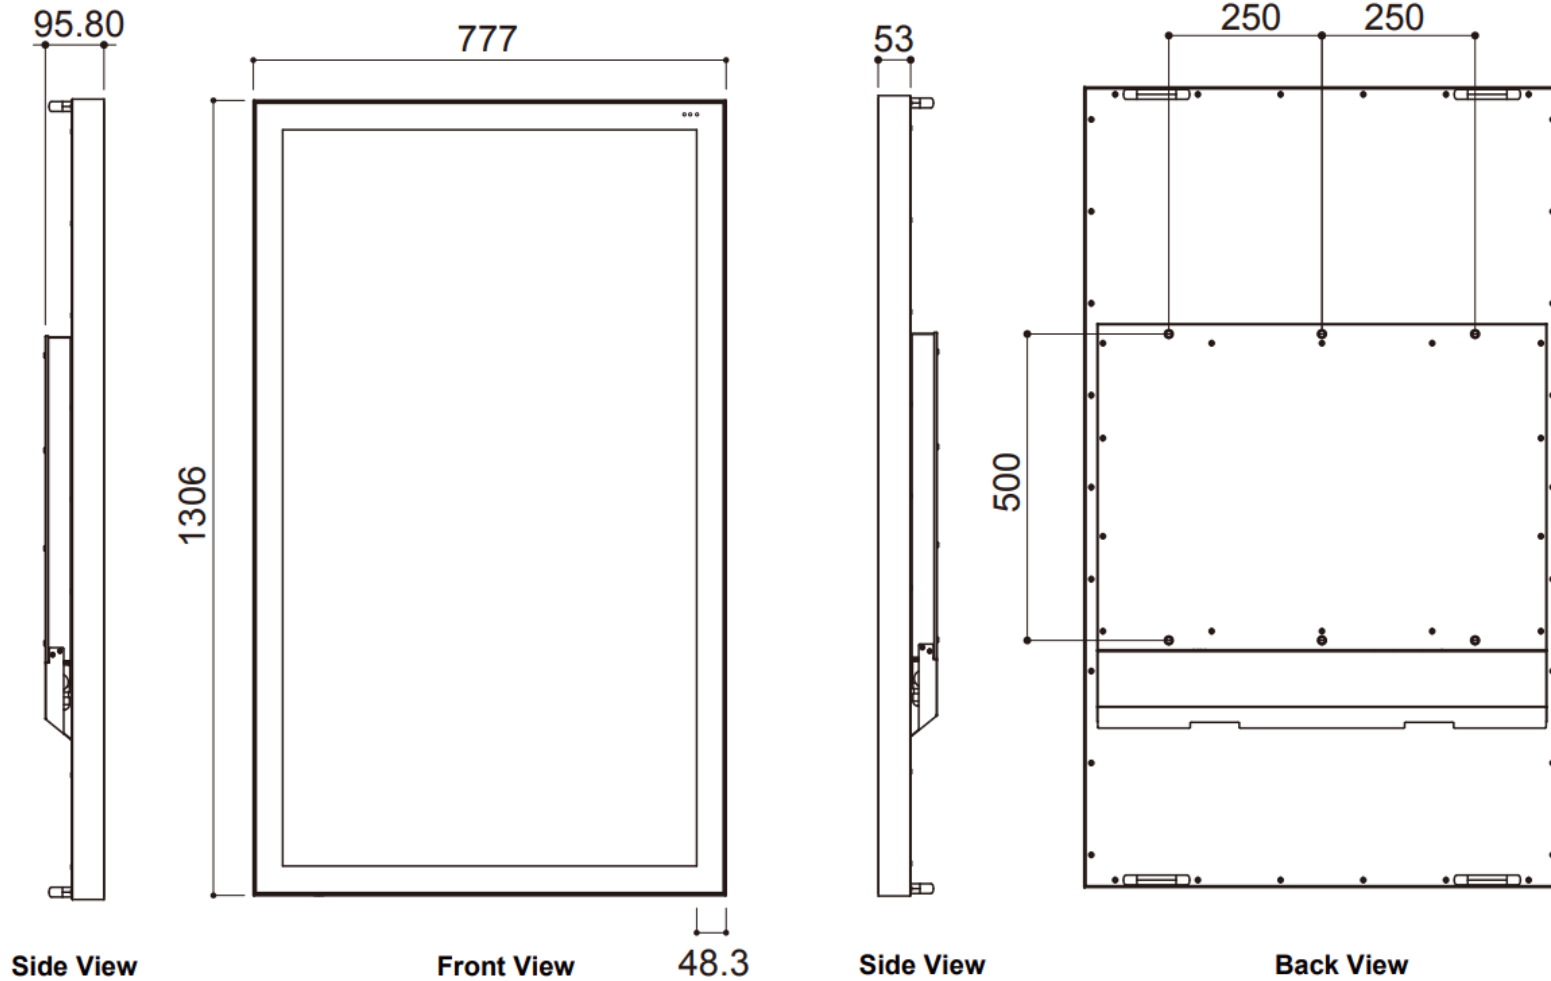

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.