



[promultis]

# Vista Outdoor Digital Signage - IP66



32" - 37" - 43" - 55" - 75"  
ACTIVE DISPLAY AREA



VGA, HDMI, USB, RS232 &  
RJ45 CONNECTIVITY




FREE STANDING, CEILING HANGING  
OR WALL MOUNTED



10 TOUCH POINTS OPTION  
+ CAMERA, RFID, NFC, WI-FI, 4G,  
BLUETOOTH OPTIONS



3 YEAR ON-SITE WARRANTY

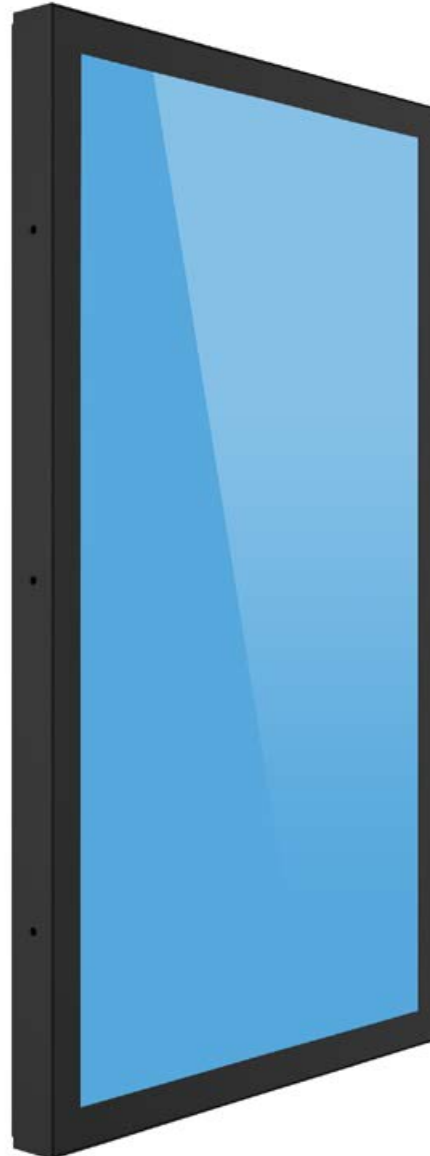

HIGH BRIGHTNESS, LED HD SCREEN  
FROM 2000 NITS UP TO 2500 NITS



TEMPERED GLASS WITH AR COATING



FULLY-SEALED ENCLOSURE WITH IP66 COMPLIANCE  
TO ENSURE DUST FREE AND WATERPROOF



TEMPERATURE CONTROL SYSTEM  
MAINTENANCE FREE WITH NO FANS, VENTS OR FILTERS



WINDOWS OS / ANDROID OS / TV BOARD



[promultis]  
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
or call +44 (0) 239 251 2794

	VISTA32	VISTA37	VISTA43	VISTA55	VISTA75
Panel Size (inch)	32	37	43	55	75
LCD Manufacturer	Samsung / LG / AUO / Sharp / Keewin				
Active Display Area (w x h mm)	698 x 392	899 x 253	941 x 529	1210 x 680	1650 x 928
Resolution (pixel)	1920 x 1080	1920 x 540	1920 x 1080	1920 x 1080	1920 x 1080
Aspect Ratio	16 : 9	16 : 4.5	16 : 9	16 : 9	16 : 9
Brightness (nits)	2000	2500	2500	2500	2500
Contrast Ratio	1100 : 1	4000 : 1	4000 : 1	4000 : 1	4000 : 1
Grey to Grey Response Time (ms)	10	16	12	12	6
Viewing Angle (H/V)	178° / 178°				
Backlight Configuration	Direct LED				
Operational Life Cycle-mtbf (hours)	50,000				
Micro-Controller					
Automatic Brightness	Yes				
Automatic Cooling	Yes				
Power					
Input Voltage	AC220/110 V ± 10%, 50 / 60 HZ				
Max Power Consumption (w)	120	130	210	340	820


	VISTA32	VISTA37	VISTA43	VISTA55	VISTA75
Panel Size (inch)	32	37	43	55	75
Enclosure					
IP Rating	IP66	IP66	IP66	IP66	IP66
Enclosure Material	Galvanized steel + zinc powder				
Enclosure Lifetime	5 years, fully outdoor, No color-fading, paint-shedding, rusting				
Glass Type	Tempered glass with AR coating				
Glass Type	Transmissivity > 93%, Reflectivity < 2%				
Unit Dimension (w x h x d mm)	797 x 491.5 x 91.5	998 x 352 x 91.5	1040 x 691 x 91.5	1309 x 779 x 91.5	1749 x 1027 x 91.5
Bezel Width (mm)	48.5	48.5	48.5	48.5	48.5
Weight (kg)	35	40	55	85	120
Environment					
Operating Environment	Exposure to direct sunlight, rain, snow and dust				
Operating Temperature	-20 °C ~ +50 °C				
Operating Humidity	5% ~ 98%				

Media					
	CPU	Memory	Storage	OS	I/O
Windows OS	Core / Celeron / Atom	4 / 8 / 16 / 32 Gb	128 / 256 / 512 Gb	Win 7 / 10	VGA / HDMI / USB / RS232 / RJ45
Android OS	Rockchip / Allwin	1 / 2 / 4 Gb	8 / 16 / 32 / 64 / 128 Gb	Android 4.4 - 8	VGA / HDMI / USB / RS232 / RJ45
TV Board	Mstar / NOATEK				VGA / HDMI / USB
Options	Touch Screen / Camera/ NFC / RFID / 4G / Wi-Fi / Bluetooth				




[promultis]


# Vista Outdoor Digital Signage Display Solutions

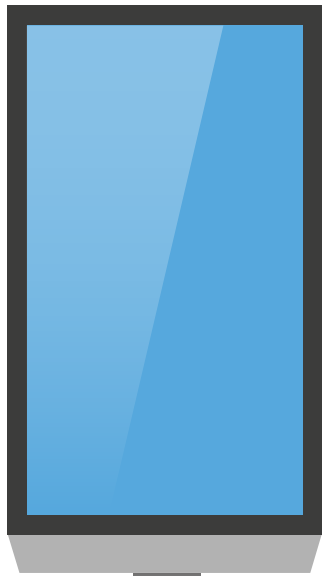


Plinth

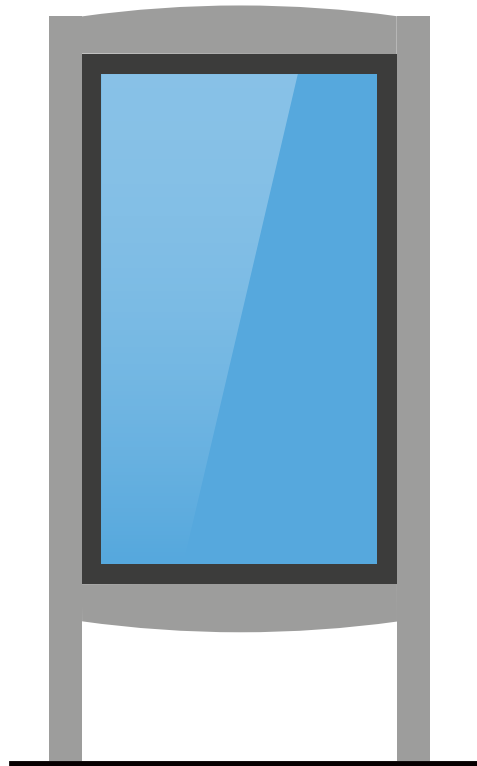

Surround with feet

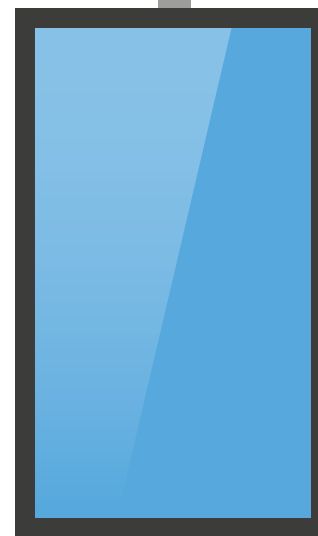

Ceiling mount

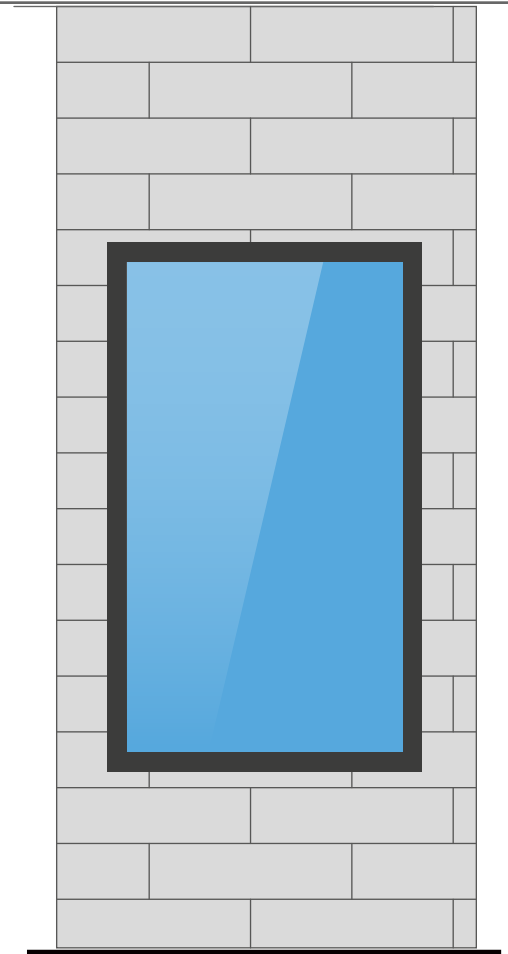

Wall mounted

Please note: Support structures not included in price




[promultis]  
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
or call +44 (0) 239 251 2794



[promultis]


# Vista 75" Outdoor Digital Signage

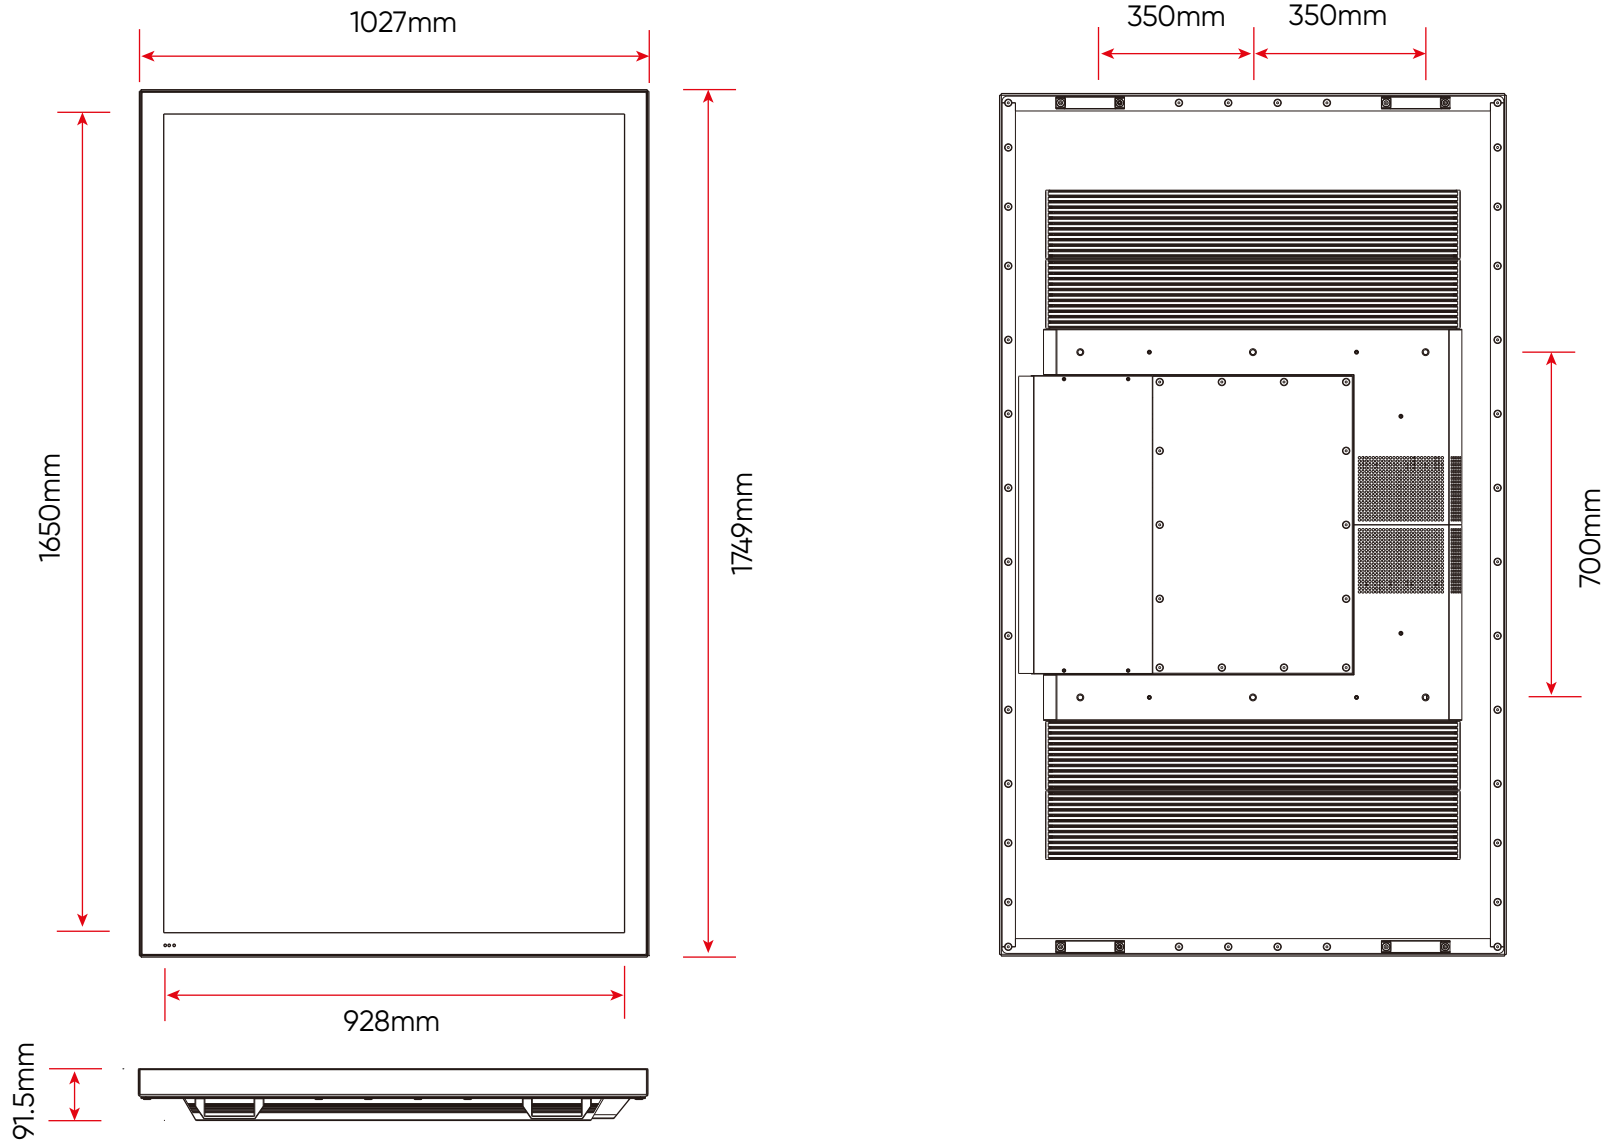



[promultis]

# Vista 55" Outdoor Digital Signage

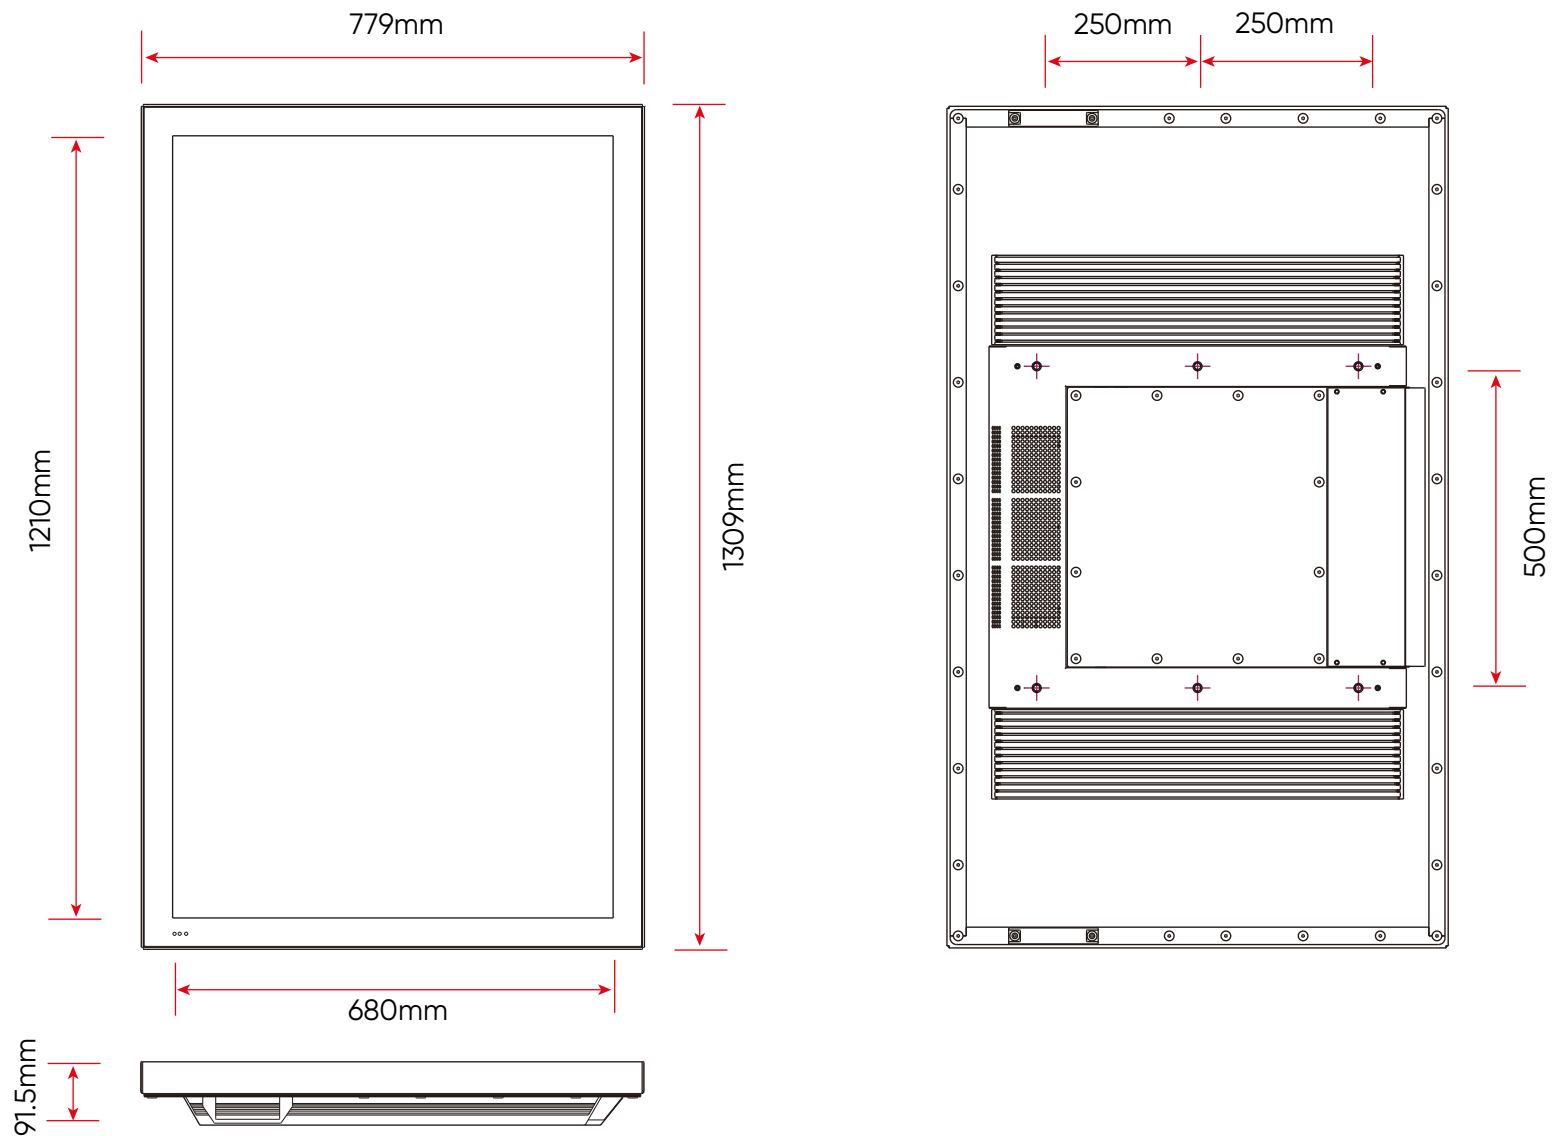


[promultis]  
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit  
[www.promultis.info](http://www.promultis.info)  
or call +44 (0) 239 251 2794



[promultis]

# Vista 43" Outdoor Digital Signage

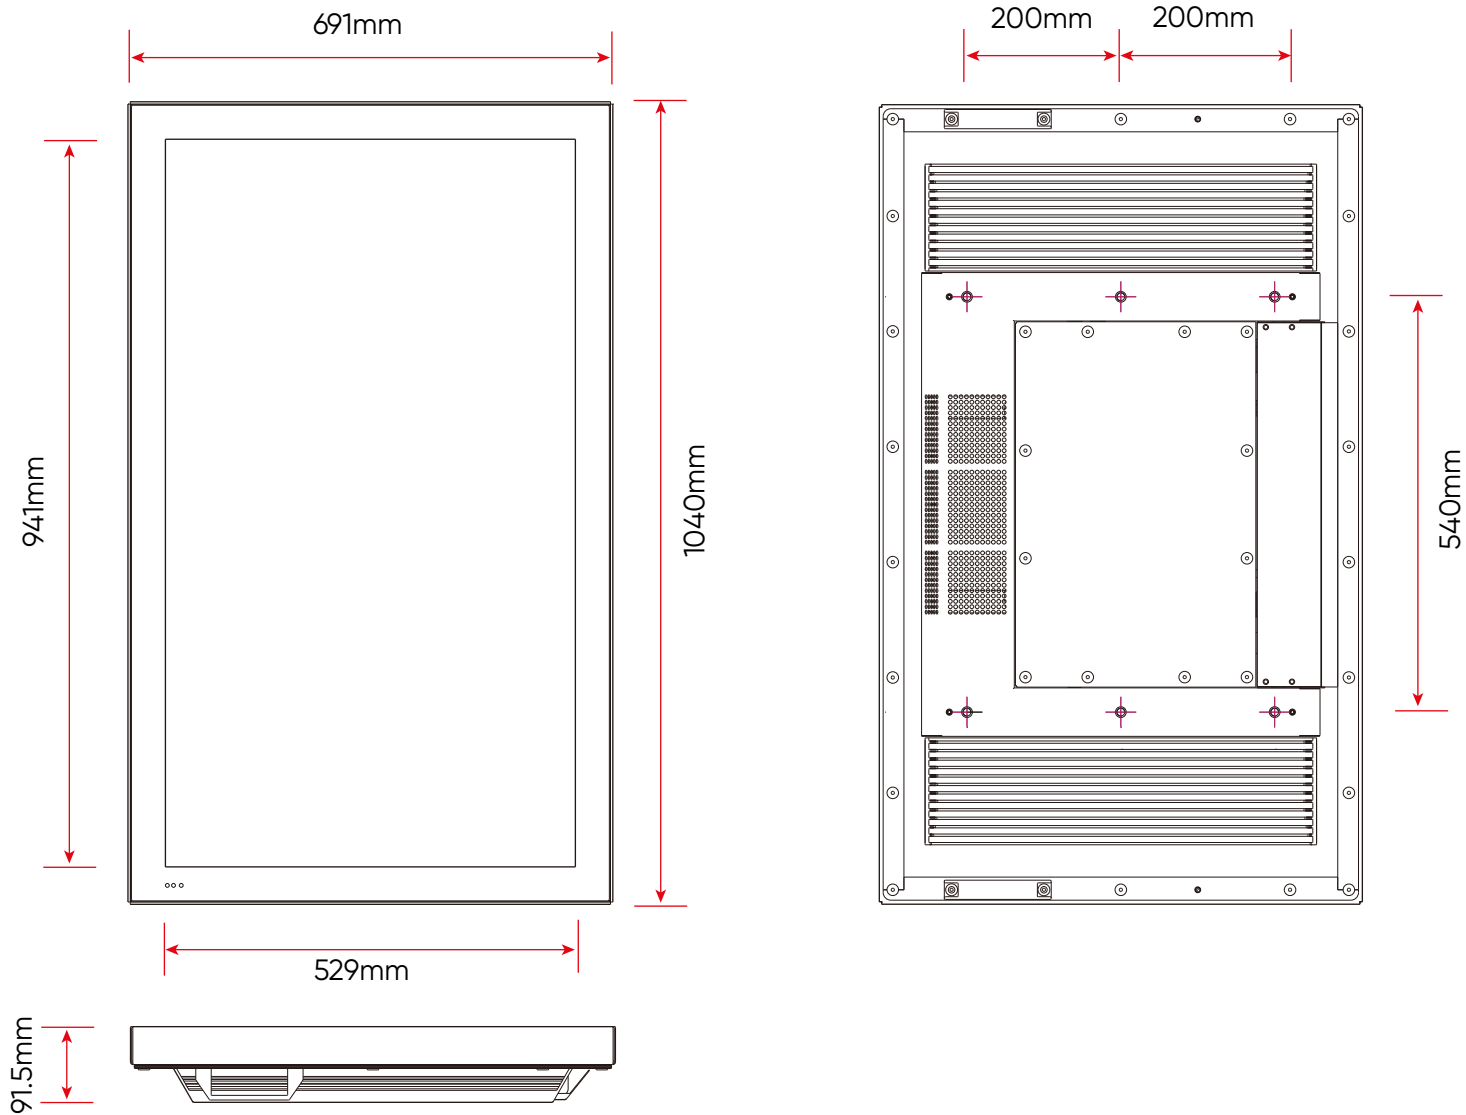



[promultis]

# Vista 32" Outdoor Digital Signage

