



[promultis]

Standard Kiosk

Create an inviting and imersive information point with the Promultis Standard Kiosk. Ideal for digital signage and wayfinding solutions.



43" TO 65" SCREENS AVAILABLE



100 TOUCH POINTS WITH PROJECTED CAPACITIVE TECHNOLOGY




32 TOUCH POINTS WITH INFRARED



OPTIONAL i5 or i7 PC



HDMI AND USB CONNECTIVITY

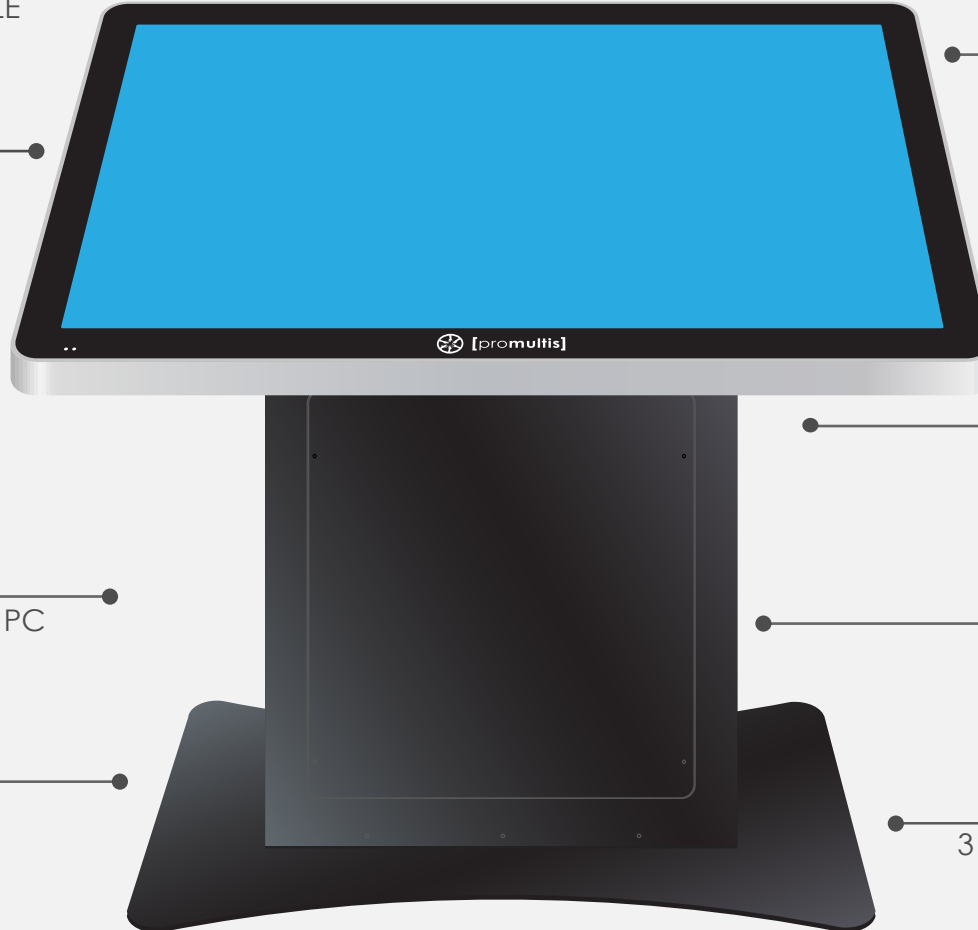

1080p HD OR 4K UHD BACK-LIT LED SCREEN



TEMPERED GLASS



EXTERNAL USB PORTS*
*ON SOME MODELS



SECURE PC COMPARTMENT AND CABLE MANAGEMENT



3 YEAR REPAIR OR REPLACE WARRANTY



[promultis]
MULTITOUCH SOLUTIONS

For more exciting multitouch products visit
www.promultis.info
or call +44 (0) 239 251 2794

The Promultis standard kiosk has been designed for indoor use and is an ideal way to engage your audience with content that can inform, attract, entertain and educate.

The Promultis Kiosk is available in a variety of configurations that can suit any budget and any situation! Constructed with only the highest-grade components, our commercial LED screens are available with 1080p or 4K resolution and up to 800 nit high brightness.

Making the Promultis Kiosk perfect for use in areas with excessive light such as foyers and exhibition halls. you have the option of 43", 48", 55" or 65" screens and also a choice between the very latest infra-red technology which allows up to 32 touches or projected capacitive touch technology which allows for 100 touch points.

The Promultis has a discreet, lockable cabinet with two shelves to house the PC and effective cable management.



Promultis Standard Kiosk is ideal for

- Retail Environments
- Exhibitions & Events
- Corporate Spaces
- Hospitality
- Transportation
- Entertainment

Integrated USB connections


Includes 4 USB ports accessible from the sides of the table for connection to external devices.



Projected Capacitive Kiosk for a specialist fit out and finishing contractor visitor center including Promultis bespoke software featuring a corporate presentation featuring the companies services and case studies.



The Promultis Standard Kiosk has a very sleek and contemporary appearance, however, sometimes you need something just that little more exclusive. We offer you the additional option to completely customise the housing of the kiosk to fit with your branding or campaign messages.

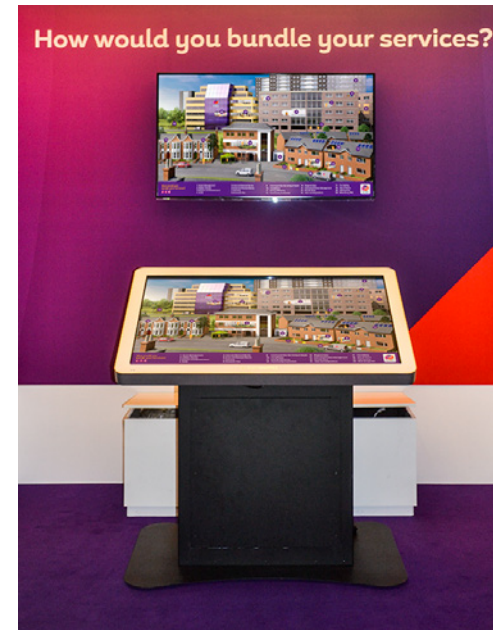


Promultis developed the software for the display presentation using corporate assets supplied by Mitie. The presentation included an interactive PDF viewer showing each facility and a custom made Snowflake game called Tap Tastic.

Complete Hardware & Software Solution from Promultis

Promultis can completely customise the unit with your branding while also providing interactive, touch software and digital signage solutions to meet your presentation and education needs.


Bespoke Interactive Software

Engage with customers through a fully branded, interactive application with multi-user, collaborative interface incorporating your corporate identity, images, literature, audio files, videos, web sites and social media.

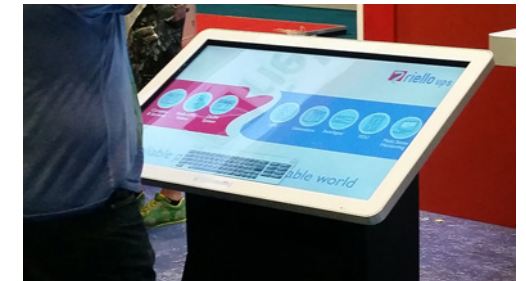

Software options

The Snowflake Suite Ultimate is perfect for education and training, its fully featured with all over 52 apps, including presentation, creativity and productivity tools, as well as games. It is intuitive and easy to use and customisable to suit your needs.

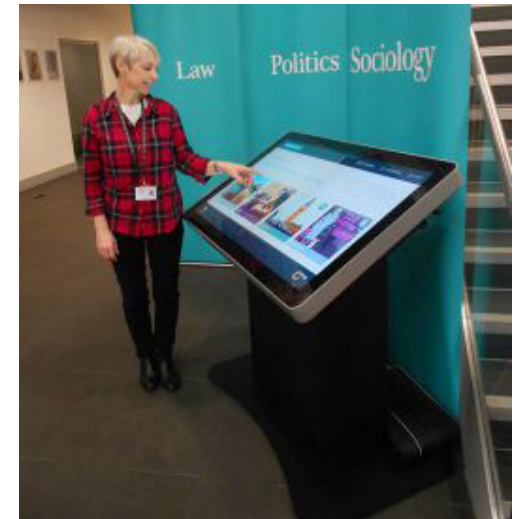

Information portal and wayfinding for University of SussexA Promultis freestanding kiosk in the foyer as an information point for University

CHASSIS FEATURES	
Materials	Aluminum & Steel
Glass type	Toughened full transmittivity
Lockable Storage	Cable Mangement and PC shelf
PANEL	
Screen Options	43" 48" 55" 65"
Panel resolution	1080p HD OR 4K UHD0°
Native resolution	3840 x 2160 60Hz
Brightness (nits)	450
Contrast ratio	1500 to 1
Response time	6ms
Aspect ratio	16x9
Viewing angle	178° / 178°
Pixel pitch	0.744 (mm)
LCD Illumination	Backlit LED
Speaker	10W x2
ENVIRONMENT	
Operating temperature	50°F to 104°F (10°C to 40°C)
Operating Humidity	10% to 80%, non-condensing
Storage Temperature	-4°F to 113°F (-20°C to 45°C)
Storage Humidity	5% to 95%, non-condensing
SHIPPED WITH	
Cables	Power USB HDMI
Remote control	Included
Screen freeze function	On remote control
User manual	Included
WARRANTY	
3 year repair or replace warranty as standard	
Extended warranties and SLA's available at an additional cost	

INFRA RED TOUCH	
Touch Points	10, 16/20 & 32
Touch sensitive to	Finger, Opaque object, Stylus
Sunlight Sensitivity	Can be used in direct sunlight
Interpolation	32,768x32,768
Response time	Repeated touch <6ms
Drift	None
Temperature	-20°C~60°C
Accuracy	±2mm
Interface	USB-2
Relative Humidity	10%~90%RH
Supported	OS Windows, MAC, Linux, Android
PROJECTED CAPACITIVE	
Detection method	Projected Capacitive
Input method	Finger and gloved finger
Number of simultaneous touches	100
Noise Shielding	DISPLAX XTR-Shield™ Plus, a proprietary noise filtering technology
Aspect ratio	16:9
Controller	Printed circuit board with mini USB connector
Adhesive	Permanent
Interface	HID
OS with multitouch	Windows 8.1, 8, 7*: Ubuntu 12.04**, Android**, Chrome OS***
OS with single touch	Mac OS X Yosemite
OS with mouse emulation	Spinetix Media Player HMP 200

* Home Premium SP1; Professional SP1 Ultimate x64 SP1 ** Depending on kernel and multitouch support. *** 39.0.2171.85(64 bit)

Data connectivity	USB 2.0
Touch accuracy	1mm absolute
Sensor weight	260 g
Controller weight	60 g
PERFORMANCE	
Substrate thickness	Up to 6mm
Touch response	5 milliseconds
Calibration	Available using control panel: no drift
POWER CONSUMPTION	
Average power consumption (P)	USB powered @ 5V
	Peak consumption: 410 mA
	Operation consumption: 370mA
RELIABILITY	
Operating temperature range	-20°C to 70°C
Operating humidity range	0% to 96%
Life time expectancy	Unlimited
Controller life time expectancy	1 million hours



[promultis]

Standard Kiosk with 55" screen

