

Varitilt Elite Mobile Interactive Table

Large electric height and tilt adjustable mobile table with robust interactive touch screen. Ideal for Schools, Colleges, Universities, Hospitality Suites, Training Areas and Trade Shows.







If you require an interactive, multitouch screen that is both mobile and has an easy to use configuration of screen height and angle then the Promultis Varitilt Elite is the solution.

The Promultis Varitilt Elite is one of our most versatile products and is available in a variety of screen sizes from 65" all the way up to 86". Utilising either Projected Capacitive or Infra-red touch technology with the 4K UHD screen. The real selling point with this range however, is it's flexibility and mobility!


The Promultis Varitilt Elite has height and tilt adjustment, the height elevation is adjusted by two powered columns to provide stability and finite adjustment. This allows the platform to be lifted, or lowered, effortlessly at the touch of a remote control.





The Varitilt Elite also features fully powered tilt adjust. With its floor levelling castors, the Promultis Varitilt products can also be moved easily from room to room.

This product can be used as a very low table (improving accessibility for children and wheelchair users) or used as a high standing desk, or even tilted as a fully upright display or kiosk, means the Varitilt can be utilised in a wide variety of applications. The portability and flexibility of the Varitilt range has proven very popular in the education, SEN (Special Educational Needs), and the training market sectors.

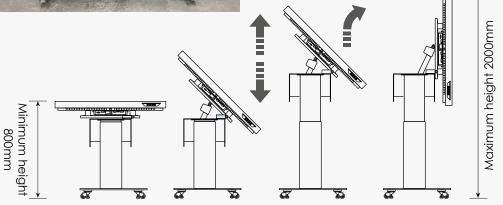

Colour bezel, graphics and logos

Select a colour for your bezel and add a corporate logo and apply graphics.



Immerse Bespoke Interactive Software from Promultis

Promultis offers a bespoke software creation service where our software development team will create a multitouch interactive experience to run on your touch table. Visit our website at https://immerse.promultis.info/ for example applications and case studies.



Software options

The Snowflake Suite Ultimate is perfect for education and training, its fully featured with over 52 apps, including presentation, creativity and productivity tools, as well as games. It is intuitive and easy to use and customisable to suit your needs.



Object Recognition Ready

Object recognition is the ability to drop an interactive puck onto the screen and the screen to react to that object and display relevant content such as videos, pictures and graphics. Promultis offers an object recognition software service detailed on the Immerse website.






CHASSIS FEATURES		
Materials	Aluminium	
Glass type	Toughened	
Tray	Cable Management and PC shelf	
Mobility	4 Professional Floor Levelling Castors	
PANEL		
Interactive area	42" 48" 55" 65"	
Panel resolution	4K UHD 3840 x 2160	
Native resolution	3840 x 2160 60Hz	
Brightness (nits)	450	
Contrast ratio	1500 to 1	
Response time	6ms	
Aspect ratio	16x9	
Viewing angle	178° / 178°	
Pixel pitch	0.744 (mm)	
LCD Illumination	Backlit LED	
Speaker	10W x2	
ENVIRONMENT		
Operating temperature	50°F to 104°F (10°C to 40°C)	
Operating Humidity	10% to 80%, non-condensing	
Storage Temperature	-4°F to 113°F (-20°C to 45°C)	
Storage Humidity	5% to 95%, non-condensing	
SHIPPED WITH		
Cables	Power USB HDMI	
Remote control	Included	
User manual	Included	
WARRANTY		
3 year on-site warranty as standard		
Extended warranties and SLA's available at an additional cost		

INFRA RED TOUCH		
Touch Points	32	
Touch sensitive to	Finger, Opaque object, Stylus	
Sunlight Sensitivity	Can be used in direct sunlight	
Interpolation	32,768x32,768	
Response time	Repeated touch <6ms	
Drift	None	
Temperature	-20°C~60°C	
Accuracy	±2mm	
Interface	USB-2	
Relative Humidity	10%~90%RH	
Supported	OS Windows, MAC, Linux, Android	
PROJECTED CAPACITIVE		
Detection method	Projected Capacitive	
Input method	Finger and gloved finger	
Number of simultaneous touches	10 / 20 / 100	
Noise Shielding	DISPLAX XTR-Shield™ Plus, a proprietary noise filtering technology	
Aspect ratio	16:9	
Controller	Printed circuit board with mini USB connector	
Adhesive	Permanent	
Interface	HID	
OS with multitouch	Windows 8.1, 8, 7, 10: Ubuntu 12.04; Android; Chrome OS	
OS with single touch	Mac OS X Yosemite	
OS with mouse emulation	Spinetix Media Player HMP 200	
Data connectivity	USB 2.0	
Touch accuracy	1mm absolute	

PERFORMANCE	
Substrate thickness	Up to 6mm
Touch response	5 milliseconds
Calibration	Available using control panel: no drift
POWER CONSUMPTION	
Average power consumption (P)	USB powered @ 5V
	Peak consumption: 410 mA
	Operation consumption: 370mA
RELIABILITY	
Operating temperature range	-20°C to 70°C
Operating humidity range	0% to 96%
Life time expectancy	Unlimited
Controller life time expectancy	1 million hours




Varitilt Elite with 85" Projected Capacitive Touch screen

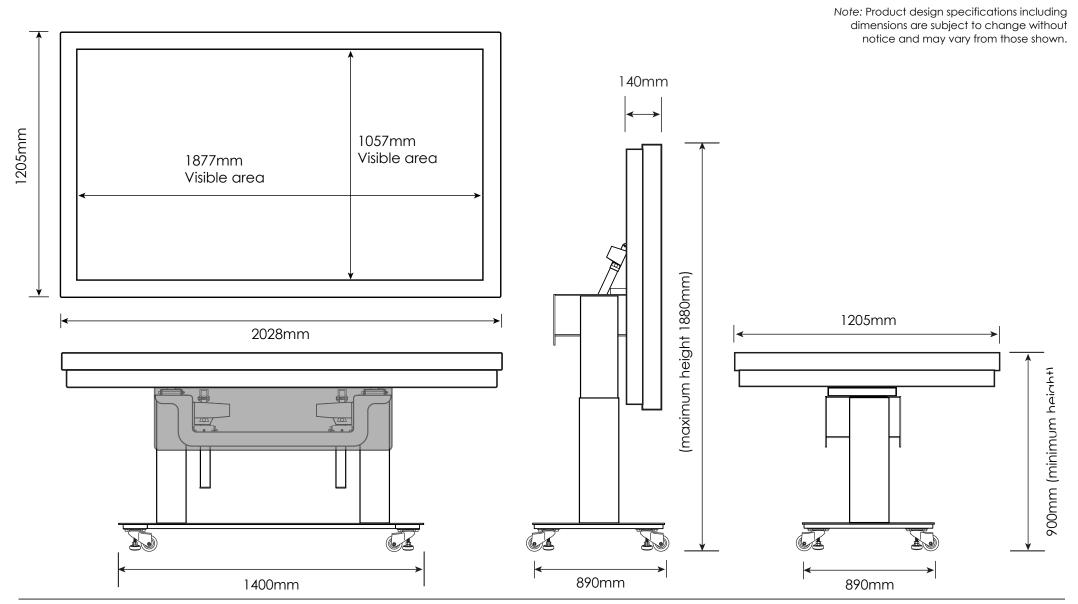





Varitilt Elite with 75" Projected Capacitive Touch screen

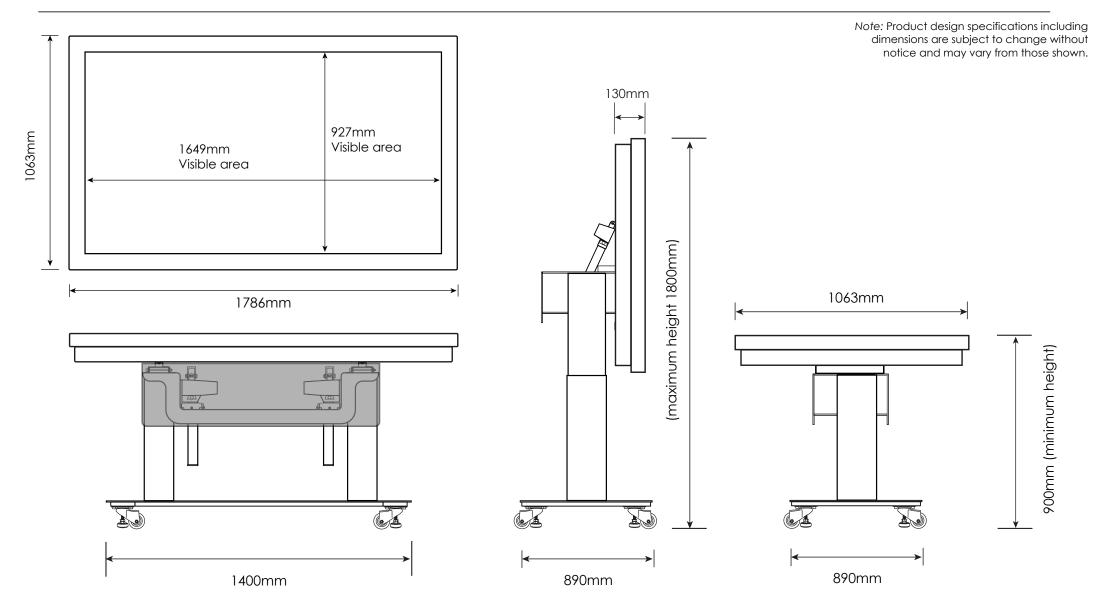





Varitilt Elite with 65" Projected Capacitive Touch Screen

Note: Product design specifications including dimensions are subject to change without notice and may vary from those shown.

